
Finite-time confinement versus initial transverse energy

250 V peak per model · 100 kHz · 1000 RF periods (10 ms) · aperture 8 mm

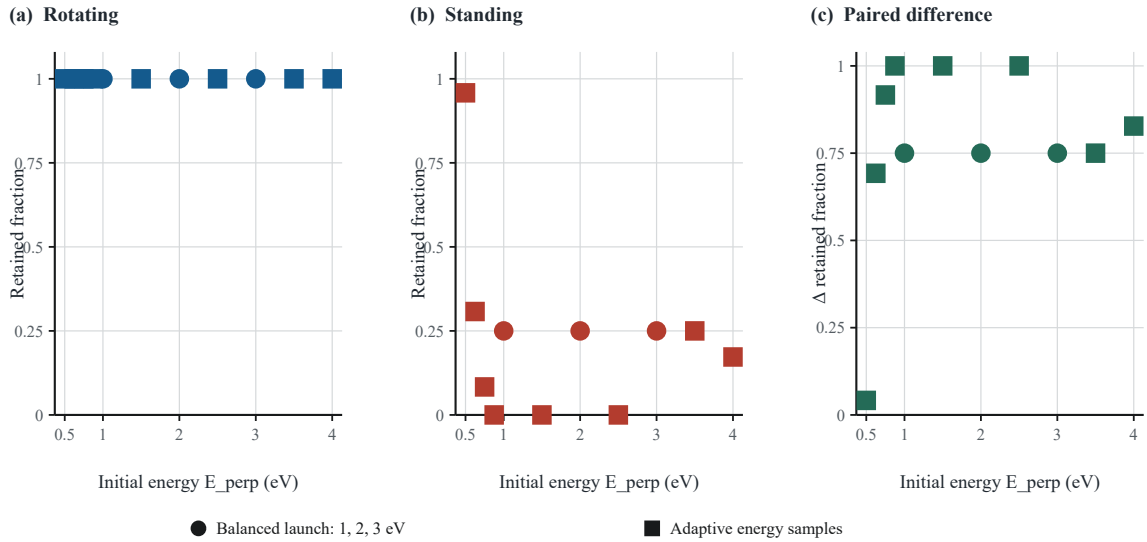

Markers are computed shells; no interpolation or smoothing. Fractions and counts describe the designed grid, not a population.

E0 (eV)	0.5	0.625	0.75	0.875	1	1.5	2	2.5	3	3.5	4
n matched	**48**	**13**	**48**	**3**	**64**	**48**	**64**	**48**	**64**	**64**	**58**