

Finite-time confinement vs. energy

250 V · 100 kHz · 1000 RF periods (10 ms)


(a) Rotating

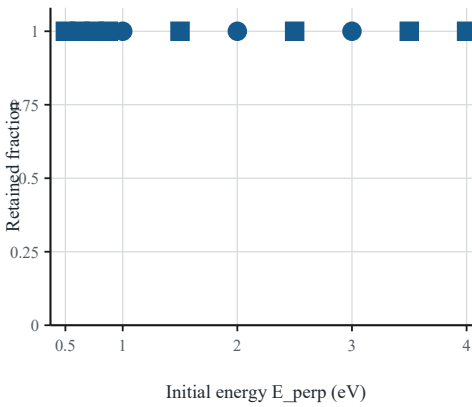

(b) Standing

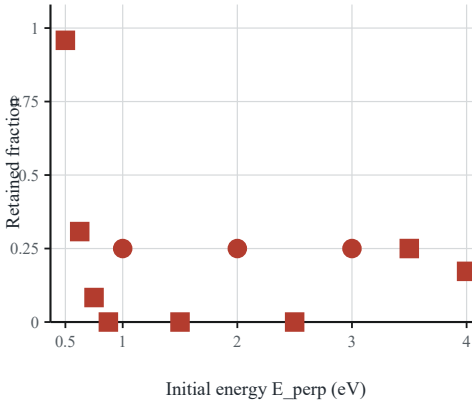

(c) Paired difference

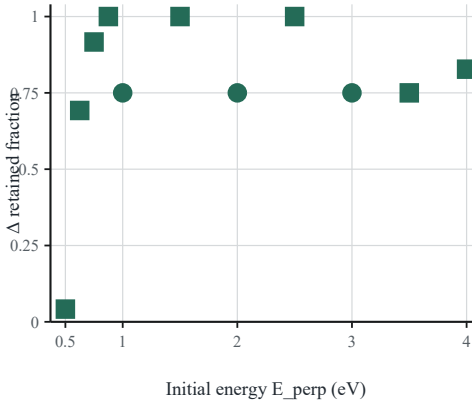

alanced launch: 1, 2, 3 eV

Adaptive energy samples

Markers are computed shells only; no interpolation. Designed-grid descriptor, not a population probability

E0 (eV)	n matched	0.5	0.625	0.75	0.875	1	1.5	2	2.5	3	3.5	4
		48	**13**	**48**	**3**	**64**	**48**	**64**	**48**	**64**	**64**	**58**