

Matched trajectory and radial motion


E_perp=1 eV · r0=1 mm · θ=45° · φ_RF=0° · + tangent · 250 V

(a) x–y trajectory (mm)

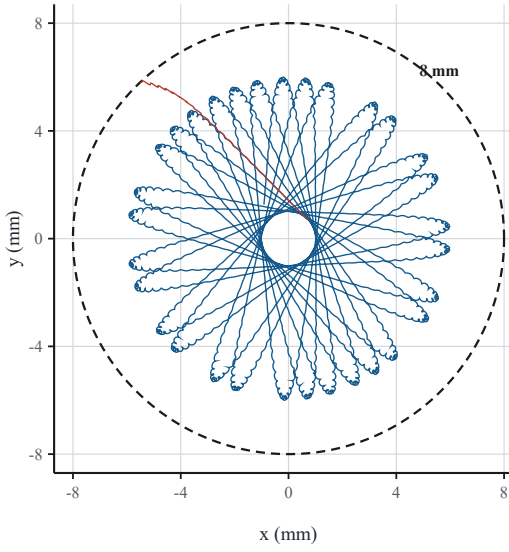

(b) Radius versus RF period

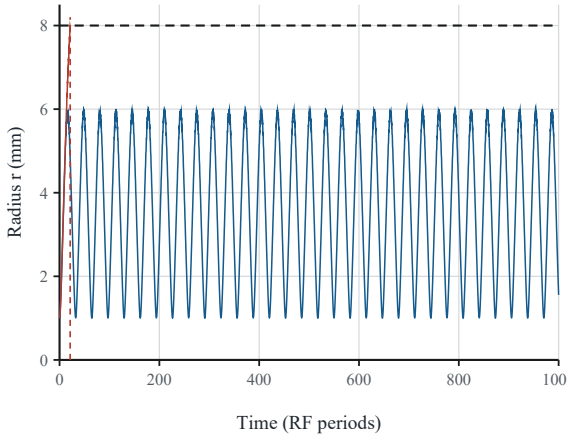

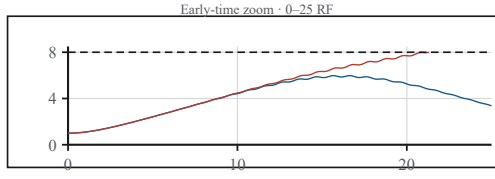

Rotating · retained to 1000 RF

Dashed ring: 8-mm aperture. Standing crossed at 21.31 RF; rotating is right-censored at 1000 RF.