
One matched launch separates the two trajectories

1 eV · r0=1 mm · azimuth 45° · RF phase 0° · + tangent · 250 V each

Aperture radius 8 mm is the circular boundary

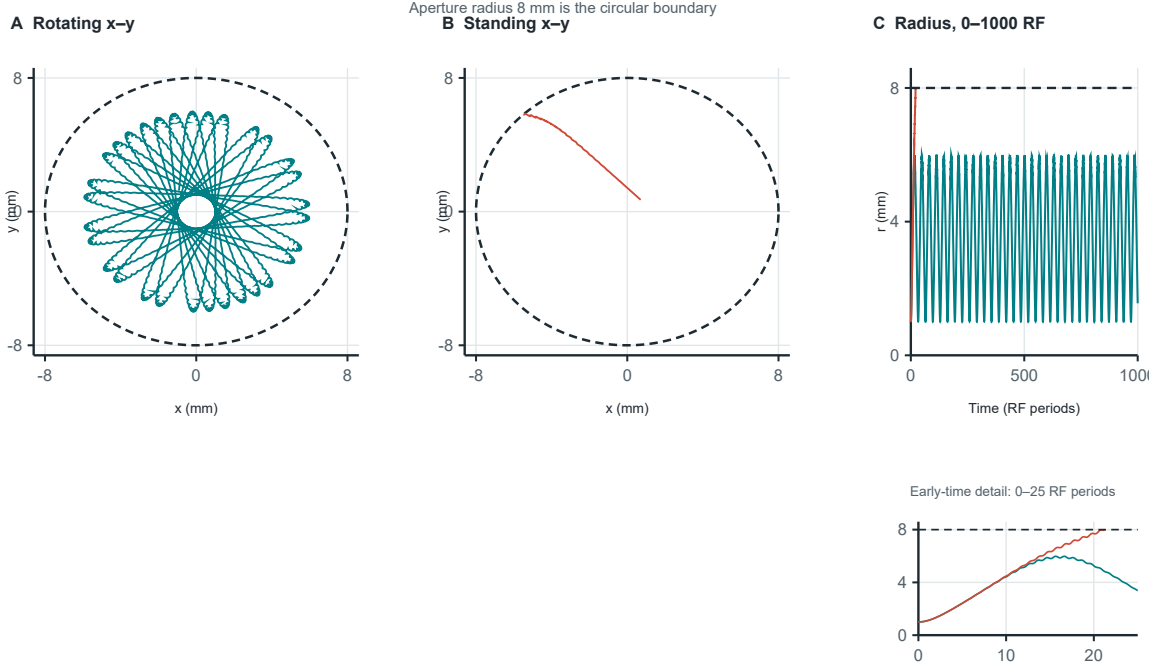

Each x–y panel uses the same scale; dashed circles mark the 8 mm aperture.