Validation of the effective-potential minimum

+10 µm radial displacement of electrode 0 · rotating field · search domain r ≤ 5 mm

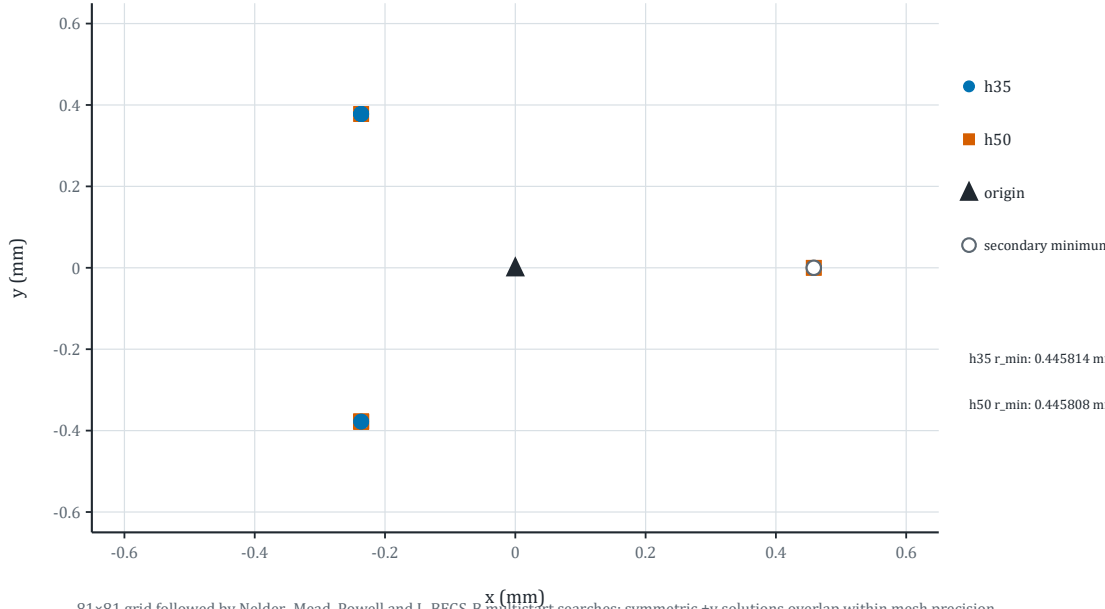

81×81 grid followed by Nelder–Mead, Powell and L-BFGS-B multistart searches; symmetric ±y solutions overlap within mesh precision.

Markers show optimizer endpoints only; the plotted points do not assert a continuous boundary or exact RF null.