


MTES DISENGAGING

INDUSTRIAL

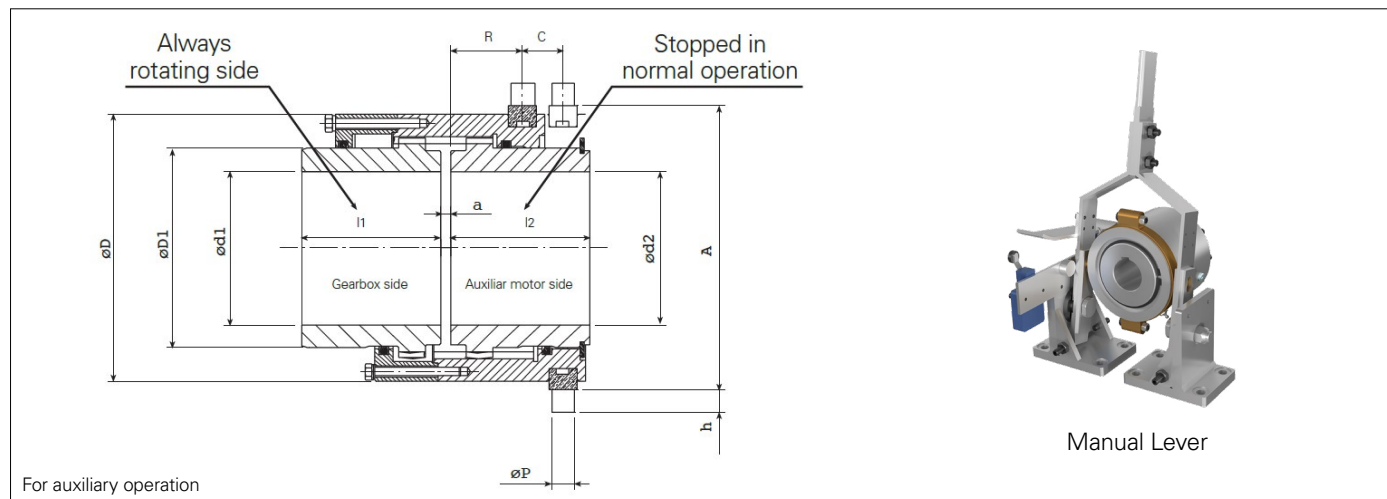

Designation example: **MTES-125 / n = 150 (rpm)**
Where "n" is the maximum speed

SIZE	TN NOMINAL (1)	TP MAX (1)	n MAX (8)	GENERAL DIMENSIONS (mm)										WEIGHT MAX. (5)	WEIGHT MIN. (6)	MOMENT OF INERTIA (5)	GREASE QTY. (7)
MTES	Nm	Nm	rpm	D	D1	d1-d2 (Min-Max) (2)(3)	I1-I2	a	A	h	P	R	C(4)	kg	kg	J (kgm ²)	kg
42	1200	2400	3000	100	60	13-44	55	6	104	12	12	24	18	6	5	0,008	0,059
55	2600	5200	2500	120	79	16-60	70	6	124	14	14	33	20	10	7	0,018	0,078
70	5000	10000	2000	150	101	20-75	80	6	154	16	16	40	25	18	13	0,051	0,17
90	8600	16000	1700	177	120	25-95	95	8	187	16	16	50	28	30	21	0,12	0,24
100	14000	28000	1500	200	143	30-105	105	8	210	18	18	56	32	43	30	0,21	0,31
125	20600	41200	1300	226	170	35-130	120	8	240	20	20	62	35	63	39	0,40	0,42
145	33000	66000	1150	264	200	45-150	135	10	280	20	20	70	40	98	64	0,83	0,59
165	45600	91200	1050	290	220	55-165	150	10	300	22	22	72	42	126	82	1,28	0,89
185	61400	122800	950	325	250	60-190	170	10	330	24	24	77	44	178	110	2,24	1,1
205	80800	161600	850	353	275	70-210	185	12	368	26	26	81	48	229	139	3,39	1,3
230	105500	211000	800	377	300	100-230	200	12	390	26	26	86	52	283	167	4,67	1,6
260	161000	322000	700	435	340	115-260	230	12	450	30	30	102	60	415	261	9,37	2,6

- From size 185 (included) the coupling is supplied by default with puller holes. If required, puller holes can also be made for smaller sizes.
- When engaging or disengaging the machine must be stopped and the shaft must be able to rotate freely.

- Pneumatic or hydraulic leveler can be integrated on demand.
- Setscrews can be included upon request.
- Adapted hub length available upon request.

- ATEX certifications are available. Please, contact Regal Rexnord Jaure product engineering to define the zone and category.



- The torque of the coupling does not include the connection transmission capacity.
- Minimum dimensions refer to already machined bore. For A00 rough bore dimensions contact Regal Rexnord Jaure product engineering.
- Max. allowable bore for couplings with DIN 6885/1 keys. For other types of keys or connections please contact Regal Rexnord Jaure product engineering.
- Stroke of the sleeve.

- Weight and moment of inertia are given for minimum bore.
- Weight is given for maximum bore.
- The amount of grease indicated in the catalogue is for guidance only. For exact amount please refer to coupling instructions.
- n MAX speed for balanced couplings. For higher speeds contact Regal Rexnord Jaure product engineering.