


MTFE WITH SIDE BRAKE DRUM

INDUSTRIAL

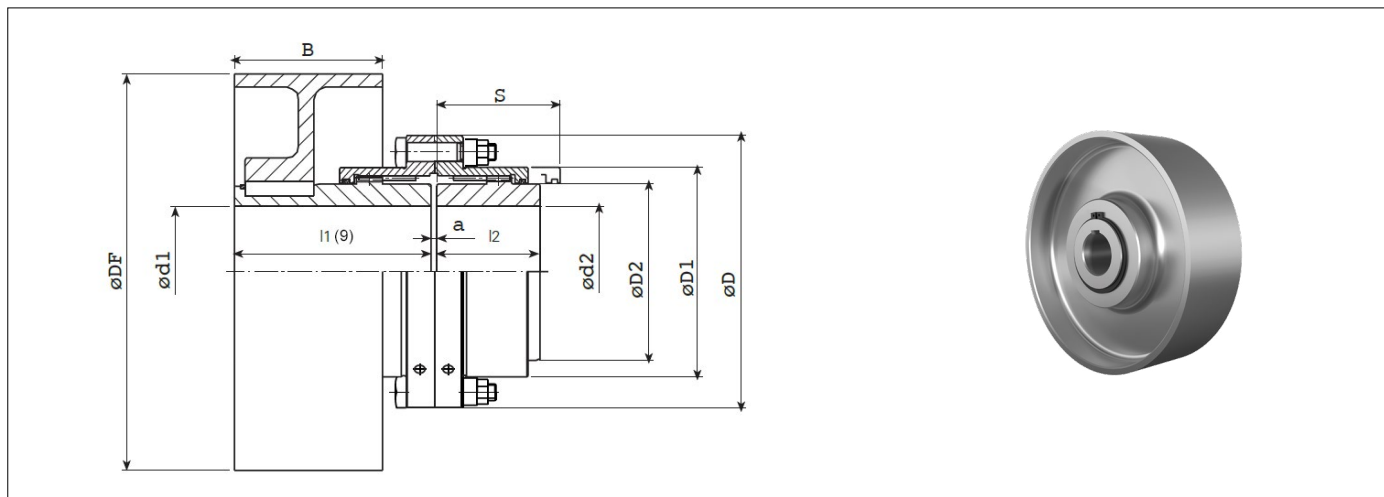

Designation example: **MTFE-132 / DF = 450 (mm) n = 1200 (rpm)**

Where "n" is the maximum speed

SIZE	TN NOMINAL (1)	TP MAX (1)	n MAX (8)(10)	GENERAL DIMENSIONS (mm)										WEIGHT MAX. (5)	WEIGHT MIN. (6)	MOMENT OF INERTIA (5)	GREASE QTY. (7)
MTFE	Nm	Nm	rpm	D	D1	D2	DF	B	d1-d2 (Min-Max) (2)(3)	l1 (9)	l2	a	S(4)	kg	J (kgm ²)	kg	kg
52	1780	3600	2850	111	82,5	69	200	75	14-52	105	43	3	57	11	8	0,040	0,030
62	2790	5520	2850 2300 1800	141	104,5	85	200 250 315	75 95 118	17-62	115 125 140	50	3 3 3	64	17 21 28	13 18 24	0,060 0,126 0,296	0,064
78	5600	11100	2300 1800 1650 1450	171	127,5	107	250 315 350 400	95 118 130 150	20-78	130 145 145 160	62	3 3 3 3	76	30 39 45 59	24 32 37 51	0,166 0,359 0,550 1,060	0,094
98	8500	17400	1800 1650 1450	210	156	133	315 350 400	118 130 150	26-98	155 155 170	76	5 5 5	92	55 61 76	42 49 63	0,460 0,670 1,190	0,14
112	14000	28200	1800 1650 1450 1300	234	181,5	152	315 350 400 450	118 130 150 170	30-112	155 155 170 180	90	5 5 5 5	108	66 71 88 107	48 54 69 88	0,54 0,74 1,28 2,12	0,29
132	23000	45600	1450 1300 1150	274	210,5	178	400 450 500	150 170 190	35-132	200 210 220	105	6 6 6	125	119 137 158	88 105 126	1,59 2,42 3,76	0,42
156	35100	69600	1150 1100 1000	312	248,5	209	500 530 630	190 195 236	70-156	220 220 250	120	6 6 6	140	181 192 239	144 151 195	4,16 4,90 9,16	0,60
174	44400	88000	1150 1100 1000 800	337	274	234	500 530 630 710	190 195 236 265	85-174	235 235 265 280	135	8 8 8 8	162	225 231 273 304	172 179 216 245	4,96 5,69 9,85 14,66	1,0

From size 174 (included) the coupling is supplied by default with puller holes. If required, puller holes can also be made for smaller sizes.

Anti-fall system version can be supplied on demand.
Setscrews can be included upon request.
Adapted hub length available upon request.

ATEX certifications are available.
Please, contact Regal Rexnord Jaure product engineering to define the zone and category.



(1) When calculating the nominal torque of the coupling neither the connection nor the braking system are considered.
For more details, please, contact Regal Rexnord Jaure product engineering.

(2) Minimum dimensions refer to already machined bore.
For A00 rough bore dimensions contact Regal Rexnord Jaure product engineering.

(3) Max. allowable bore for couplings with DIN 6885/1 keys.
For other types of keys or connections please contact Regal Rexnord Jaure product engineering.

(4) Clearance to align coupling hubs and replacement of sealing rings.

(5) Weight and moment of inertia are given for minimum bore.

(6) Weight is given for maximum bore.

(7) The amount of grease indicated in the catalogue is for guidance only.
For exact amount please refer to coupling instructions.

(8) When calculating the maximum allowed speed, we just consider the type of material of the brake drums EN-GJL-250. For other speed or materials, please, contact Regal Rexnord Jaure product engineering.

(9) l1 can be supplied with different length on demand.

(10) n MAX speed for balanced couplings. For higher speeds contact Regal Rexnord Jaure product engineering.