


MTG / MTG-HD BASIC DESIGN

INDUSTRIAL

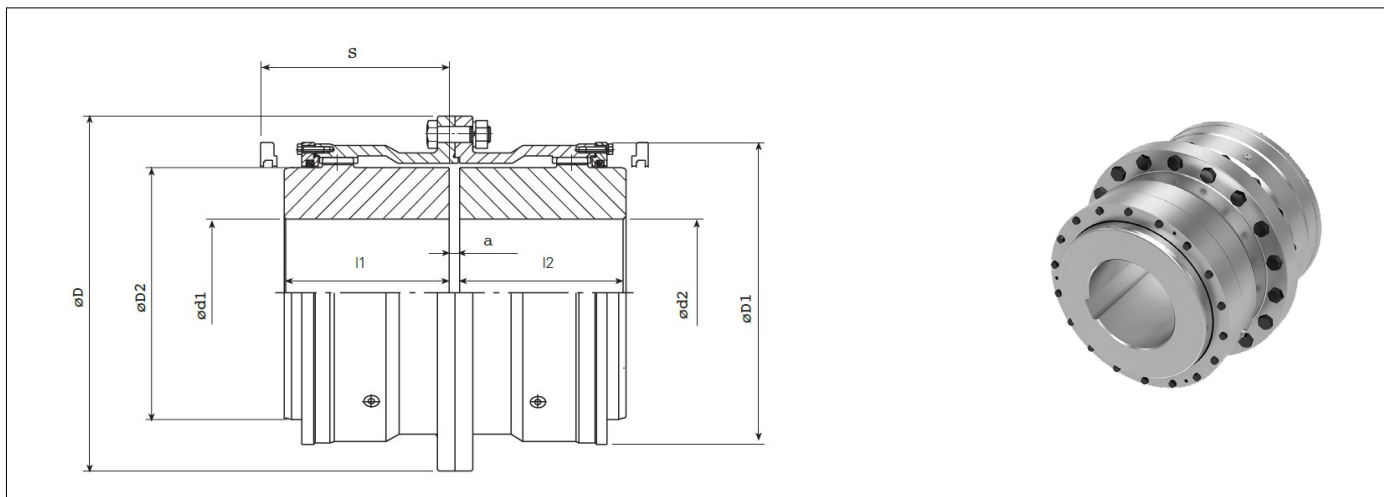

Designation example: **MTG-370**

SIZE	MTG		MTG-HD		n MAX (8)	GENERAL DIMENSIONS (mm)							WEIGHT MAX. (5)	WEIGHT MIN. (6)	MOMENT OF INERTIA (5)	GREASE QTY. (7)
	TN NOMINAL (1)	TP MAX (1)	TN NOMINAL (1)	TP MAX (1)		D	D1	D2	d1-d2 (min-max) (2)(3)	l1-l2	a	S(4)	kg	kg	J (kgm ²)	kg
MTG MTG-HD	Nm	Nm	Nm	Nm	rpm											
280	220000	440000	363000	726000	1800	540	465	370	140-280	250	16	300	527	346	14,95	4,0
310	250000	500000	412500	825000	1600	585	505	410	160-310	270	16	320	676	442	22,93	5,1
345	320000	640000	528000	1056000	1500	650	548	450	180-345	290	16	340	884	574	36,84	5,9
370	400000	800000	660000	1320000	1400	690	588	490	210-370	325	20	370	1105	733	53,16	7,2
390	510000	1020000	841500	1683000	1300	760	640	520	230-390	345	20	400	1379	957	79,63	10,7
420	660000	1320000	1089000	2178000	1200	805	690	560	250-420	365	20	420	1667	1154	110	12,0
460	780000	1560000	1287000	2574000	1100	850	730	600	275-460	400	20	450	2043	1372	153	13,8
500	1000000	2000000	1650000	3300000	1050	930	780	650	300-500	410	25	490	2452	1643	217	16,8
550	1200000	2400000	1980000	3960000	950	995	850	710	325-550	430	25	520	3035	1991	313	18,6
590	1600000	3200000	2640000	5280000	900	1055	910	760	350-590	470	25	550	3720	2413	434	28,3
620	1800000	3600000	2970000	5940000	850	1140	970	810	375-620	500	30	600	4648	3145	633	25,2
650	1900000	3800000	3135000	6270000	800	1190	1020	840	400-650	520	30	630	5152	3469	765	33,5
680	2100000	4200000	3465000	6930000	750	1250	1080	890	425-680	540	30	650	5954	4077	990	50,6
730	2600000	5200000	4290000	8580000	700	1300	1150	950	450-730	570	30	680	6956	4634	1277	54,3
800	3800000	7600000	6270000	12540000	660	1420	1270	1050	475-800	600	30	725	9036	5971	1980	72,9
900	5420000	10840000	8943000	17886000	590	1600	1430	1180	500-900	670	35	800	13330	8670	3663	91,9
1000	7250000	14500000	11962500	23925000	550	1740	1570	1320	525-1000	740	35	890	17975	11130	5766	113
1100	8650000	17300000	14272500	28545000	500	1880	1710	1450	550-1100	800	35	980	23150	13930	8683	135
1200	10750000	21500000	17737500	35475000	480	1990	1830	1580	575-1200	850	35	1030	28605	16680	12239	163

► The coupling is supplied by default with puller holes.
If required, puller holes can also be made for smaller sizes.

► Setscrews can be included upon request.
► Adapted hub length available upon request.

► ATEX certifications are available.
Please, contact Regal Rexnord Jaure product engineering to define the zone and category.



- (1) The torque of the coupling does not include the connection transmission capacity.
(2) Minimum dimensions refer to already machined bore. For A00 rough bore dimensions contact Regal Rexnord Jaure product engineering.
(3) Max. allowable bore for couplings with DIN 6885/1 keys. For other types of keys or connections please contact Regal Rexnord Jaure product engineering.

- (4) Clearance to align coupling hubs and replacement of sealing rings.
(5) Weight and moment of inertia are given for minimum bore.
(6) Weight is given for maximum bore.

- (7) The amount of grease indicated in the catalogue is for guidance only.
For exact amount please refer to coupling instructions.
(8) n MAX speed for balanced couplings. For higher speeds contact Regal Rexnord Jaure product engineering.