




TİP A

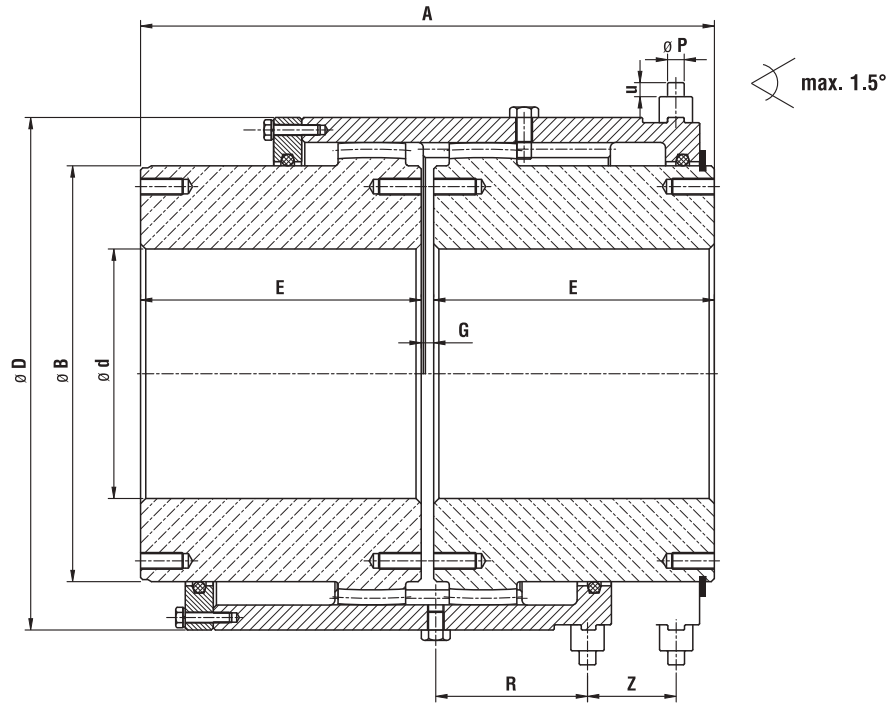

TİP A		A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12	A13	
 ød	max	mm	44	60	75	95	105	130	150	165	190	210	230	260	280
	min		13	16	20	25	30	35	45	55	60	70	100	115	140
	Tpeak	Nm	2050	4300	8400	14400	23400	34400	55000	76000	102400	134600	176000	269000	360000
	Tnominal	Nm	1025	2150	4200	7200	11700	17200	27500	38000	51200	67300	88000	134500	180000
		min ⁻¹	3000	2500	2000	1700	1500	1300	1150	1050	950	850	800	700	650
		°/grad	2x0.75	2x0.75	2x0.75	2x0.75	2x0.75	2x0.75	2x0.75	2x0.75	2x0.75	2x0.75	2x0.75	2x0.75	2x0.75
		mm±	0.38	0.45	0.55	0.65	0.75	1	1.1	1.2	1.3	1.5	1.6	1.7	2.1
		kg	5	7	13	21	30	39	64	82	110	140	167	260	320
		dm ³	0.05	0.07	0.13	0.21	0.36	0.52	0.80	0.98	1.51	2.02	2.43	3.29	6.44
		kgm ²	0.006	0.015	0.046	0.12	0.2	0.26	1.25	2	2.9	4.7	7.5	12.5	18.7
A		mm	116	146	166	198	218	248	280	310	350	382	412	472	516
B		mm	60	79	101	120	143	170	200	220	250	275	300	340	370
D		mm	102	122	152	180	203	229	267	293	330	358	382	440	475
E		mm	55	70	80	95	105	120	135	150	170	185	200	230	250
G		mm	6	6	6	8	8	8	10	10	10	12	12	12	16
H		mm	105	125	155	188	212	242	282	305	335	373	395	455	590
U		mm	12	14	16	16	18	20	20	22	24	26	26	30	30
V		mm	12	14	16	16	18	20	20	22	24	26	26	30	30
Y		mm	24	33	40	50	56	62	70	72	77	81	86	102	102
Z		mm	19	22	26	30	33	37	41	43	46	50	54	62	62

AISI 4140 DÖVME MALZEMEDEN İMAL EDİLEREK ISLAH EDİLMEKTEDİR (280-320HB). DİŞLİ KISIMLARI İNDÜKSİYONLA SERTLEŞTİRİLMEKTEDİR.
PRODUCTS HAVE BEEN MANUFACTURING FROM AISI 4140 MATERIAL AND QUENCHING+TEMPERING (280 320HB) TOOTH SURFACES HAVE BEEN HARDENING BY INDUCTION TEMPERING.