




TİP B1 (Brake 1)

max. 1.5°

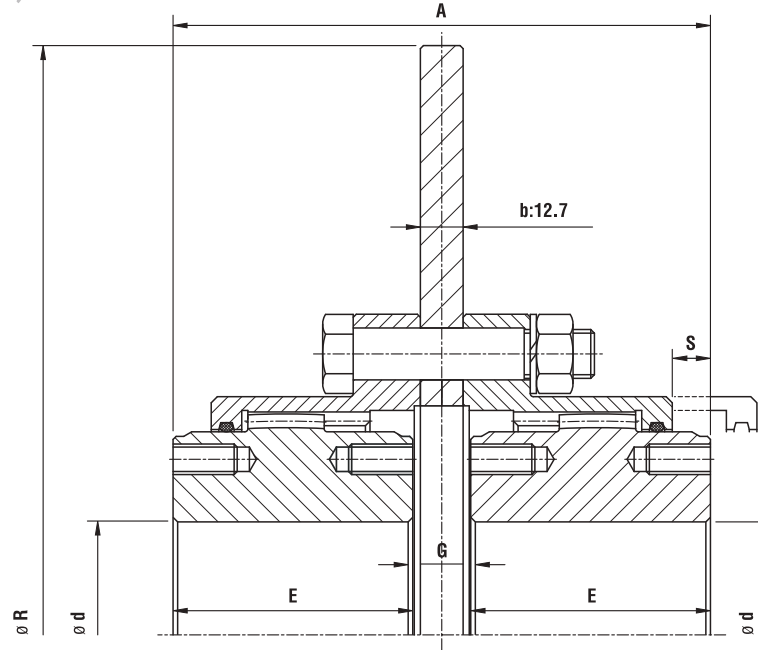

TİP B1			B1-1	B1-2	B1-3	B1-4	B1-5	B1-6	B1-7	B1-8
	ød	max	45	60	75	95	110	130	155	175
		min	0	0	0	0	0	55	65	80
	Nm	Tpeak	2700	5700	11000	21000	33000	45000	65000	93000
		Tnominal	1350	2850	5500	10500	16500	22500	32500	46500
	min ⁻¹		6500	6000	5200	4820	4200	4000	3800	3600
	°/grad		2x0.75	2x0.75	2x0.75	2x0.75	2x0.75	2x0.75	2x0.75	2x0.75
	mm±		0.38	0.45	0.55	0.65	0.75	1	1.1	1.2
	kg		9.5	13.5	27	42	58	90	120	155
			11.5	15.5	30	46	63	96	126	169
				18.5	34	51	69	110	140	
				20.5	39	57	75			
	dm ³		0.05	0.07	0.13	0.21	0.36	0.52	0.8	0.98
	kgm ²		0.006	0.015	0.046	0.12	0.2	0.26	1.25	2
A	mm		105	119	143	175	203	233	263	293
D	mm		111	141	171	210	234	274	312	337
E	mm		44.5	51.5	63.5	78.5	92.5	107	122	136
G	mm		16	16	16	18	18	19	19	21
R	mm		250	315	395	445	495	625	625	705
			315	355	445	495	550	705	705	795
				395	495	550	625	795	795	
				445	550	625	705			
S	mm		14	15	19	25	30	30	35	36

Kapline ait diğer ölçüler için bakınız Sayfa 10 - Tip Da / Please check Page 10 - Type Da to see other dimensions.

"B" Serisi Kaplinlerde "D" Serisi Dişli Kaplin Kullanılmaktadır. / Gear Coupling of the "B" Series is "D" Serie Coupling.

FREN DİSKLERİ GGG50 MALZEMEDEN İMAL EDİLEREK, DİNAMİK BALANSI ALINMAKTADIR.

AISI 4140 DÖVME MALZEMEDEN İMAL EDİLEREK ISLAH EDİLMEKTEDİR (280-320HB). DİŞLİ KISIMLARI İNDÜKSİYONLA SERTLEŞTİRİLMEKTEDİR.

BRAKE DISCS HAVE BEEN MANUFACTURING FROM GGG50 MATERIAL AND WILL BE BALANCED DYNAMICALLY.

PRODUCTS HAVE BEEN MANUFACTURING FROM AISI 4140 MATERIAL AND QUENCHING+TEMPERING (280-320HB). TOOTH SURFACES HAVE BEEN HARDENING BY INDUCTION HARDENING.