



TİP B2 (Brake 2)

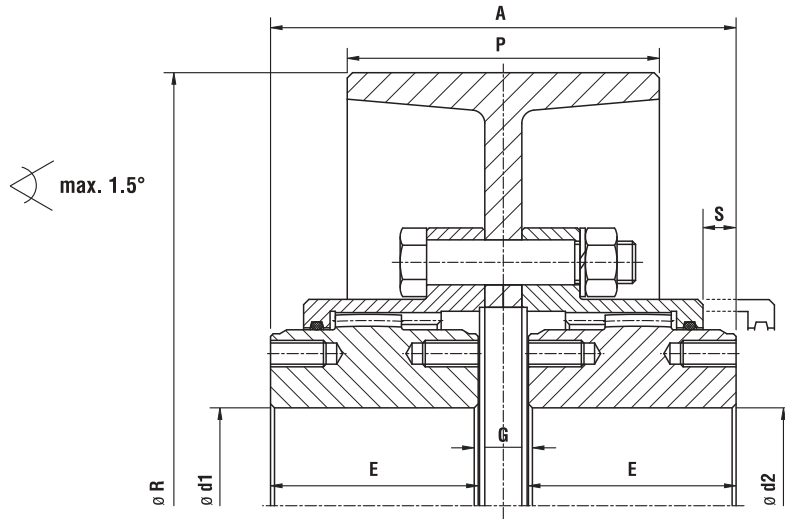

TİP B2			B2-1	B2-2	B2-3	B2-4	B2-5	B2-6	B2-7	B2-8
	Ød	max	45	60	75	95	110	130	155	175
		min	0	0	0	0	0	55	65	80
	Tpeak		Nm	2700	5700	11000	21000	33000	45000	65000
	Tnominal		Nm	1350	2850	5500	10500	16500	22500	32500
			min ⁻¹	6500	6000	5200	4820	4200	4000	3800
			kg	7.5 9.5	13.5 17.5 24.5	24 31 36 49	42 48 61	55 60 73 79 88	94 100 109	139 149 193
			mm	104 104	118 120 120	144 144 146 146	176 178 178	204 206 206 208 212	236 238 242	272 274 276
A			mm	104	120	146	178	208	242	308
D			mm	111	141	171	210	234	274	337
E			mm	44.5	51.5	63.5	78.5	92.5	107	136
G			mm	15 15	15 17 17	17 17 19 19	19 21 21	19 21 21 23 27	22 24 28	28 30 32
			mm	15	17	19	21	23	28	36
P			mm	60 75	75 95 118	95 118 130 150	118 130 150	118 130 150 170 190	150 170 190	190 195 236
			mm	60	75	95	118	130	150	190
R			mm	160 200	200 250 315	250 315 350 400	315 350 400	315 350 400 450 500	400 450 500	500 530 630
			mm	160	200	250	315	350	400	500
S			mm	14	15	19	25	30	30	35

Kapline ait diğer ölçüler için bakınız Sayfa 10 - Tip Da / Please check Page 10 - Type Da to see other dimensions.

"B" Serisi Kaplinlerde "D" Serisi Dişli Kaplin Kullanılmaktadır. / Gear Coupling of the "B" Series is "D" Serie Coupling.

FREN KASNAKLARI GGG50 MALZEMEDEN İMAL EDİLEREK, DİNAMİK BALANSI ALINMAKTADIR.

AISI 4140 DÖVME MALZEMEDEN İMAL EDİLEREK ISLAH EDİLMEKTEDİR (280-320HB). DIŞLI KISIMLARI İNDÜKSİYONLA SERTLEŞTİRİLMEKTEDİR.

BRAKE DRUMS HAVE BEEN MANUFACTURING FROM GGG50 MATERIAL AND WILL BE BALANCED DYNAMICALLY.

PRODUCTS HAVE BEEN MANUFACTURING FROM AISI 4140 MATERIAL AND QUENCHING+TEMPERING (280-320HB). TOOTH SURFACES HAVE BEEN HARDENING BY INDUCTION HARDENING.