


TİP B3 (Brake 3)

max. 1.5°

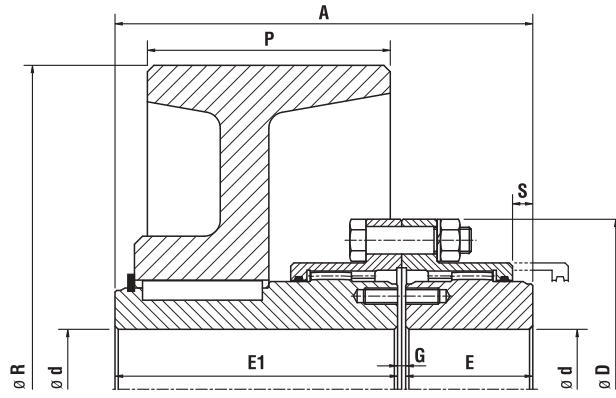

TİP B3			B3-1	B3-2	B3-3	B3-4	B3-5	B3-6	B3-7	B3-8
	Ød	max	45	60	75	95	110	130	155	175
		min	0	0	0	0	0	55	65	80
	Nm	Tpeak	2700	5700	11000	21000	33000	45000	65000	93000
		Tnominal	1350	2850	5500	10500	16500	22500	32500	46500
	min ⁻¹		6500	6000	5200	4820	4200	4000	3800	3600
	kg		9.5	13.5	28	47	69	105	180	209
			11.5	15.5	35	58	70	128	191	220
				21.5	46	72	84	150	248	277
				28.5	60		107			308
A	mm		147	160	196,5	238,5	266	320	358,5	386
			150	163	211,5	238,5	266	322	361	388,5
				172,5	211,5	256,5	284	332	381,5	409
				187,5	229,5		286			423,5
D	mm		111	141	171	210	234	274	312	337
E	mm		44.5	51.5	63.5	78.5	92.5	107	122	136
E1	mm		99,5	105,5	130	155	168,5	207	230,5	242
			102,5	108,5	145	155	168,5	209	233	244,5
				118	145	173	186,5	219	253,5	265
				133	163		188,5			279,5
G	mm		3	3	3	5	5	6	6	8
			3	3	3	5	5	6	6	8
				3	3	5	5	6	6	8
				3	3		5			8
P	mm		60	60	95	118	118	150	190	190
			75	75	118	130	130	170	195	195
				95	130	150	150	190	236	236
				118	150		170			265
R	mm		160	160	250	315	315	400	500	500
			200	200	315	350	350	450	530	530
				250	350	400	400	500	630	630
				315	400		450			710
S	mm		14	15	19	25	30	30	35	36
			42,5	42,5	63	79	79	97	110	110
			53	53	78	79	79	99	112,5	112,5
				62,5	78	97	97	109	133	133
				77,5	96		99			147,5

Kapline ait diğer ölçüler için bakınız Sayfa 10 - Tip Da / Please check Page 10 - Type Da to see other dimensions.

"B" Serisi Kaplinlerde "D" Serisi Dişli Kaplin Kullanılmaktadır. / Gear Coupling of the "B" Series is "D" Serie Coupling.

FREN DİSKLERİ GGG50 MALZEMEDEN İMAL EDİLEREK, DİNAMİK BALANSI ALINMAKTADIR.

AISI 4140 DÖVME MALZEMEDEN İMAL EDİLEREK ISLAH EDİLMEKTEDİR (280-320HB). DİŞLİ KISIMLARI İNDÜKSİYONLA SERTLEŞTİRİLMEKTEDİR.

BRAKE DISCS HAVE BEEN MANUFACTURING FROM GGG50 MATERIAL AND WILL BE BALANCED DYNAMICALLY.

PRODUCTS HAVE BEEN MANUFACTURING FROM AISI 4140 MATERIAL AND QUENCHING+TEMPERING (280-320HB). TOOTH SURFACES HAVE BEEN HARDENING BY INDUCTION HARDENING.