


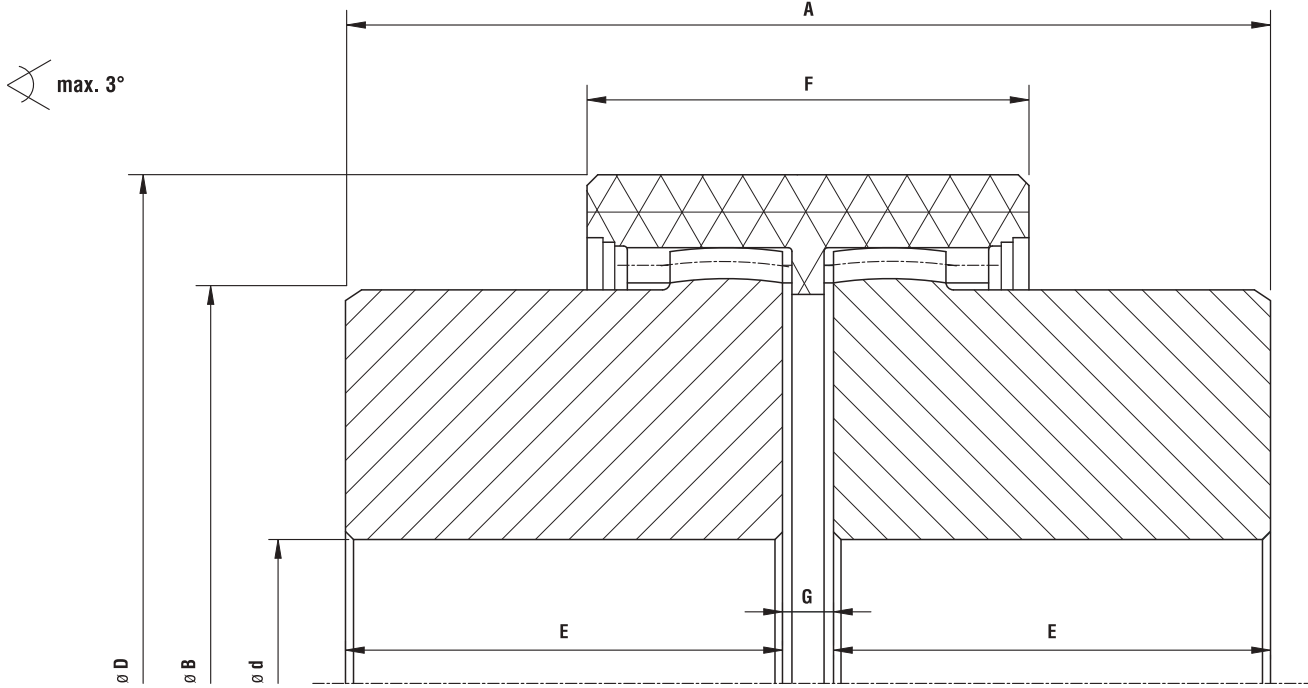

TİP C		C1	C2	C3	C4	C5	C6	C7	C8	C9	C10
ød max	mm	14	19	24	28	32	38	42	48	65	80
	TK Nominal	Nm	10	16	20	45	60	80	100	140	380
	TK Max.	Nm	20	32	40	90	120	160	200	280	760
Max. Hız.	min ⁻¹	14000	11800	10600	8500	7500	6700	6000	5600	4000	3150
	degree grad	3	3	3	3	3	3	3	3	3	3
A max.	mm	50	54	56	84	84	84	88	104	114	186
B	mm	25	32	36	44	50	58	65	68	96	124
D	mm	40	48	52	66	76	83	92	95	132	175
E	mm	23	25	26	40	40	40	42	45	55	90
F	mm	37	37	41	46	48	48	50	50	68	93
G	mm	2	2	2	2	2	2	2	2	2	2

FREN DİSKLERİ GGG50 MALZEMEDEN İMAL EDİLEREK, DİNAMİK BALANSI ALINMAKTADIR.

AIŞI 4140 DÖVME MALZEMEDEN İMAL EDİLEREK İSLAH EDİLMEKTEDİR (280-320HB). DIŞLI KISIMLARI İNDÜKSİYONLA SERTLEŞTİRİLMEKTEDİR.

BRAKE DISCS HAVE BEEN MANUFACTURING FROM GGG50 MATERIAL AND WILL BE BALANCED DYNAMICALLY.

PRODUCTS HAVE BEEN MANUFACTURING FROM AIŞI 4140 MATERIAL AND QUENCHING+TEMPERING (280-320HB). TOOTH SURFACES HAVE BEEN HARDENING BY INDUCTION HARDENING.

KAPLIN GÖBEKLERİ AIŞI 1040 DÖVME MALZEMEDEN, ZARFLARI CAST POLYAMİD MALZEMEDEN İMAL EDİLMEKTEDİR.

COUPLING HUBS HAVE BEEN MANUFACTURING FROM AIŞI 1040 MATERIAL, SLEEVES HAVE BEEN MANUFACTURING FROM CAST POLYAMID MATERIAL.