
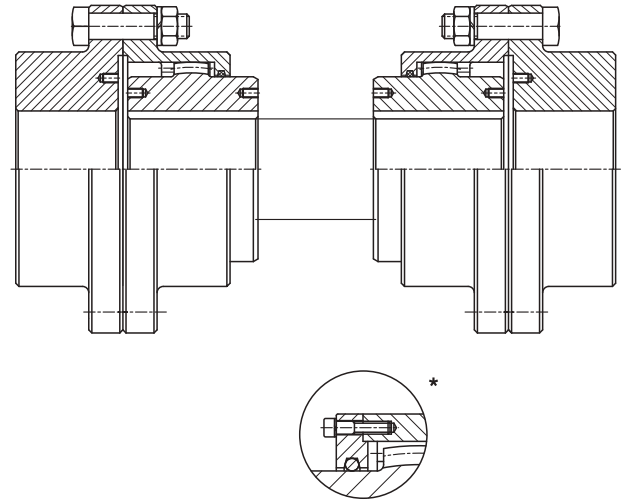


TİP Db

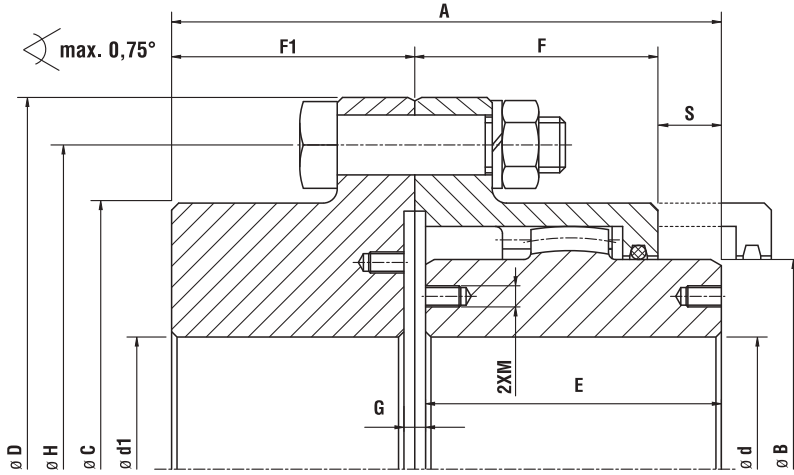

TİP Db			Db1	Db2	Db3	Db4	Db5	Db6	Db7	Db8	Db9	Db10	Db11	Db12	Db13	Db14
	Ød max	mm	45	60	75	95	110	130	155	175	195	215	240	275	280	320
	min		0	0	0	0	0	55	65	80	90	100	120	150	180	200
	Ød1 max	mm	55	75	95	110	130	155	180	200	230	250	280	330	360	400
	min		0	0	0	0	0	55	65	80	90	100	120	150	180	200
	Tpeak	Nm	2700	5700	11000	21000	33000	45000	65000	93000	127000	171000	234000	351000	490000	590000
	Tnominal	Nm	1350	2850	5500	10500	16500	22500	32500	46500	63500	85500	117000	175500	245000	295000
	%/grad		0.75	0.75	0.75	0.75	0.75	0.75	0.75	0.75	0.75	0.75	0.75	0.75	0.75	0.75
	kg		4.6	9	15.5	28	40	61	93	123	175	235	300	445	650	836
	dm³		0.023	0.037	0.065	0.104	0.181	0.261	0.398	0.488	0.756	1.009	1.215	1.643	3.2	3.8
	kgm²		0.006	0.015	0.046	0.12	0.2	0.26	1.25	2	2.9	4.7	7.5	12.5	18.7	29
A	mm		89.5	103.5	126.5	158.5	185.5	214.5	241.5	273	311	361	393	456	575.5	601.5
B	mm		67	87	107	133	155	179	214	235	267	290	320	376	387	436
C	mm		80	105	129.5	156	182	212	251	273	307	338	368	426	472	518
D	mm		111	141	171	210	234	274	312	337	380	405	444	506	591	640
E	mm		44.5	51.5	63.5	78.5	92.5	107	122	136	153	178	193	223	282.5	295
F	mm		41	47	58.5	68.5	82	98	108.5	121	132	151.5	165	183.5	225	234
F1	mm		43.5	50.5	61.5	77.5	90.5	104.5	116.5	133	154	179	196	228	288	300
G	mm		5	5	5	6	6	6.5	6.5	8	8	8	10	13	13	14.5
H	mm		96	122	150	184	208	242	280	305	345	368	406	460	530	580
M			M6	M6	M8	M10	M10	M12	M12	M12	M16	M16	M16	M20	M20	M20
S	mm		14	15	19	25	30	30	35	36	43	54	55	62	*	*

*Kapaklı Tip Dizayn Kullanılmaktadır.

Sleeves are Cover Design.

AISI 4140 DÖVME MALZEMEDEN İMAL EDİLEREK ISLAH EDİLMEKTEDİR (280-320HB). DİŞLİ KISIMLARI Db5 ve SONRASI İNDÜKSİYONLA SERTLEŞTİRİLMEKTEDİR. PRODUCTS HAVE BEEN MANUFACTURING FROM AISI 4140 MATERIAL AND QUENCHING+TEMPERING (280-320HB). TOOTH SURFACES HAVE BEEN HARDENING BY INDUCTION HARDENING AFTER Db5.