




TİP Dv

Dik Kaplin

Vertical Coupling

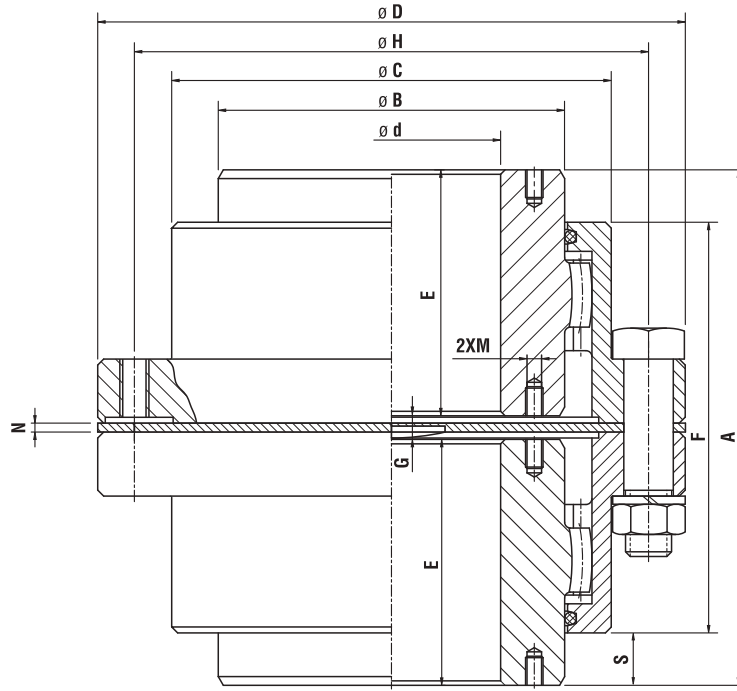

max. 1,5°

TİP Dv		Dv1	Dv2	Dv3	Dv4	Dv5	Dv6	Dv7	Dv8	Dv9	Dv10	Dv11	Dv12	Dv13	Dv14	Dv15	Dv16	Dv17	Dv18	Dv19	Dv20
 max ød min	mm	45	60	75	95	110	130	155	175	195	215	240	275	280	320	360	400	450	500	530	560
		0	0	0	0	0	55	65	80	90	100	120	150	180	200	220	260	280	300	330	350
 Tpeak Nm Tnominal	Nm	2700	5700	11000	21000	33000	45000	65000	93000	127000	171000	234000	351000	490000	590000	750000	920000	1200000	1300000	1600000	1800000
	Nm	1350	2850	5500	10500	16500	22500	32500	46500	63500	85500	117000	175500	245000	295000	375000	460000	600000	650000	800000	900000
	min ⁻¹	6500	6000	5200	4820	4200	4000	3800	3600	3450	3300	3050	2750	1700	1600	1400	1500	1300	1100	1000	900
	%grad	2x0.75	2x0.75	2x0.75	2x0.75	2x0.75	2x0.75	2x0.75	2x0.75	2x0.75	2x0.75	2x0.75	2x0.75	2x0.75	2x0.75	2x0.75	2x0.75	2x0.75	2x0.75	2x0.75	2x0.75
	mm±	0.38	0.45	0.55	0.65	0.75	1	1.1	1.2	1.3	1.5	1.6	1.7	2.1	2.2	2.4	2.6	2.8	2.9	3.2	3.3
	kg	4.5	8.5	15	27	39	60	90	119	170	225	280	430	600	770	1000	1250	1600	2000	2400	2900
	dm ³	0.05	0.07	0.13	0.21	0.36	0.52	0.8	0.98	1.51	2.02	2.43	3.29	6.44	7.6	12	13	17	19	24	26
	kgm ²	0.006	0.015	0.046	0.12	0.2	0.26	1.25	2	2.9	4.7	7.5	12.5	18.7	29	42	56	115	165	240	325
A	mm	95	109	133	165	193	225	255	285	319	370	400	462	581	610	634	687	728	778	833	878
B	mm	67	87	107	133	155	179	214	235	267	290	320	376	387	436	486	540	606	635	680	730
C	mm	80	105	129.5	156	182	212	251	273	307	338	368	426	472	518	562	620	682	733	787	841
D	mm	111	141	171	210	234	274	312	337	380	405	444	506	591	640	684	742	804	908	965	1029
E	mm	44.5	51.5	63.5	78.5	92.5	107	122	136	153	178	193	223	282.5	295	307	333.5	353.5	375.5	403	425.5
F	mm	82	94	117	137	164	196	217	242	264	303	330	367	450	468	502	538	566	602	636	666
G	mm	6	6	6	8	8	11	11	13	13	14	14	16	16	20	20	20	20	27	27	27
H	mm	96	122	150	184	208	242	280	305	345	368	406	460	530	580	624	682	744			
M		M6	M6	M8	M10	M10	M12	M12	M12	M16	M16	M16	M20	M20	M20	M24	M24	M24	M42	M42	M42
N	mm	3	3	3	3	3	5	5	5	5	6	6	6	6	7	7	7	7	8	8	8
S	mm	14	15	19	25	30	30	35	36	43	54	55	62								

AISI 4140 DÖVME MALZEMEDEN İMAL EDİLEREK ISLAH EDİLMEKTEDİR (280-320HB). DİŞLİ KISIMLARI Dv5 ve SONRASI İNDÜKSİYONLA SERTLEŞTİRİLMEKTEDİR.
PRODUCTS HAVE BEEN MANUFACTURING FROM AISI 4140 MATERIAL AND QUENCHING+TEMPERING (280-320HB). TOOTH SURFACES HAVE BEEN HARDENING BY INDUCTION HARDENING AFTER Dv5.