




TİP E

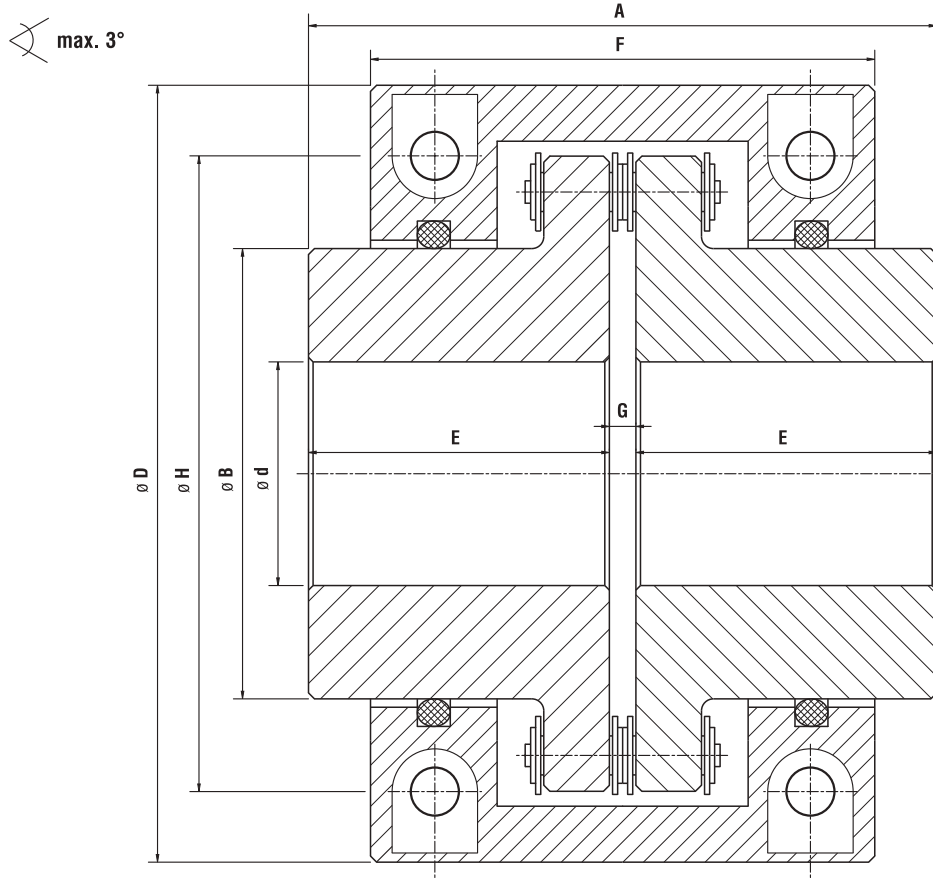

TİP E		E1	E2	E3	E4	E5	E6
max ød min	mm	27	38	48	60	80	100
		12	12	15	20	25	28
Devir/Revolution	min ⁻¹	4000	4000	4000	3000	2000	1800
Max. Power	HP@1000d/dak	12	25	41	72	181	329
A	mm	61.3	71.3	85.4	133.5	141.4	189.8
B	mm	42	56	70	88	114	143
D	mm	78	100	122	144	188	236
E	mm	28	32	38.5	62	62	85
F	mm	60	70	84	132	140	188
G	mm	5.3	7.3	8.4	9.5	17.4	19.8
H	mm	62	78	96	116	160	204

KAPLİN ZARFLARI AISİ 12 MALZEMEDEN, ZİNCİR DİŞLİLERİ AISİ 1040 MALZEMEDEN İMAL EDİLEREK DİŞLİ KISIMLARI İNDÜKSİYONLA SERTLEŞTİRİLMEKTEDİR (48-52 HRC).

SLEEVs HAVE BEEN MANUFACTURING FROM AISI 12 MATERIAL, CHAIN GEARS HAVE BEEN MANUFACTURING FROM AISI 1040 MATERIAL AND TOOTH SURFACES HAVE BEEN HARDENING BY INDUCTION HARDENING (48-52 HRC).