

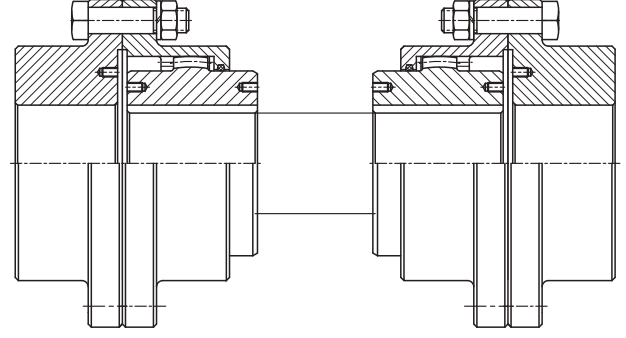


TİP G

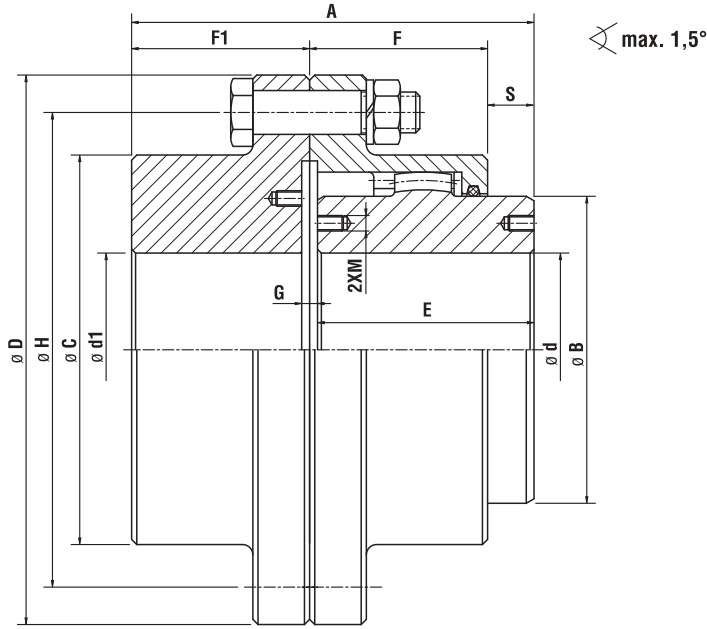

TİP G		G1	G2	G3	G4	G5	G6	G7	G8	G9	G10	G11	G12	G13	G14
 max	mm	40	55	70	85	100	120	140	160	180	200	220	250	280	320
 min	mm	0	0	25	35	45	55	65	80	90	100	120	150	180	200
 max	mm	55	70	90	110	130	150	170	200	220	250	275	300	360	400
 min	mm	0	0	25	35	45	65	75	90	90	100	120	150	180	200
 Tpeak	Nm	1800	3300	5800	10900	16600	25300	41000	56200	78200	117000	223000	284000	490000	550000
 Tnominal	Nm	900	1650	2900	5450	8300	12650	20500	28100	39100	58500	111500	142000	245000	275000
 %/grad		1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
 kg		4.4	8.7	14.3	25.5	37	59	89	115	170	230	280	400	655	835
 dm ³		0.025	0.032	0.062	0.117	0.17	0.23	0.45	0.61	0.82	1.2	1.3	1.9	3.2	3.8
 kgm ²		0.005	0.02	0.042	0.106	0.395	0.435	0.82	1.3	2.5	3.9	5.38	10.5	22.65	34.6
A	mm	89.5	103.5	126.5	158.5	185.5	214.5	241.5	273	311	361	393	456	575.5	601.5
B	mm	60	77	97	119	144	166	190	217	242	270	295	335	396	434
C	mm	77	97	123	151	175	201	235	263	294	324	355	404	472	518
D	mm	117	152	178	213	240	280	318	347	390	425.5	457	527	591	640
E	mm	44.5	51.5	63.5	78.5	92.5	107	122	136	153	178	193	223	282.5	295
F	mm	42	48	59	69	82	98	107	120	131	151	170	195	225	234
F1	mm	43.5	50.5	61.5	77.5	90.5	104.5	116.5	133	154	179	196	228	288	300
G	mm	5	5	5	6	6	6.5	6.5	8	8	8	10	13	13	14
H	mm	96	122	150	184	208	242	280	305	345	368	406	460	530	580
M		M6	M6	M8	M10	M10	M12	M12	M12	M16	M16	M16	M20	M20	M20
S	mm	16	19	20	25	28	33	40	41	49	49	50	66	*	*

*Kapaklı Tip Dizayn Kullanılmaktadır.

Sleeves are Cover Design.

AIISI 1040 DÖVME MALZEMEDEN İMAL EDİLEREK DİŞLİ KISIMLARI G5 ve SONRASI İNDÜKSİYONLA SERTLEŞTİRİLMEKTEDİR.

PRODUCTS HAVE BEEN MANUFACTURING FROM AISI 1040 MATERIAL AND TOOTH SURFACES HAVE BEEN HARDENING BY INDUCTION HARDENING AFTER G5.