
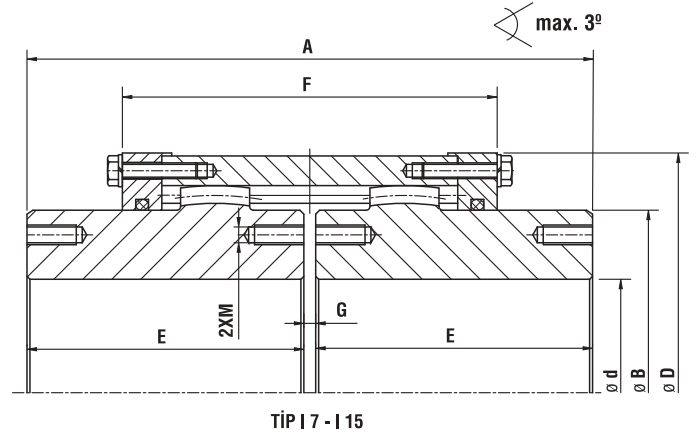


TİP I

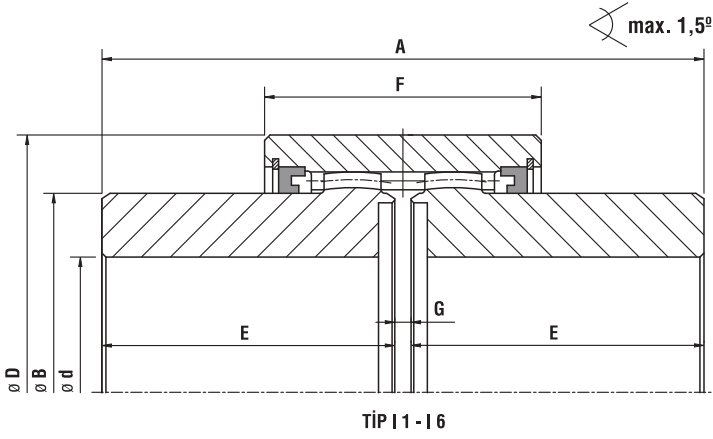

TİP I		I 1	I 2	I 3	I 4	I 5	I 6	I 7	I 8	I 9	I 10	I 11	I 12	I 13	I 14	I 15
 max ød min	mm	32	42	57	70	85	100	120	140	160	180	200	220	250	280	320
		0	0	22	25	38	38	55	65	80	90	100	120	150	180	200
 Nm Tpeak	Nm	1200	2300	4000	6550	11350	17100	25350	41000	56500	78500	117000	223000	284000	489000	581000
	Nm	600	11500	2000	3275	5675	8550	12675	20500	28250	39250	58500	111500	142000	244500	285000
	min ⁻¹	7650	7100	6100	5500	5000	4700	4500	4100	3850	3650	3450	3300	3100	2850	2700
	%/grad	2x0.75	2x0.75	2x0.75	2x0.75	2x0.75	2x0.75	2x1.5	2x1.5	2x1.5	2x0.75	2x0.75	2x0.75	2x0.75	2x0.75	2x0.75
	mm±	0.09	0.13	0.13	0.18	0.21	0.21	1.1	1.3	1.7	1.6	1	1.1	1.3	1.8	1.9
	kg	2	3.5	6	9.2	15.5	30	38	65	95	127	183	225	320	540	690
	dm ³	0.022	0.036	0.063	0.114	0.201	0.27	0.31	0.62	0.9	1.1	1.5	1.55	2.6	5.6	6.8
	kgm ²	0.02	0.005	0.01	0.025	0.055	0.125	0.25	0.45	0.89	1.45	2.52	3.75	6.85	16.1	24.9
A	mm	80	95	110	120	140	222	216	246	278	308	358	388	450	570	597
B	mm	50.9	60.4	82.6	100	121	143	165	190	216	242	270	295	335	394	432
D	mm	84	95	120	140	168	190	210	243	278	305	340	364	404	472	518
E	mm	38.5	46	53.5	57	67	108	105	120	135	150	175	190	220	280	292
F	mm	50	65	68	80	95	102	173	190	214	230	256	280	323	410	428
G	mm	3	3	3	6	6	6	6	6	8	8	8	8	10	10	13
M	mm						M10	M10	M10	M12	M16	M16	M16	M20	M20	M20

AISI 4140 DÖVME MALZEMEDEN İMAL EDİLEREK ISLAH EDİLMEKTEDİR (280-320HB). DİŞLİ KISIMLARI I 5 ve SONRASI İNDÜKSİYONLA SERTLEŞTİRİLMEKTEDİR.
PRODUCTS HAVE BEEN MANUFACTURING FROM AISI 4140 MATERIAL AND QUENCHING+TEMPERING (280-320HB), TOOTH SURFACES HAVE BEEN HARDENING BY INDUCTION HARDENING AFTER I5.