



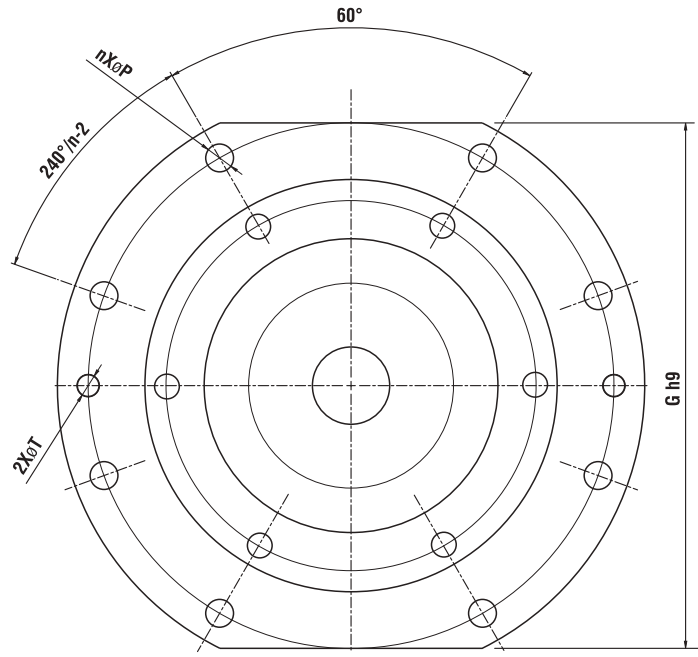

TİP J

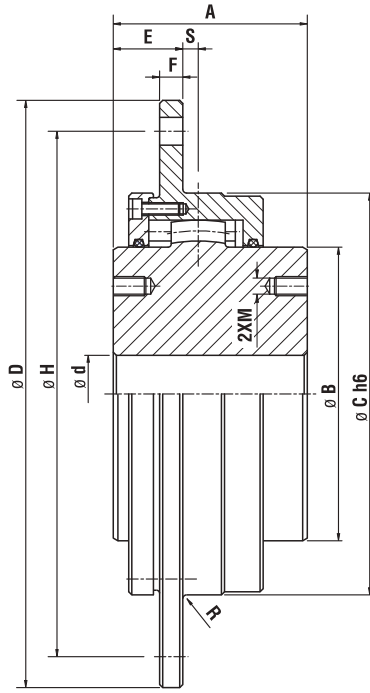

max. 0.75°

TİP J		J1	J2	J3	J4	J5	J6	J7	J8	J9	J10	J11	J12	J13	J14	
	ød max	mm	50	65	90	100	110	130	150	170	200	220	250	280	300	320
	min		19	25	35	45	55	55	65	70	100	120	150	180	180	200
	Tpeak	Nm	7200	9600	17200	28800	36800	45200	74000	124000	162000	260000	320000	620000	770000	1000000
	Tnominal	Nm	3600	4800	8600	14400	18400	22600	37000	62000	81000	130000	160000	310000	385000	500000
Radial Load		N	12400	16400	29200	38400	47000	59400	88000	112000	152000	188000	221000	314000	343000	399000
	%/grad		0.75	0.75	0.75	0.75	0.75	0.75	0.75	0.5	0.5	0.5	0.5	0.5	0.5	0.5
	kg		12	15	25	36	43	55	73	110	175	205	240	380	450	575
	dm³		0.07	0.07	0.1	0.15	0.17	0.21	0.23	0.44	0.53	0.6	0.66	1	1.2	2
	kgm²		0.045	0.065	0.15	0.3	0.4	0.65	0.8	1.7	3.52	4.9	6.5	13.7	17.8	18.5
A	mm		90	100	100	125	130	145	170	185	220	240	260	315	320	350
B	mm		75	95	135	150	170	190	210	240	290	320	360	410	440	470
C	mm		140	160	200	220	240	260	280	340	400	420	450	530	560	600
D	mm		230	250	290	340	360	380	400	450	510	550	580	650	680	710
E	mm		42	42	42	45	45	45	45	60	60	60	60	65	65	81
F	mm		12	12	12	15	15	15	15	20	20	20	20	25	25	25
G	mm		200	220	260	300	320	340	360	400	460	500	530	580	600	640
H	mm		200	220	260	300	320	340	360	400	460	500	530	600	630	660
S	mm		6	6	6	10	10	10	15	15	25	25	33.5	30	30	52
n	qty		6	6	6	6	6	6	6	6	6	6	8	8	10	10
P	mm		14	14	14	18	18	18	18	23	23	23	23	23	23	23
R	mm		2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	4	4	4	4
T			M12	M12	M12	M16	M16	M16	M16	M20	M20	M20	M20	M20	M20	M20
M			M8	M8	M10	M12	M16	M16	M16	M16	M20	M20	M20	M20	M20	M20

AIŞI 4140 DÖVME MALZEMEDEN İMAL EDİLEREK İSLAH EDİLMEKTEDİR (280-320HB). DİŞLİ KISIMLARI İNDÜKSİYONLA SERTLEŞTİRİLMEKTEDİR.

PRODUCTS HAVE BEEN MANUFACTURING FROM AISI 4140 MATERIAL AND QUENCHING+TEMPERING (280-320HB). TOOTH SURFACES HAVE BEEN HARDENING BY INDUCTION HARDENING.