



TİP N

max. 1.5°

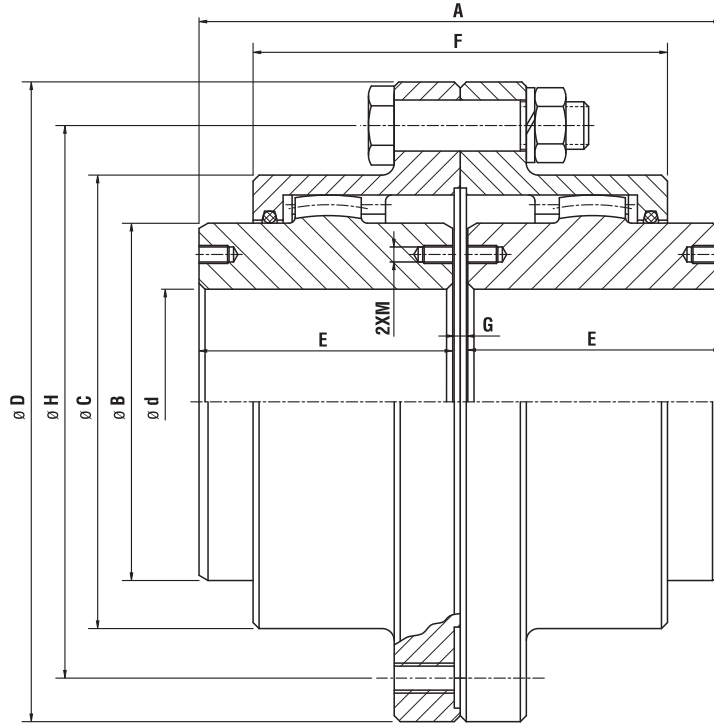

TİP N		N1	N2	N3	N4	N5	N6	N7	N8	N9	N10	N11	N12	N13	N14
 ød max	mm	325	370	400	430	475	510	530	580	610	680	780	860	950	1020
 Tpeak	Nm	556000	770000	990000	1330000	1690000	1999000	2400000	3120000	3640000	5040000	7100000	9000000	11960000	14500000
 Tnominal	Nm	278000	385000	495000	665000	845000	995000	1200000	1560000	1820000	2520000	3550000	4500000	5980000	7250000
 min⁻¹		1150	1020	930	815	725	680	645	550	535	480	420	365	330	310
 %grad		2x0.75	2x0.75	2x0.75	2x0.75	2x0.75	2x0.75	2x0.75	2x0.75	2x0.75	2x0.75	2x0.75	2x0.75	2x0.75	2x0.75
 kg		700	930	1250	1624	2102	2519	3024	3786	4572	6090	8735	11269	14880	18395
 dm³		6	7	9	11	13	20	23	27	41	52	65	92	113	130
 kgm²		20790	33712	53685	84215	129952	177980	238214	359321	484725	778120	1446254	2196254	3534580	4898125
A	mm	512	562	622	672	722	780	840	880	950	1050	1150	1260	1360	1460
B	mm	400	450	490	550	610	650	680	750	790	870	1000	1100	1220	1310
C	mm	493	543	587	647	712	753	803	878	928	1028	1163	1263	1398	1498
D	mm	580	630	700	760	825	885	935	1010	1085	1185	1340	1440	1575	1705
E	mm	250	275	305	330	355	380	410	430	460	510	560	610	660	710
F	mm	442	490	524	560	584	630	654	692	770	828	920	1014	1136	1204
G	mm	12	12	12	12	12	20	20	20	30	30	30	40	40	40
H	mm	540	590	645	705	770	820	870	945	1010	1110	1255	1355	1490	1605
M		M24	M24	M30	M30	M30	M36	M36	M36	M42	M42	M48	M48	M48	M56

*Kapaklı Tip Dizayn Kullanılmaktadır.

*Sleeves are Cover Design.

AISI 4140 DÖVME MALZEMEDEN İMAL EDİLEREK ISLAH EDİLMEKTEDİR (280-320HB). DİŞLİ KISIMLARI N5 ve SONRASI İNDÜKSİYONLA SERTLEŞTİRİLMEKTEDİR.
 PRODUCTS HAVE BEEN MANUFACTURING FROM AISI 4140 MATERIAL AND QUENCHING+TEMPERING (280-320HB), TOOTH SURFACES HAVE BEEN HARDENING BY INDUCTION HARDENING AFTER N5.