


TİP R

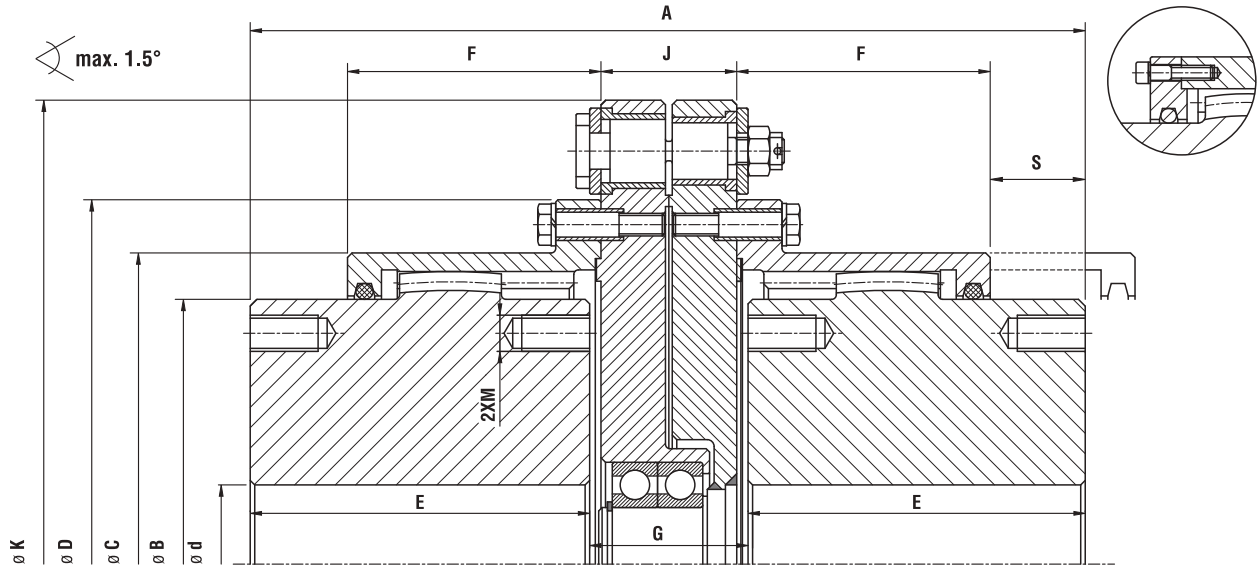

TİP R		R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14
 Ød	max	40	55	70	85	100	120	140	160	180	200	220	250	280	320
	min	0	0	25	35	45	55	65	80	90	100	120	150	180	200
 Tpeak	Nm	1800	3300	5800	10900	16600	25300	41000	56200	78200	117000	223000	284000	490000	550000
	Tnominal	Nm	900	1650	2900	5450	8300	12650	20500	28100	39100	58500	111500	142000	245000
	min ⁻¹	3900	3500	3250	2900	2500	2100	1950	1750	1600	1400	1350	1300	1200	1150
	°/grad	2x0.75	2x0.75	2x0.75	2x0.75	2x0.75	2x0.75	2x0.75	2x0.75	2x0.75	2x0.5	2x0.5	2x0.5	2x0.5	2x0.5
	mm±	0.65	0.75	0.85	0.95	1.1	1.25	1.35	1.45	1.55	1.35	1.45	1.55	1.75	1.85
	kg	9	18	27	45	61	100	135	175	240	312	385	555	825	1090
	dm ³	2x0.025	2x0.32	2x0.65	2x0.115	2x0.18	2x0.25	2x0.45	2x0.62	2x0.85	2x1.25	2x1.35	2x1.95	2x3.33	2x3.8
	kgm ²	0.02	0.06	0.11	0.29	0.51	1.12	1.78	2.75	4.55	6.85	9.5	17.5	32	55
A	mm	134	156	188	222	252	297	328	365	402	473	510	585	691	719
B	mm	60	77	97	119	144	166	190	217	242	270	295	335	396	434
C	mm	77	97	123	151	175	201	235	263	294	324	355	404	472	518
D	mm	117	152	178	213	240	280	318	347	390	425.5	457	527	591	640
E	mm	44.5	51.5	63.5	78.5	92.5	107	122	136	153	178	193	223	282.5	295
F	mm	42	48	59	69	82	98	107	120	131	151	170	195	225	234
G	mm	45	53	61	65	67	83	84	93	96	117	124	139	126	129
H	mm	96	122	150	184	208	242	280	305	345	368	406	460	530	580
J	mm	35	45	45	50	50	62	62	65	65	80	80	100	100	100
K	mm	155	194	228	267	300	358	384	428	470	524	560	656	720	789
M		M6	M6	M8	M10	M10	M12	M12	M12	M16	M16	M16	M20	M20	M20
S	mm	16	19	20	25	28	33	40	41	49	49	50	66	*	*

* Kapaklı Tip Dizayn Kullanılmaktadır. / * Sleeves are Cover Design.

TORK DEĞERİNE GÖRE PİM ÇAPI ve SAYISI BELİRLENİR, SİSTEM AŞIRI YÜKLENDİĞİNDE PİMLER KESEREK SİSTEMİ BOŞA ÇIKARIR.

PIN DIAMETER AND PIN QUANTITY DEFINES ACCORDING TO TORK INCASE OF OVERLOAD, SYSTEM CUTS THE PINS AND THE COUPLING FIZZLES OUT.

AIŞI 1040 DÖVME MALZEMEDEN İMAL EDİLEREK DİŞLİ KISIMLARI R5 ve SONRASI İNDÜKSİYONLA SERTLEŞTİRİLMEKTEDİR.

PRODUCTS HAVE BEEN MANUFACTURING FROM AISI 1040 MATERIAL AND TOOTH SURFACES HAVE BEEN HARDENING BY INDUCTION HARDENING AFTER R5.