





TİP S8 1-17

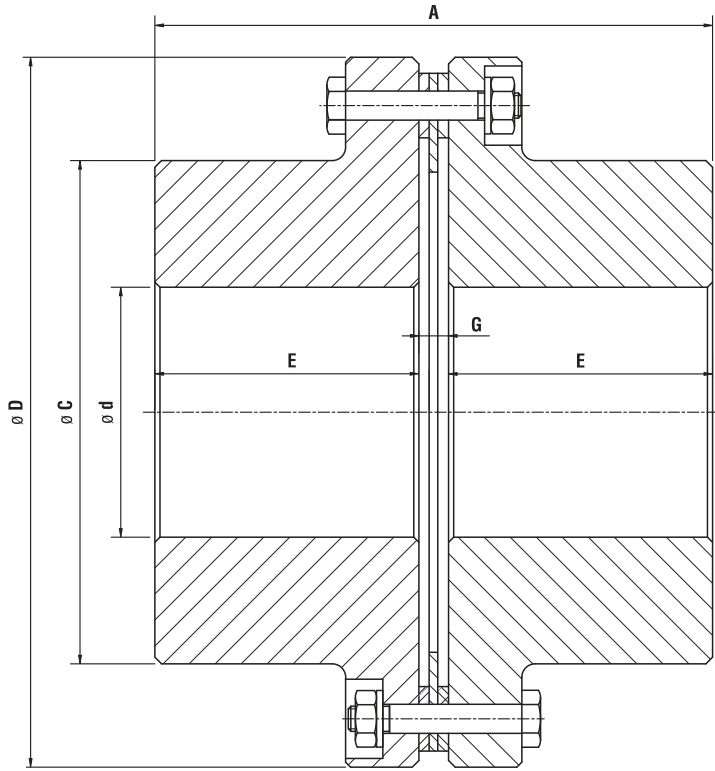

max. 0.5°

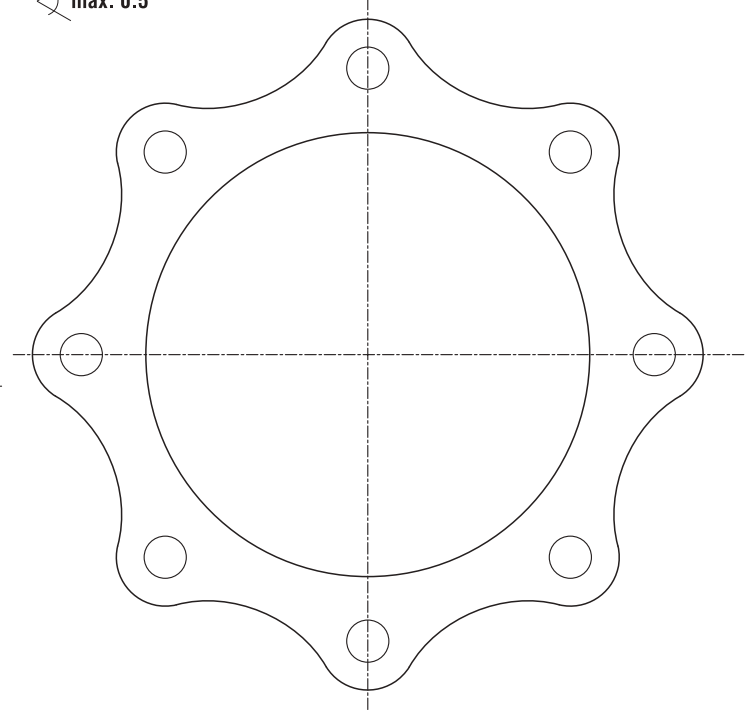

TİP S8		S8-1	S8-2	S8-3	S8-4	S8-5	S8-6	S8-7	S8-8	S8-9	S8-10	S8-11	S8-12	S8-13	S8-14	S8-15	S8-16	S8-17
ød max	mm	131	145	156	165	178	192	206	220	233	235	250	265	275	290	300	315	330
Tpeak	Nm	42000	62000	76000	94000	128000	174000	222000	278000	352000	444000	520000	636000	770000	910000	1060000	1220000	1410000
Tnominal	Nm	21000	31000	38000	47000	64000	87000	111000	139000	176000	222000	260000	318000	385000	455000	530000	610000	705000
°/grad		0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5
mm±		1.8	2	2.1	2.3	2.5	2.7	2.9	3.1	3.3	3.6	3.8	3.9	4.1	4.2	4.4	4.6	4.8
kg		39	51	63	75	101	130	158	200	245	272	320	381	446	541	610	685	792
kgm²		0.348	0.540	0.756	1.03	1.68	2.51	3.59	5.25	7.22	8.67	11.49	15.39	20.42	27.9	33.9	41.3	52.1
A	mm	271.2	294.4	316	338.2	372	403.2	426.4	458.2	502	526	551.6	583.2	620.8	665.2	698.8	731.2	772.8
C	mm	183	201	219	230	249	269	289	309	327	330	350	370	385	410	420	440	460
D	mm	280	304	327	347	382	412	442	477	507	542	572	607	637	677	702	732	762
E	mm	125	135	145	155	170	185	195	210	230	240	250	265	280	300	315	330	350
G	mm	21.2	24.4	26	28.2	32	33.2	36.4	38.2	42	46	51.6	53.2	60.8	65.2	68.8	71.2	72.8

FLANŞLAR AISI 1040 MALZEMEDEN, ARA PARÇALAR 55Si7 MALZEMEDEN İMAL EDİLMEKTEDİR.

FLANGES HAVE BEEN MANUFACTURING FROM AISI 1040 MATERIAL, DISCS HAVE BEEN MANUFACTURED FROM 55Si7 MATERIAL.