




TİP Za

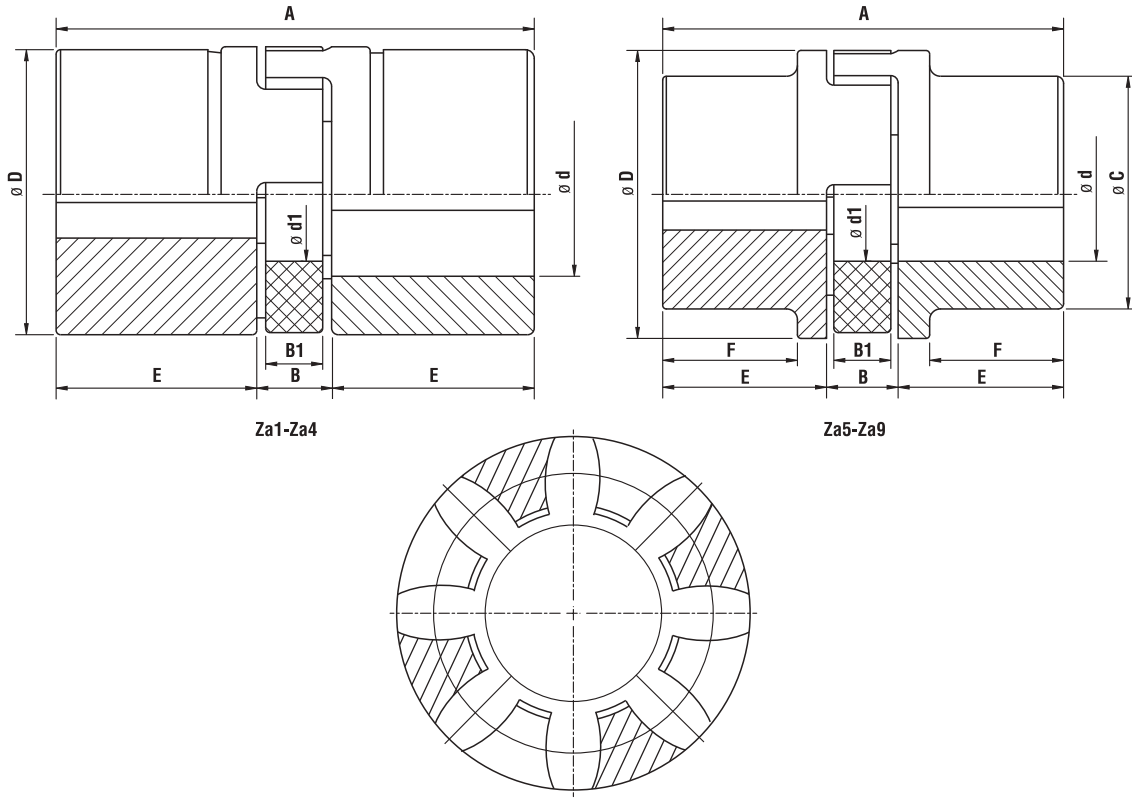

TİP Za			Za1	Za2	Za3	Za4	Za5	Za6	Za7	Za8	Za9
Malzeme / Material			Aluminyum veya Çelik Aluminium or Steel				Çelik / Steel				
	Ød	max	24	28	38	45					
		min	6	8	10	12					
	Ød	max	25	35	40	48	55	62	74	80	95
		min	0	0	0	0	0	0	0	0	0
 Ød1		mm	18	27	30	38	46	51	60	68	80
	Tpeak		Nm	34	120	320	405	900	1050	1370	1880
	Tnominal		Nm	17	60	160	325	450	525	685	940
A		mm	66	78	90	114	126	140	160	185	210
B		mm	16	18	20	24	26	28	30	35	40
B1		mm	12	14	15	18	20	21	22	26	30
C		mm					85	95	110	115	135
D		mm	40	55	65	80	95	105	120	135	160
E		mm	25	30	35	45	50	56	65	75	85
F		mm					28	32	37	47	53

KAPLIN LASTİKLERİ 95-98 SHORE POLİÜRETANDAN ÜRETİLMEKTE OLUP KIRMIZI RENKTEDİR.

COUPLING RUBBERS HAVE BEEN MANUFACTURED FROM POLYURETHANE MATERIAL WHICH HAS 95-98 SHORE HARDNESS AND RED COLOURED.