






TİP Zr 1-14

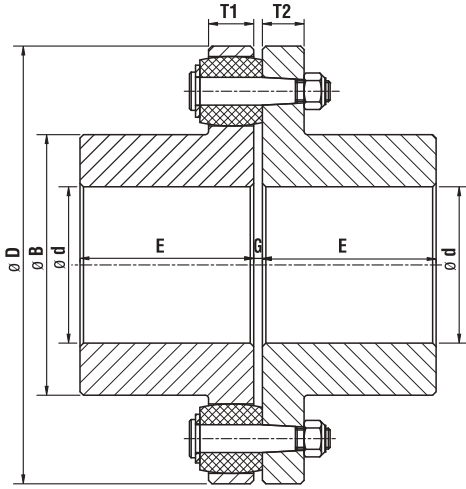

Tip-Zr1-Zr11

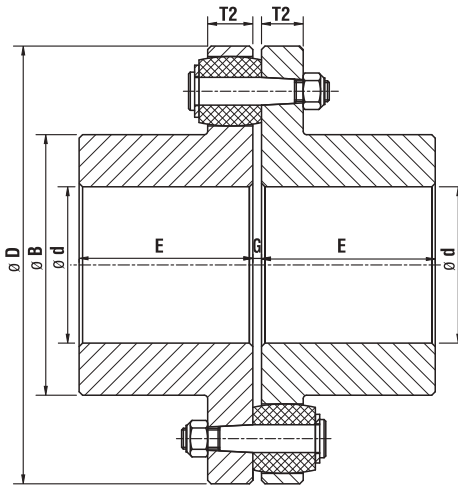

Tip-Zr12

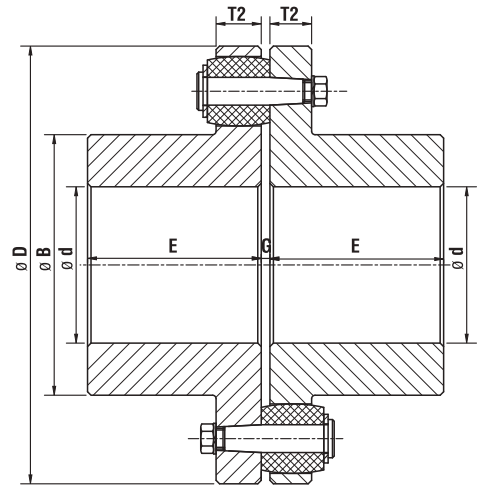


Tip-Zr13-14

TİP Zr 1-14		Zr1	Zr2	Zr3	Zr4	Zr5	Zr6	Zr7	Zr8	Zr9	Zr10	Zr11	Zr12	Zr13	Zr14
	max	38	48	55	60	70	80	90	100	110	120	130	140	160	180
	Ød min	0	0	0	0	0	0	0	0	48	55	65	75	85	95
	Tpeak	380	640	960	1440	1800	2500	4200	5200	8200	10400	15000	24000	36000	48000
	Tnominal	190	320	480	720	900	1250	2100	2600	4100	5200	7500	12000	18000	24000
	GG24	6900	5900	5150	4500	4100	3650	3250	2900	2500	2150	1900	1850	1750	1500
	AISI 1040	9900	8900	7700	6800	6200	5500	4800	4300	3750	3350	2900	2600	2250	2000
B	mm	55	67	78	87	104	123	132	153	167	184	205	230	260	290
D	mm	106	126	145	163	180	200	230	255	288	324	365	405	455	505
E	mm	46	51	56	61	71	81	91	101	111	127	142	163	185	210
G	mm	2~4	2~4	2~4	2~5	2~5	2~5	2~5	2~5	3~6	3~6	3~6	3~6	4~7	4~7
T1	mm	13	16	16	20	20	20	26	26	32	32	42	42	52	52
T2	mm	12	15	15	18	18	18	24	24	30	30	42			

GG24 DÖKÜM MALZEMEDEN veya AISI 1040 DÖVME MALZEMEDEN İMAL EDİLMEKTEDİR. LASTİKLARİ POLİÜRETAN MALZEMEDEN İMAL EDİLMEKTEDİR (~95 HS). LÜTFEN MALZEME CİNSİNE GÖRE DEVİR SEÇİNİZ.

PRODUCTS HAVE BEEN MANUFACTURED FROM GG24 OR AISI 1040 MATERIAL. RUBBERS HAVE BEEN MANUFACTURING FROM POLYURETHANE MATERIAL WICH HAS ~95 SHORE HARDNESS. PLEASE CHOOSE THE MATERIAL TYPE ACCORDING TO SPEED.

TİP Zr 15-26

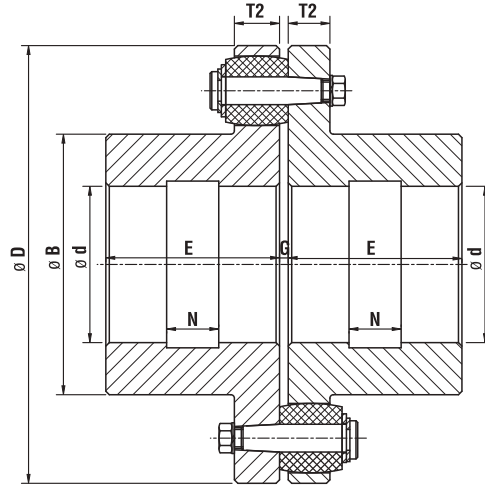

Tip Zr15-Zr26

TİP Zr 15-26		Zr15	Zr16	Zr17	Zr18	Zr19	Zr20	Zr21	Zr22	Zr23	Zr24	Zr25	Zr26
 ød max	mm	165	165	190	210	210	230	240	270	310	370	440	500
		200	200	220	240	240	260	270	300	350	410	480	540
		210	235	250	280	280	300	330	360	410	480	540	610
					310	340	370	400	460	510	580	640	
 ød min	mm	100	100	110	125	140	150	160	180	200	260	320	380
		165	165	190	210	210	230	240	270	310	370	440	500
		200	200	220	240	240	260	270	300	350	410	480	540
					280	300	330	360	410	480	540	610	
 Tpeak		76000	102000	166000	210000	290000	380000	520000	660000	1020000	1460000	1900000	2400000
	Tnominal	Nm	38000	51000	83000	105000	145000	190000	260000	330000	510000	730000	950000
 GG24	min ⁻¹	1450	1250	1100	1000	900	800	675	600	520	480	400	380
 AISI 1040	min ⁻¹	1950	1750	1500	1300	1200	1050	950	850	750	650	550	500
B	mm	250	250	290	320	320	355	360	410	465	565	660	760
	mm	300	300	330	360	360	395	410	460	525	625	720	820
	mm	320	355	385	420	425	460	495	540	620	720	820	920
	mm					465	515	560	610	700	770	870	960
D	mm	565	635	715	805	905	1010	1130	1280	1450	1650	1850	2100
E	mm	222	242	262	292	322	355	385	425	485	545	605	670
N	mm	75	80	80	95	105	115	125	135	1510	170	190	210
G	mm	4~8	4~8	5~9	5~9	5~10	5~10	6~11	6~11	6~12	6~12	8~16	8~16
T2	mm	68	68	80	80	90	90	100	100	120	120	140	140

GG24 DÖKÜM MALZEMEDEN veya AISI 1040 DÖVME MALZEMEDEN İMAL EDİLMEKTEDİR. LASTİKLERİ POLİÜRETAN MALZEMEDEN İMAL EDİLMEKTEDİR (~95 HS). LÜTFEN MALZEME ÇİNSİNE GÖRE DEVİR SEÇİNİZ.

PRODUCTS HAVE BEEN MANUFACTURED FROM GG24 OR AISI 1040 MATERIAL. RUBBERS HAVE BEEN MANUFACTURING FROM POLYURETHANE MATERIAL WICH HAS ~95 SHORE HARDNESS. PLEASE CHOOSE THE MATERIAL TYPE ACCORDING TO SPEED.