


FLEXIBLE COUPLING  
AFC-A

M 1501 337 E-EN-2007-09

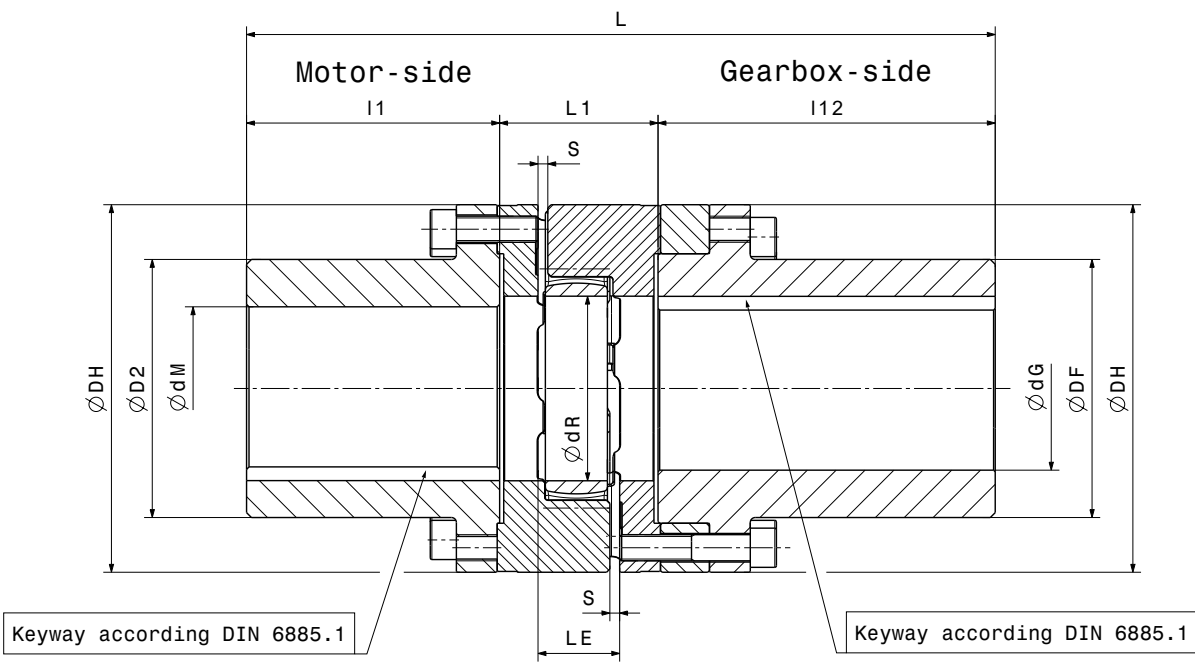


| Coupling Size                                              |      | AFC-65    | AFC-75    | AFC-90    | AFC-100   | AFC-110   | AFC-125   | AFC-140   | AFC-160   |
|------------------------------------------------------------|------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| $T_{kn}$                                                   | Nm   | 940       | 1920      | 3600      | 4950      | 7200      | 10000     | 12800     | 19200     |
| $T_{kmax}$                                                 | Nm   | 1880      | 3840      | 7200      | 9900      | 14400     | 20000     | 25600     | 38400     |
| $n_{max}$                                                  | rpm  | 3450      | 3250      | 3000      | 2800      | 2600      | 2250      | 1800      | 1500      |
| $\varnothing dG/\varnothing dM$<br>pilot bore<br>max. bore | mm   | 28        | 28        | 38        | 48        | 48        | 58        | 58        | 78        |
|                                                            | mm   | 65        | 75        | 100       | 110       | 125       | 145       | 165       | 190       |
| $\varnothing DH$                                           | mm   | 135       | 160       | 200       | 225       | 255       | 290       | 320       | 370       |
| $\varnothing D2$                                           | mm   | 94        | 108       | 142       | 158       | 178       | 206       | 235       | 270       |
| $\varnothing DF$                                           | mm   | 92        | 108       | 140       | 158       | 176       | 206       | 235       | 270       |
| $\varnothing dR$                                           | mm   | 68        | 80        | 100       | 113       | 127       | 147       | 165       | 190       |
| $l1$                                                       | mm   | 113.5     | 133       | 165.5     | 155       | 203.5     | 200.5     | 247       | 229       |
| $l12$                                                      | mm   | 166       | 166.5     | 206.5     | 206.5     | 212.0     | 212.0     | 252.5     | 252.5     |
| $lG1$                                                      | mm   | 150       | 150       | 190       | 190       | 195       | 195       | 235       | 235       |
| $L1$                                                       | mm   | 65        | 75        | 82        | 97        | 103       | 116       | 128       | 146       |
| $L$                                                        | mm   | 344.5     | 374.5     | 454       | 458.5     | 518.5     | 528.5     | 627.5     | 627.5     |
| $LE$                                                       | mm   | 35        | 40        | 45        | 50        | 55        | 60        | 65        | 75        |
| $S$                                                        | mm   | 4.5       | 5         | 5.5       | 6         | 6.5       | 7         | 7.5       | 9         |
| Cylinder bolt<br>DIN912-12.9                               | Qty. | 12xM10x30 | 15xM12x40 | 15xM16x40 | 15xM16x50 | 15xM20x50 | 15xM20x60 | 15xM20x60 | 15xM24x70 |
| $Ma$                                                       | Nm   | 83        | 120       | 295       | 295       | 580       | 580       | 580       | 1000      |

When selecting the coupling assembly, setting and maintenance instructions have to be observed. Other disc diameters upon request. Other dimensions upon request. Individual balancing of coupling components available upon request. Axial fixing of coupling hub possible with set- screw above the key upon request. Weight and inertia indicated for max. bore  $\varnothing dG$  and  $\varnothing dM$ .

FLEXIBLE COUPLING  
AFC-AS

M 1501 336 E-EN-2007-09

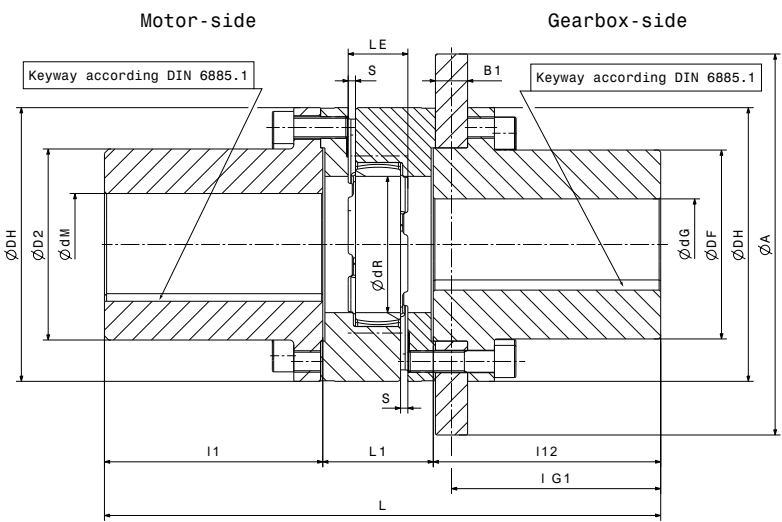

When selecting the coupling assembly, setting and maintenance instructions have to be observed. Other disc diameters upon request. Other dimensions upon request. Individual balancing of coupling components available upon request. Axial fixing of coupling hub possible with set-screw above the key upon request. Weight and inertia indicated for max. bore  $\varnothing dG$  and  $\varnothing dM$ .

| Coupling Size                                              |                  | AFC-65                                  | AFC-75    | AFC-90    | AFC-100   | AFC-110   | AFC-125   | AFC-140   | AFC-160   |
|------------------------------------------------------------|------------------|-----------------------------------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| $T_{kn}$                                                   | Nm               | 940                                     | 1920      | 3600      | 4950      | 7200      | 10000     | 12800     | 19200     |
| $T_{kmax}$                                                 | Nm               | 1880                                    | 3840      | 7200      | 9900      | 14400     | 20000     | 25600     | 38400     |
| $n_{max}$                                                  | rpm              | 3450                                    | 3250      | 3000      | 2800      | 2600      | 2250      | 1800      | 1500      |
| $\varnothing dG/\varnothing dM$<br>pilot bore<br>max. bore | mm               | 28                                      | 28        | 38        | 48        | 48        | 58        | 58        | 78        |
|                                                            | mm               | 65                                      | 75        | 100       | 110       | 125       | 145       | 165       | 190       |
| $\varnothing DH$                                           | mm               | 135                                     | 160       | 200       | 225       | 255       | 290       | 320       | 370       |
| $\varnothing D2$                                           | mm               | 94                                      | 108       | 142       | 158       | 178       | 206       | 235       | 270       |
| $\varnothing DF$                                           | mm               | 92                                      | 108       | 140       | 158       | 176       | 206       | 235       | 270       |
| $\varnothing dR$                                           | mm               | 68                                      | 80        | 100       | 113       | 127       | 147       | 165       | 190       |
| $l1$                                                       | mm               | 113.5                                   | 133       | 165.5     | 155       | 203.5     | 200.5     | 247       | 229       |
| $l12$                                                      | mm               | 166                                     | 166.5     | 206.5     | 206.5     | 212.0     | 212.0     | 252.5     | 252.5     |
| $lG1$                                                      | mm               | 150                                     | 150       | 190       | 190       | 195       | 195       | 235       | 235       |
| $L1$                                                       | mm               | 65                                      | 75        | 82        | 97        | 103       | 116       | 128       | 146       |
| $L$                                                        | mm               | 344.5                                   | 374.5     | 454       | 458.5     | 518.5     | 528.5     | 627.5     | 627.5     |
| $LE$                                                       | mm               | 35                                      | 40        | 45        | 50        | 55        | 60        | 65        | 75        |
| $S$                                                        | mm               | 4.5                                     | 5         | 5.5       | 6         | 6.5       | 7         | 7.5       | 9         |
| Cylinder bolt<br>DIN912-12.9                               | Qty.             | 12xM10x30                               | 15xM12x40 | 15xM16x40 | 15xM16x50 | 15xM20x50 | 15xM20x60 | 15xM20x60 | 15xM24x70 |
| $Ma$                                                       | Nm               | 83                                      | 120       | 295       | 295       | 580       | 580       | 580       | 1000      |
| $\varnothing Axb1$ brake disc                              |                  | * Design, weight m, moment of inertia J |           |           |           |           |           |           |           |
| $\varnothing 315x30$                                       | kg               | 30,7                                    |           |           |           |           |           |           |           |
|                                                            | kgm <sup>2</sup> | 0,254                                   |           |           |           |           |           |           |           |
| $\varnothing 355x30$                                       | kg               | 36                                      |           |           |           |           |           |           |           |
|                                                            | kgm <sup>2</sup> | 0,393                                   |           |           |           |           |           |           |           |
| $\varnothing 400x30$                                       | kg               | 42,3                                    | 50.5      | 64.4      |           |           |           |           |           |
|                                                            | kgm <sup>2</sup> | 0,616                                   | 0.627     | 0,759     |           |           |           |           |           |
| $\varnothing 450x30$                                       | kg               | 50,1                                    | 58.3      | 72        |           |           |           |           |           |
|                                                            | kgm <sup>2</sup> | 0,969                                   | 0.978     | 1.104     |           |           |           |           |           |
| $\varnothing 500x30$                                       | kg               |                                         | 67.1      | 80.8      | 94.3      | 113.4     |           |           |           |
|                                                            | kgm <sup>2</sup> |                                         | 1.472     | 1.595     | 1.773     | 1.97      |           |           |           |
| $\varnothing 560x30$                                       | kg               |                                         | 78.9      | 92.6      | 106.1     | 124.9     | 150.5     |           |           |
|                                                            | kgm <sup>2</sup> |                                         | 2.297     | 2.417     | 2.6       | 2.776     | 3.268     |           |           |
| $\varnothing 630x30$                                       | kg               |                                         |           | 108       | 121.5     | 140.3     | 165.9     | 208.2     |           |
|                                                            | kgm <sup>2</sup> |                                         |           | 3.774     | 3.968     | 4.127     | 4.622     | 5.411     |           |
| $\varnothing 710x30$                                       | kg               |                                         |           | 127.8     | 141.3     | 160.1     | 185.5     | 228       | 281       |
|                                                            | kgm <sup>2</sup> |                                         |           | 5.992     | 6.18      | 6.32      | 6.842     | 7.62      | 9.434     |
| $\varnothing 800x30$                                       | kg               |                                         |           |           |           | 185.3     | 210.9     | 253.2     | 306.2     |
|                                                            |                  |                                         |           |           |           | 9.909     | 10.412    | 11.193    | 13.02     |