


NOSTOS SYSTEM WIRING


STM32 NUCLEO-F411RE / 3.3V LOGIC / COMMON GND
Signal mapping: PINS.md | MCU configuration: firmware/stm32/nostos_stm32.ioc

UART / DISPLAY / AUDIO

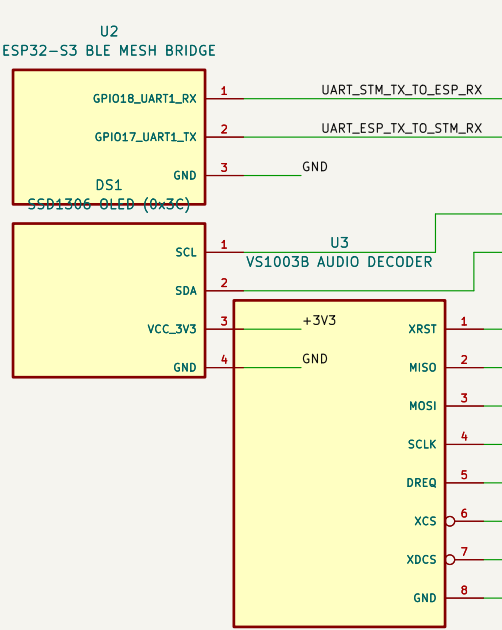


VS1003B supply is breakout-dependent. Confirm its VIN rating; all signal levels remain 3.3V.

ACTIVE SENSORS

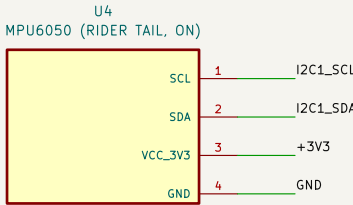


MPU6050_SENSOR=ON | I2C1 PB8/PB9 | address 0x68/0x69

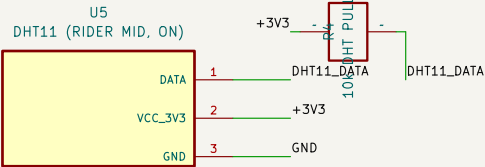

DHT11_SENSOR=ON | PA1 / A1

CONTROLS / OUTPUTS

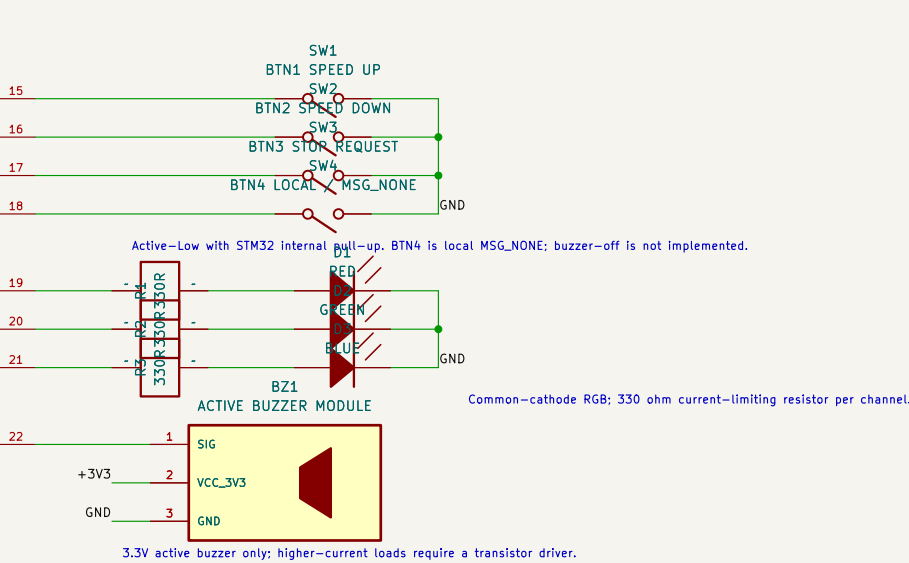

VARIANTS

Rider Head: Base configuration (SSD1306 + VS1003B)

Rider Mid: Base + DHT11 (ON)

Rider Tail: Base + MPU6050 (ON)

Rider Head=Base, Mid=Base+DHT11, Tail=Base+MPU6050
Documentation schematic – verify breakout module power ratings
STM32 NUCLEO-F411RE / 3.3V logic / Common GND
Based on PINS.md and firmware/stm32/nostos_stm32.ioc

NOSTOS

Sheet: /
File: nostos-wiring.kicad_sch

Title: NOSTOS System Wiring

Size: A3
KiCad E.D.A. 10.0.6

Date: 2026-08-31

Rev: 1.1

Id: 1/1