

Crown 120 Triplex Mud Pump

Typical Applications:

- Underground mining mud and slurry pumping
- Backfill pumping
- Raw sewage pumping
- Petro-Chemical bi-product and viscous product pumping
- Mill rolling plate descaling
- Deephole exploration downhole mud pumping for drilling lubrication

Technical features:

- Split type fabricated steel casing for ease of jackshaft removal and replacement

- Robust cast steel independent fluid end blocks for ease of replacement and elimination of pump downtime. All valve assemblies easily replaceable with minimum skill requirements eliminating pump downtime.

- Custom designed suction and delivery valve configurations and materials to suit particular fluid being pumped. (On special request only)


- All parts interchangeable with alternate mud pump models currently available within the mining industry

Tel: +27 618-2003 E-Mail: sales@cemo.co.za
Physical Addess: Crown Building, 64 Hanau Street, Jeppestown, JHB
Standard Trading Terms, Conditions and Warranties Apply And Are Available On request

- Typical SG of fluids from 1.05 to 1.20 readily achievable
- Typical input power from 75kW to 132kW dependent on pump duty required
- Heavy duty and heat treated ring gear and pinion sets
- Plungers: Hollowed and hardened or hollowed and hard faced with Tungsten or Hard Chrome for extended longevity
- Pushrods: Hard Chrome plated with Ramiex packed adjustable glands
- Connecting Rods/Crossheads and Eccentric: SG Nodular Iron
- Connecting Rod Liners and Crosshead Pin Bushes: Leaded gun metal
- Oil Stop Heads: Single piece gland packed with bronze guide rings
- Electrically controlled independent oil pump lubrication or jackshaft driven oil pump
- Oil over-temperature cut out probe and oil filter clogging indicator fitted as standard equipment
- Plunger diameters ranging from 76mm to 127mm (on Crown Hi-Flo 120™) provide a wide range of flows and pressures to suit client's exact requirements
- <u>Ancillary equipment and components supplied with pump</u>

  Full set maintenance spanners
  Plunger packing drift removal/installation tools
  Accumulator
  Shear Relief Valve
  2" High Pressure Isolation/Start-up Cock (Manually operated)
  Non-Return Valve
  Plunger washing system (optional as per client's request)
  Full set operating and maintenance manual in both hard copy and digital format
  On site commissioning both locally and globally

SI Units							US Imperial Units				
Plunger Diameter (mm)	Motor Pulley ø (mm)	Pump Pulley ø (mm)	Flowrate (l/s)	Head (m)	Pressure (bar)	Power (kW)	Plunger Diameter (in.)	Flowrate (gpm)	Head (ft)	Pressure (psi)	Power (hp)
76	265	1000	3.87	2400	235.29	132	3	61.34	7874.01	3412	178
76	335	1000	4.89	1900	186.27	132	3	77.51	6233.59	2701	178
76	375	1000	5.48	1700	166.67	132	3	86.86	5577.42	2417	178
89	265	1000	5.31	1750	171.57	132	3½	84.17	5741.47	2488	178
89	335	1000	6.71	1400	137.25	132	3½	106.36	4593.17	1990	178
89	375	1000	7.52	1250	122.55	132	3½	119.2	4101.05	1777	178
102	265	1000	6.98	1350	132.35	132	4	110.64	4429.13	1919	178
102	335	1000	8.82	1050	102.94	132	4	139.81	3444.88	1493	178
102	375	1000	9.87	950	93.13	132	4	156.45	3116.79	1350	178
114	265	1000	8.72	1050	102.94	132	4½	138.22	3444.88	1493	178
114	335	1000	11.02	850	83.33	132	4½	174.68	2788.71	1208	178
114	375	1000	12.33	750	73.53	132	4½	195.45	2460.63	1066	178

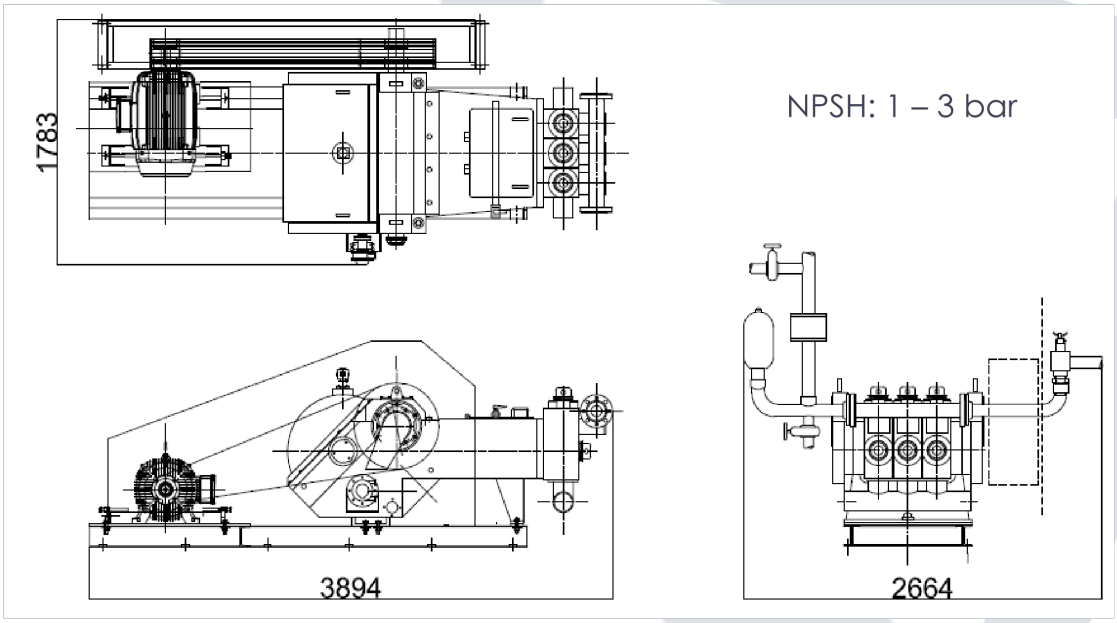

Data supplied may vary as required

Tel: +27 618-2003 E-Mail: sales@cemo.co.za
Physical Addess: Crown Building, 64 Hanau Street, Jeppestown, JHB
Standard Trading Terms, Conditions and Warranties Apply And Are Available On request

SI Units							US Imperial Units						
Plunger Diameter (mm)	Motor Pulley ø (mm)	Pump Pulley ø (mm)	Flowrate (l/s)	Head (in.)	Pressure (bar)	Power (kW)	Plunger Diameter (in.)	Motor Pulley ø (in.)	Pump Pulley ø (in.)	Flowrate (gpm)	Head (ft)	Pressure (psi)	Power (hpi)
SG: 1.05													
76	265	1000	3.87	2000	196.08	90	3	11	40	61.34	6561.68	2843	121
76	335	1000	4.89	1550	151.96	90	3	14	40	77.51	5085.3	2204	121
76	375	1000	5.48	1400	137.25	90	3	15	40	86.86	4593.17	1990	121
89	265	1000	5.31	1450	142.16	90	3½	11	40	54.17	4757.21	2061	121
89	335	1000	6.71	1150	112.74	90	3½	14	40	106.36	3772.96	1635	121
89	375	1000	7.52	1000	99.80	90	3½	15	40	199.2	3280.84	1421	121
102	265	1000	6.98	1100	107.84	90	4	11	40	110.64	3608.92	1564	121
102	335	1000	8.82	850	83.33	90	4	14	40	139.81	2788.71	1208	121
102	375	1000	9.87	750	73.53	90	4	15	40	156.45	2460.63	1066	121
114	265	1000	8.72	850	83.33	90	4½	11	40	135.22	2788.71	1208	121
114	335	1000	11.02	700	68.62	90	4½	14	40	147.68	2296.58	995	121
114	375	1000	12.33	600	58.82	90	4½	15	40	195.45	1968.5	853	121
SG: 1.10													
76	265	1000	3.87	2400	235.29	110	3	11	40	61.34	7874.01	3412	148
76	335	1000	4.89	1900	186.27	110	3	14	40	77.51	6233.59	2712	148
76	375	1000	5.48	1700	166.67	110	3	15	40	86.86	5577.42	2417	148
89	265	1000	5.31	1750	171.57	110	3.6	11	40	84.17	5741.47	2488	148
89	335	1000	6.71	1400	137.25	110	3.6	14	40	106.36	4593.17	1990	148
89	375	1000	7.52	1250	122.55	110	3.6	15	40	119.2	4101.05	1777	148
102	265	1000	6.98	1350	132.35	110	4.1	11	40	110.64	4429.13	1919	148
102	335	1000	8.82	1050	102.94	110	4.1	14	40	139.81	3444.88	1493	148
102	375	1000	9.87	950	93.13	110	4.1	15	40	156.45	3116.79	1350	148
114	265	1000	8.72	1050	102.94	110	4.5	11	40	138.22	3444.88	1493	148
114	335	1000	11.02	850	83.33	110	4.5	14	40	174.68	2788.71	1208	148
114	375	1000	12.33	750	73.53	110	4.5	15	40	195.45	2460.63	1066	148
SG: 1.30													
76	265	1000	3.87	2400	235.29	132	3	11	40	61.34	7874.01	3412	178
76	335	1000	4.89	1900	186.27	132	3	14	40	77.51	6233.59	2701	178
76	375	1000	5.48	1700	166.67	132	3	15	40	86.86	5577.42	2417	178
89	265	1000	5.31	1750	171.57	132	3.6	11	40	84.17	5741.47	2488	178
89	335	1000	6.71	1400	137.25	132	3.6	14	40	106.36	4593.17	1990	178
89	375	1000	7.52	1250	122.55	132	3.6	15	40	119.2	4101.05	1777	178

Tel: +27 618-2003 E-Mail: sales@cemo.co.za
Physical Addess: Crown Building, 64 Hanau Street, Jeppestown, JHB
Standard Trading Terms, Conditions and Warranties Apply And Are Available On request

102	265	1000	6.98	1350	132.35	132	4.1	11	40	110.64	4429.13	1919	178
102	335	1000	8.82	1050	102.94	132	4.1	14	40	139.81	3444.88	1493	178
102	375	1000	9.87	950	93.13	132	4.1	15	40	156.45	3116.79	1350	178
114	265	1000	8.72	1050	102.94	132	4.5	11	40	138.22	3444.88	1493	178
114	335	1000	11.02	850	83.33	132	4.5	14	40	174.68	2788.71	1208	178
114	375	1000	12.33	750	73.53	132	4.5	15	40	195.45	2460.63	1066	178

All figures quoted above are for 4-pole motors (1485-1490 RPM).
Recommended NPSH 9.5 → 10 KPa

All pumps available in both electric or diesel drive

NB: For diesel drive applications, baseplate configuration and dimensions are not as per specification listed above and are custom fabricated to suit engine of client's choice

Tel: +27 618-2003 E-Mail: sales@cemo.co.za
Physical Addess: Crown Building, 64 Hanau Street, Jeppestown, JHB
Standard Trading Terms, Conditions and Warranties Apply And Are Available On request