

CEMO STOMPER® by






Flows from 36 to 360m³/hr
Heads from 20 to 160m

Model	Inlet	Outlet	Impeller Diameter (mm)			Shaft Diameter (mm)	
			Nominal	Min	Max	Seal Size	End
125 x 100 - 315	125	100	315	274	342	53Ø	42

The Stomper pump is fully manufactured in South Africa to the highest quality, employing the best engineering practices available. It is designed and manufactured to internationally recognised ISO2858 standard.

Applications and Options:

- Manufactured for close coupling to electric motors.
- Suitable for pumping mine slurries, clean water, sea water, raw water, process water, waste water, sewage and hazardous as well as corrosive liquids.
- Supplied as bare shaft units or coupled to drives of your choice.
- Close coupled to drive mounted on galvanised baseplate or Pedestal type bearing housing available.
- Can be configured to suit a wide variety of application conditions which are not catered for by other manufacturers.
- All Wet-End components, Volute, Impeller, Wear Plate are made of 27% Chrome Iron Heat-treated for maximum abrasion resistance.
- Optional Tungsten Coated Impeller neck ring landings and Volute wetted area.

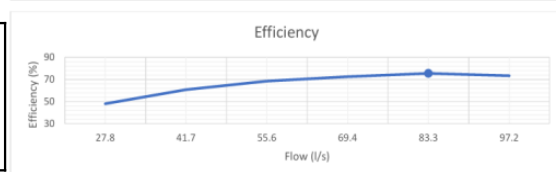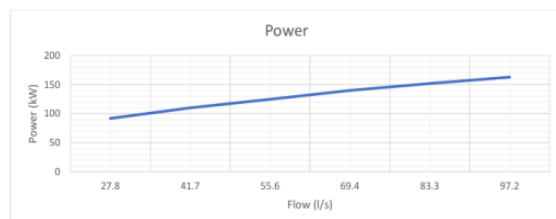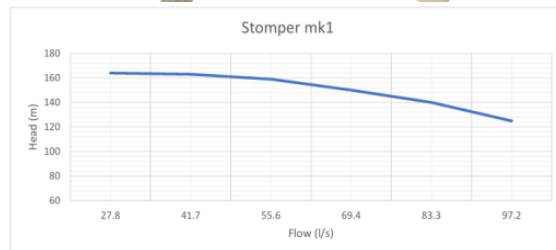

Performance data is based on 2 pole speed
Data is based on clean water at ambient temperature
Revision: 1

Tel: +27 618-2003 E-Mail: sales@cemo.co.za

Physical Address: Crown Building, 64 Hanau Street, Jeppestown, JHB, RSA
Standard Trading Terms, Conditions and Warranties Apply And Are Available On request