


HELICAL ROTOR

SP - Range



FEATURES:

- Positive Displacement
- High suction head up to 9 m. of vacuum or as ambient physical conditions will allow
- Continuous non pulsating flow
- Ability to handle hard and soft solids in suspension
- Ability to handle fibrous material
- Ability to handle extreme viscosities
- Abrasion Resistance
- Low shear characteristics
- Can be used as a proportioning or dosing pump
- Wide choice of material of construction
- Mechanical seal fitted
- Spare parts readily available at low cost
- Very reliable

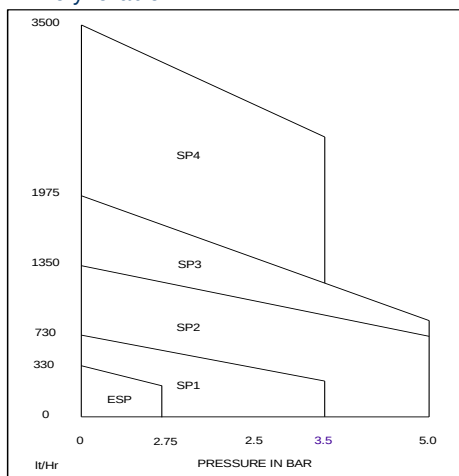

STANDARD MATERIAL OF CONSTRUCTION

Wetted Parts:

Rotor: 431 SS
431SS HCP
316SS
316SSHCP

Stator: Natural Rubber
Nitrile Rubber
High Nitrile Rubber
Hypalon
Viton

Universal Coupling: 431SS

Gland Section: Cast iron 316SS
End cover: Cast iron 316SS

Main shaft: 431SS

Non Standard options:

Wetted parts: Choice of a variety of exotic chemical resistant alloys
Choice of stator rubber composition to suit the Liquid being pumped

Drive Arrangement: Pump to be fitted by flange mounted direct drive, geared or variable speed motor

Tel: +27 618-2003 E-Mail: sales@cmo.co.za
Physical Address: Crown Building, 64 Hanau Street, Jeppesstown, JHB,RSA
Standard Trading Terms, Conditions and Warranties Apply And Are Available On request