

PPR C1 | DRV-M1-PL - TT60 common motor face plate

ENGINEERING REVIEW / RFQ ONLY - NOT RELEASED FOR CUTTING, PURCHASE OR ENERGIZATION

NOMINAL / LOCAL DATUM


X 70.000 Y(thickness) 6.000 Z 65.000

Material: S355 steel

Status: CUSTOM_DFM_HOLD

LOCAL X / Z HOLE CENTRES (mm)

H01	X	35.000	Z	32.500	DIA	32.200
H02	X	57.500	Z	32.500	DIA	5.500
H03	X	35.000	Z	55.000	DIA	5.500
H04	X	12.500	Z	32.500	DIA	5.500
H05	X	35.000	Z	10.000	DIA	5.500
H06	X	7.000	Z	7.000	DIA	6.600
H07	X	63.000	Z	7.000	DIA	6.600
H08	X	7.000	Z	58.000	DIA	6.600
H09	X	63.000	Z	58.000	DIA	6.600

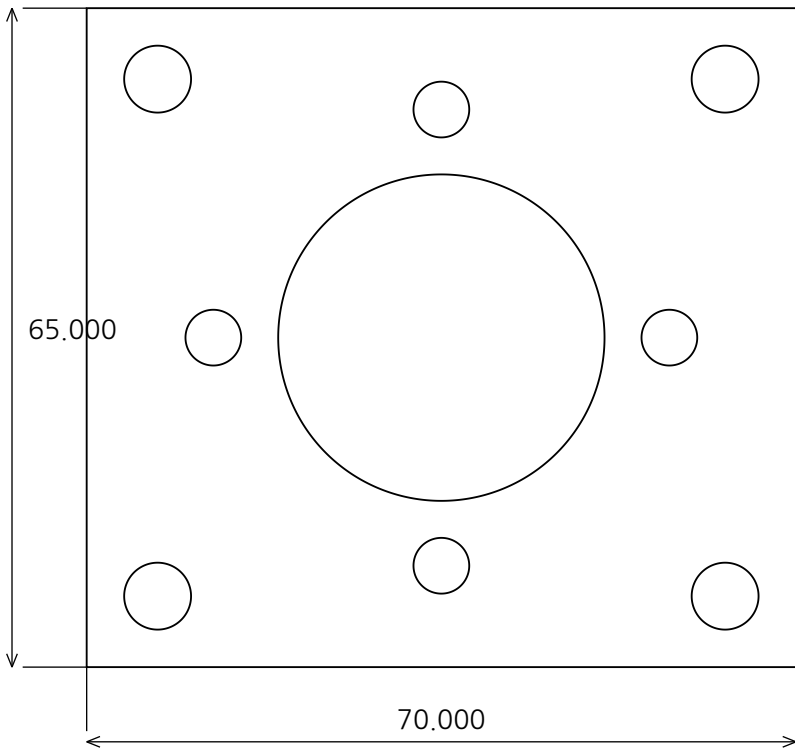

Motor axis datum(35,32.5); 4x5.5 THRU onPCD45. Confirm motor engagement depth.

General dimensions are nominal. Explicit fits/ground thickness override default dimensions. No unlisted thread, retention, edge radius, weld, surface treatment or assembly preload is inferred.

PPR C1 | DRV-BFRONT - Common front bearing plate

ENGINEERING REVIEW / RFQ ONLY - NOT RELEASED FOR CUTTING, PURCHASE OR ENERGIZATION

NOMINAL / LOCAL DATUM


X 140.000 Y(thickness) 18.000 Z 67.500

Material: S355 steel

Status: CUSTOM_DFM_HOLD

LOCAL X / Z HOLE CENTRES (mm)

H01	X	35.000	Z	40.000	DIA	28.000
H02	X	91.940	Z	40.000	DIA	47.000
H03	X	8.000	Z	8.000	DIA	6.600
H04	X	132.000	Z	8.000	DIA	6.600
H05	X	8.000	Z	60.000	DIA	6.600
H06	X	115.000	Z	60.000	DIA	6.600

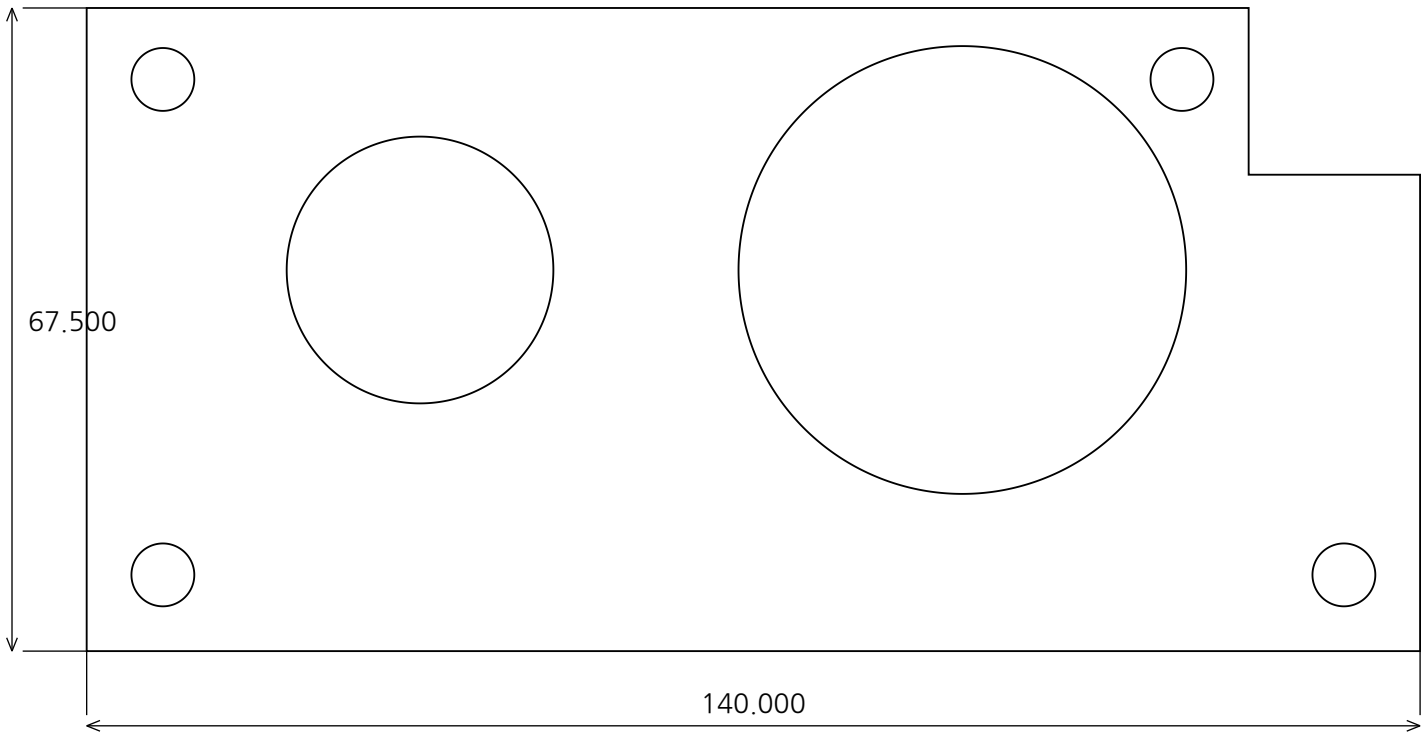

Two independent bores at56.9402 centres,28 H7 and47 H7. Combined plate avoids overlapping separate housings. Top92.5Z clears M2 can; upper-right corner relief clears coaxial bridge.

General dimensions are nominal. Explicit fits/ground thickness override default dimensions. No unlisted thread, retention, edge radius, weld, surface treatment or assembly preload is inferred.

PPR C1 | S1-BPL - S1 bearing carrier

ENGINEERING REVIEW / RFQ ONLY - NOT RELEASED FOR CUTTING, PURCHASE OR ENERGIZATION

NOMINAL / LOCAL DATUM


X 160.000 Y(thickness) 18.000 Z 100.000

Material: S355 steel

Status: CUSTOM_DFM_HOLD

LOCAL X / Z HOLE CENTRES (mm)

H01	X	50.000	Z	50.000	DIA	52.000
H02	X	110.000	Z	50.000	DIA	52.000
H03	X	10.000	Z	10.000	DIA	6.600
H04	X	10.000	Z	90.000	DIA	6.600
H05	X	150.000	Z	10.000	DIA	6.600
H06	X	150.000	Z	90.000	DIA	6.600

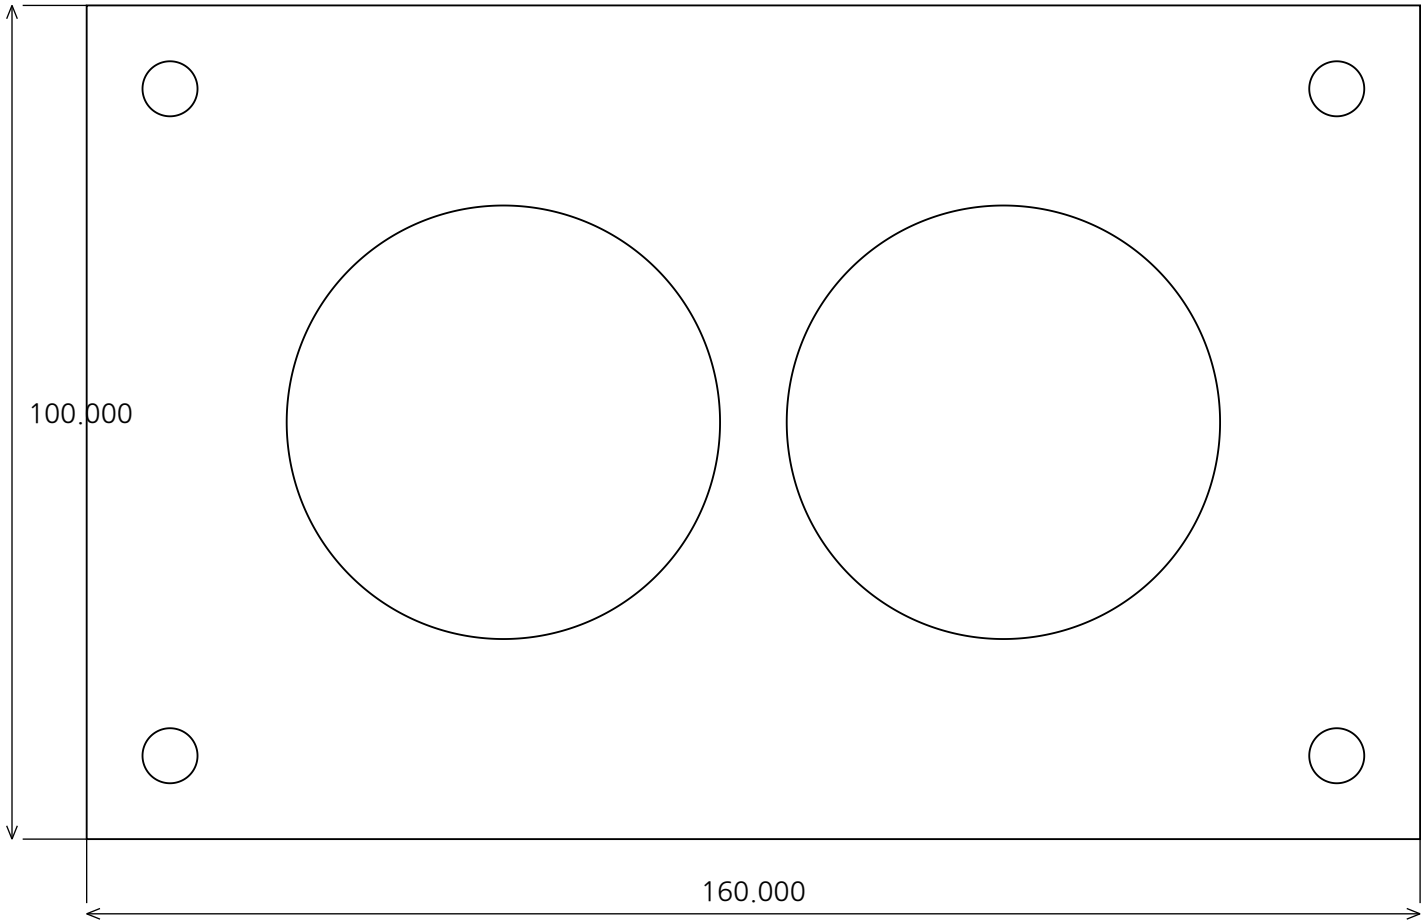

Two 52 H7 seats at 60.00 +/- 0.02 centres. Line bore assembled metal carriers. Datums A face, B base, C left edge.

General dimensions are nominal. Explicit fits/ground thickness override default dimensions. No unlisted thread, retention, edge radius, weld, surface treatment or assembly preload is inferred.

PPR C1 | S1-BR-CAP - Two-bearing retainer

ENGINEERING REVIEW / RFQ ONLY - NOT RELEASED FOR CUTTING, PURCHASE OR ENERGIZATION

NOMINAL / LOCAL DATUM


X 160.000 Y(thickness) 3.000 Z 100.000

Material: S355 steel

Status: CUSTOM_DFM_HOLD

LOCAL X / Z HOLE CENTRES (mm)

H01	X	50.000	Z	50.000	DIA	47.000
H02	X	110.000	Z	50.000	DIA	47.000
H03	X	10.000	Z	10.000	DIA	6.600
H04	X	10.000	Z	90.000	DIA	6.600
H05	X	150.000	Z	10.000	DIA	6.600
H06	X	150.000	Z	90.000	DIA	6.600

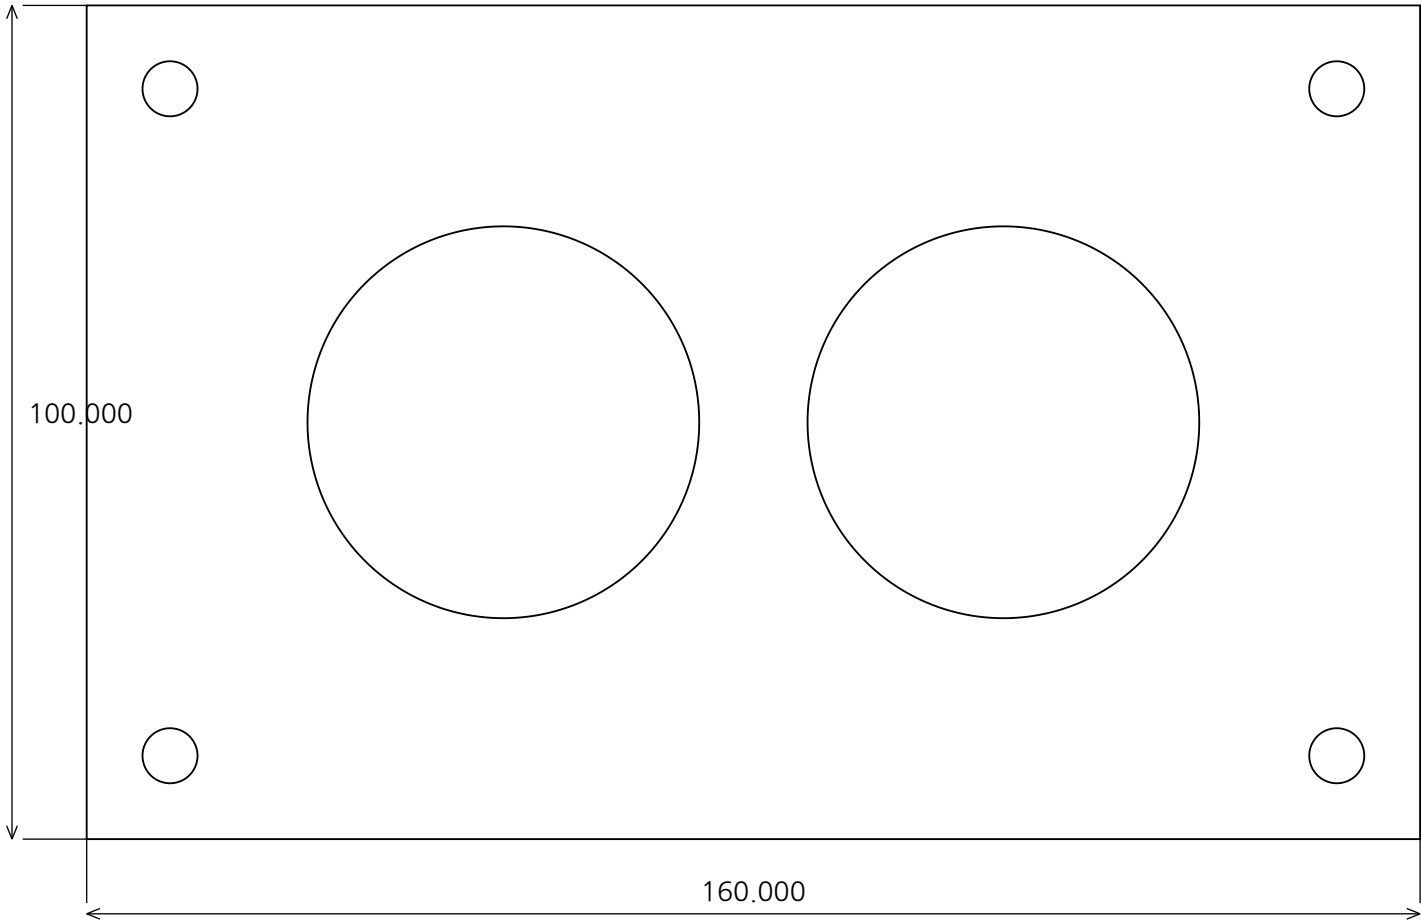

47 mm inner abutment per NSK6205; four M6 through bolts share carrier pattern. No overlapping round caps.

General dimensions are nominal. Explicit fits/ground thickness override default dimensions. No unlisted thread, retention, edge radius, weld, surface treatment or assembly preload is inferred.

PPR C1 | S1-CUT-A-P00 - S1 cutter A tooth phase 0 / common key datum

ENGINEERING REVIEW / RFQ ONLY - NOT RELEASED FOR CUTTING, PURCHASE OR ENERGIZATION

NOMINAL / LOCAL DATUM


X 78.338 Y(thickness) 6.000 Z 77.199

Material: Tool steel, heat treatment RFQ

Status: CUSTOM_DFM_HOLD

LOCAL X / Z HOLE CENTRES (mm)

H01 X 0.000 Z 0.000 DIA 25.000

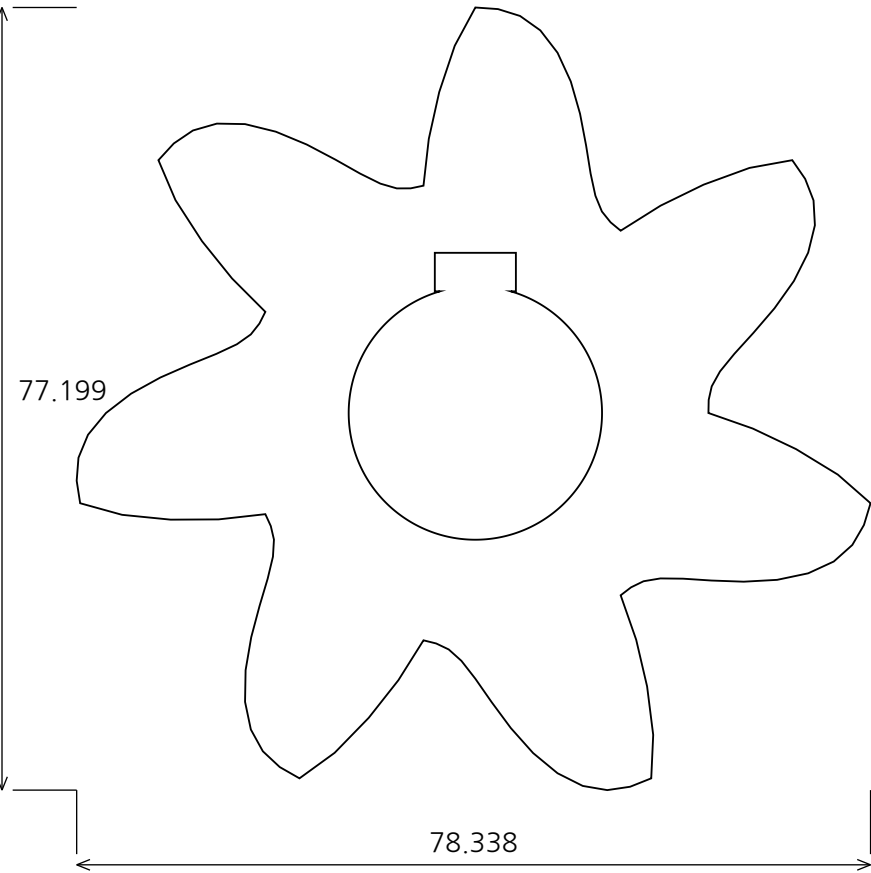

Final thickness 6.00 +/-0.02; bore25 H7; key8 Js9. Cut blank then heat-treat/grind, edge hardening not a laser-as-cut assumption. Tooth phase 0.000000 deg; KEY REMAINS ZERO. Mark part phase before grinding.

General dimensions are nominal. Explicit fits/ground thickness override default dimensions. No unlisted thread, retention, edge radius, weld, surface treatment or assembly preload is inferred.

PPR C1 | S1-CUT-B-P00 - S1 cutter B tooth phase 0 / common key datum

ENGINEERING REVIEW / RFQ ONLY - NOT RELEASED FOR CUTTING, PURCHASE OR ENERGIZATION

NOMINAL / LOCAL DATUM


X 78.338 Y(thickness) 6.000 Z 77.199

Material: Tool steel, heat treatment RFQ

Status: CUSTOM_DFM_HOLD

LOCAL X / Z HOLE CENTRES (mm)

H01 X 0.000 Z 0.000 DIA 25.000

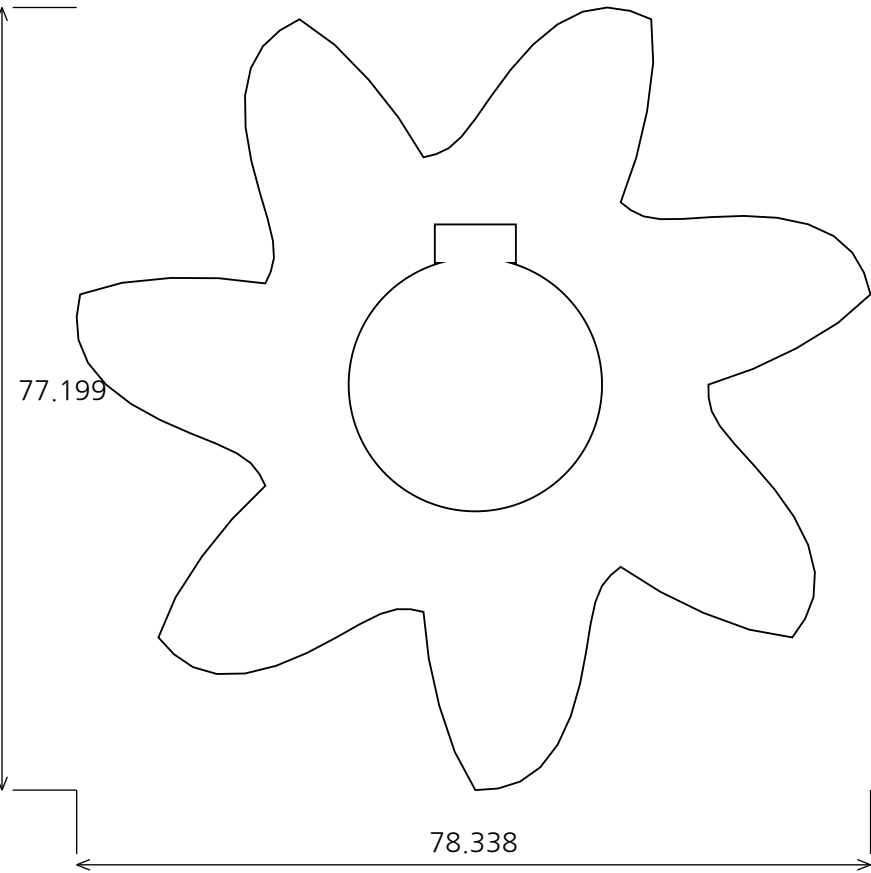


Final thickness 6.00 +/-0.02; bore25 H7; key8 Js9. Cut blank then heat-treat/grind, edge hardening not a laser-as-cut assumption. Tooth phase 0.000000 deg; KEY REMAINS ZERO. Mark part phase before grinding.

General dimensions are nominal. Explicit fits/ground thickness override default dimensions. No unlisted thread, retention, edge radius, weld, surface treatment or assembly preload is inferred.

PPR C1 | S2-GUIDE - 8-lobe cycloidal guide, 9 fixed pins

ENGINEERING REVIEW / RFQ ONLY - NOT RELEASED FOR CUTTING, PURCHASE OR ENERGIZATION

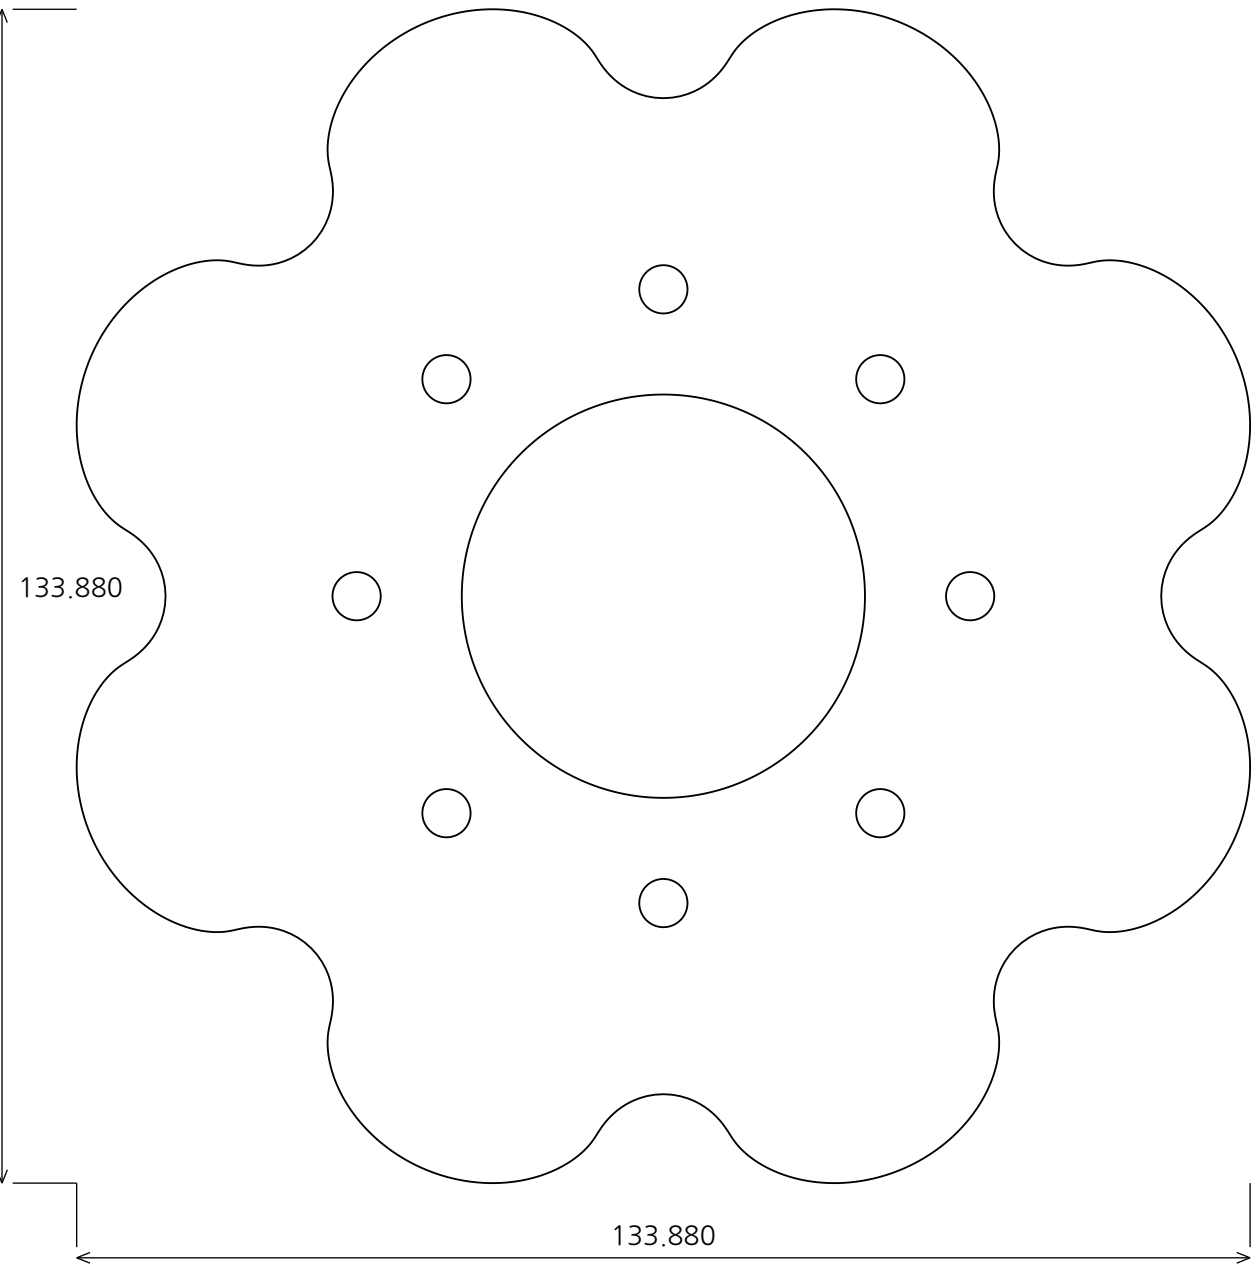

General dimensions are nominal. Explicit fits/ground thickness override default dimensions. No unlisted thread, retention, edge radius, weld, surface treatment or assembly preload is inferred.

NOMINAL / LOCAL DATUM

X 133.880 Y(thickness) 10.000 Z 133.880

Material: C45 surface treatment RFQ

Status: CUSTOM_DFM_HOLD

LOCAL X / Z HOLE CENTRES (mm)

H01	X	0.000	Z	0.000	DIA	46.000
H02	X	35.000	Z	0.000	DIA	5.500
H03	X	24.749	Z	24.749	DIA	5.500
H04	X	0.000	Z	35.000	DIA	5.500
H05	X	-24.749	Z	24.749	DIA	5.500
H06	X	-35.000	Z	0.000	DIA	5.500
H07	X	-24.749	Z	-24.749	DIA	5.500
H08	X	-0.000	Z	-35.000	DIA	5.500
H09	X	24.749	Z	-24.749	DIA	5.500

Rpin72 / e7 / rollerR8; analytic offset allowance0.20. 8x5.5 onPCD70. Profile generated from analytic equations; contact fatigue/backlash NOT qualified.

PPR C1 | S2-ECC - Eccentric sleeve35 / bore12 / e7

ENGINEERING REVIEW / RFQ ONLY - NOT RELEASED FOR CUTTING, PURCHASE OR ENERGIZATION

NOMINAL / LOCAL DATUM


X 35.000 Y(thickness) 80.000 Z 35.000

Material: C45

Status: CUSTOM_DFM_HOLD

LOCAL X / Z HOLE CENTRES (mm)

H01 X 0.000 Z 0.000 DIA 12.000

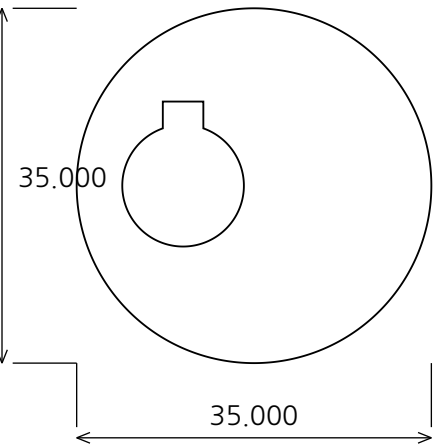


General dimensions are nominal. Explicit fits/ground thickness override default dimensions. No unlisted thread, retention, edge radius, weld, surface treatment or assembly preload is inferred.

Outside35 k6, bore12 H7, eccentricity7.00 +/-0.01; minimum geometric wall4.5. Separate sleeve permits bearing/rotor assembly; torque, key and fatigue validation pending.

PPR C1 | S2-PIN-F - Fixed pin ring F

ENGINEERING REVIEW / RFQ ONLY - NOT RELEASED FOR CUTTING, PURCHASE OR ENERGIZATION

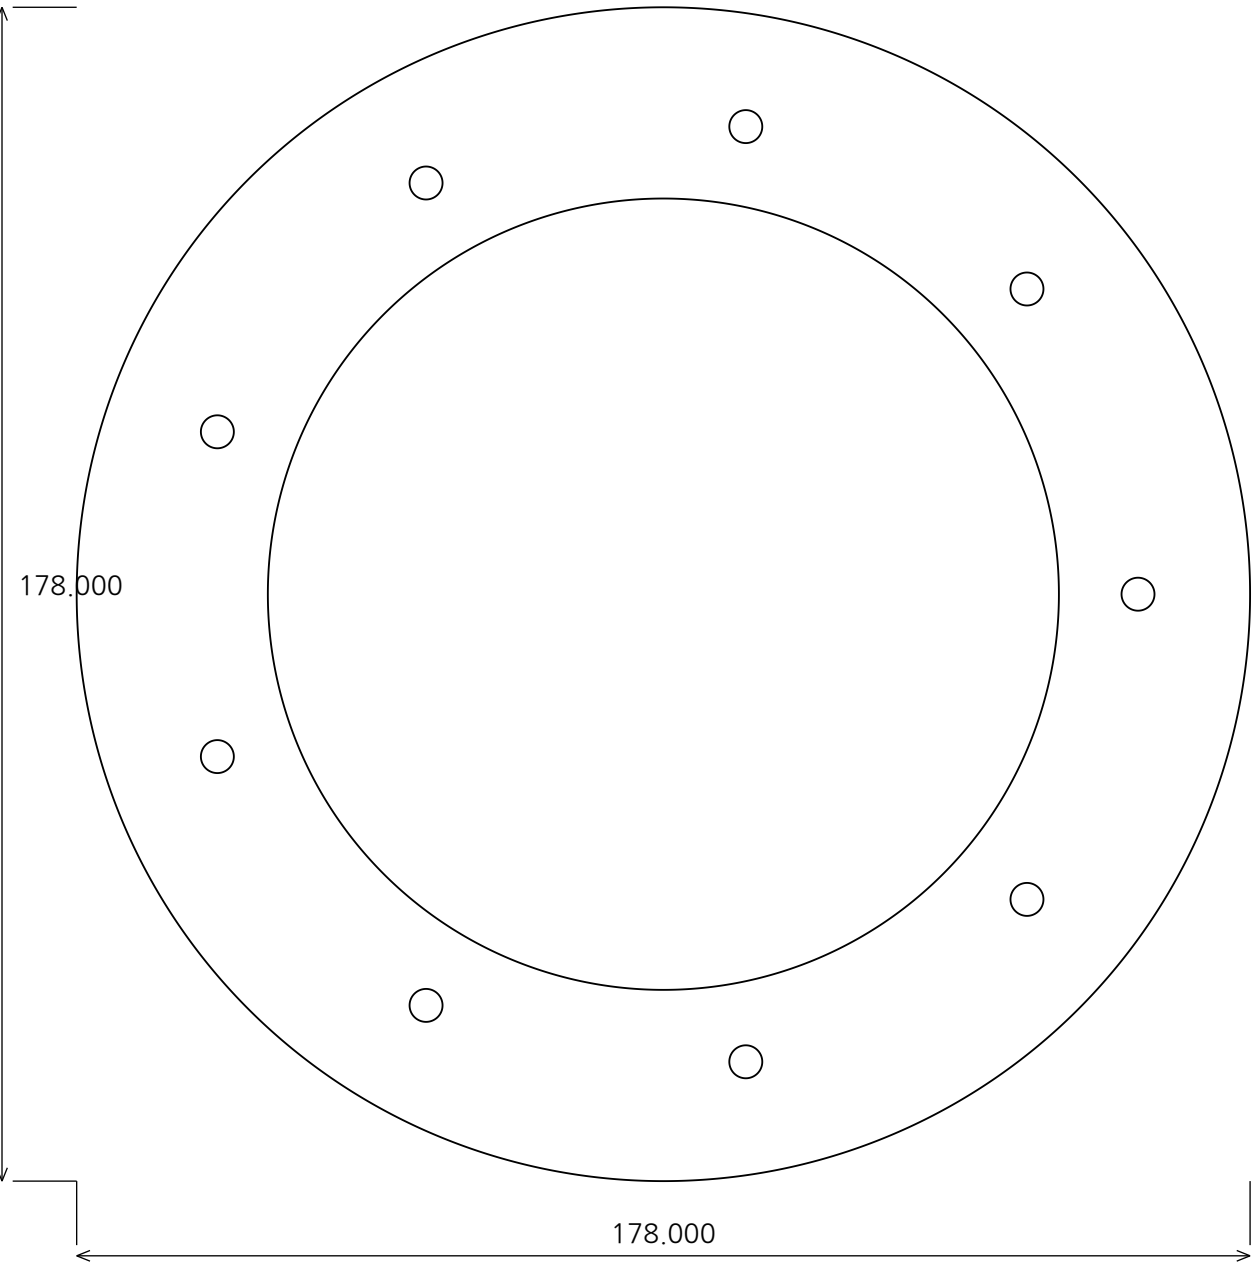

NOMINAL / LOCAL DATUM

X 178.000 Y(thickness) 6.000 Z 178.000

Material: C45

Status: CUSTOM_DFM_HOLD

LOCAL X / Z HOLE CENTRES (mm)


H01	X	0.000	Z	0.000	DIA	120.000
H02	X	72.000	Z	0.000	DIA	5.000
H03	X	55.155	Z	46.281	DIA	5.000
H04	X	12.503	Z	70.906	DIA	5.000
H05	X	-36.000	Z	62.354	DIA	5.000
H06	X	-67.658	Z	24.625	DIA	5.000
H07	X	-67.658	Z	-24.625	DIA	5.000
H08	X	-36.000	Z	-62.354	DIA	5.000
H09	X	12.503	Z	-70.906	DIA	5.000
H10	X	55.155	Z	-46.281	DIA	5.000

9x5 H7 holes onPCD144; 40deg pitch. Select precision shoulder pins, not threaded bolt shanks. Plate stays fixed.

General dimensions are nominal. Explicit fits/ground thickness override default dimensions. No unlisted thread, retention, edge radius, weld, surface treatment or assembly preload is inferred.

PPR C1 | S2-PIN-R - Fixed pin ring R

ENGINEERING REVIEW / RFQ ONLY - NOT RELEASED FOR CUTTING, PURCHASE OR ENERGIZATION

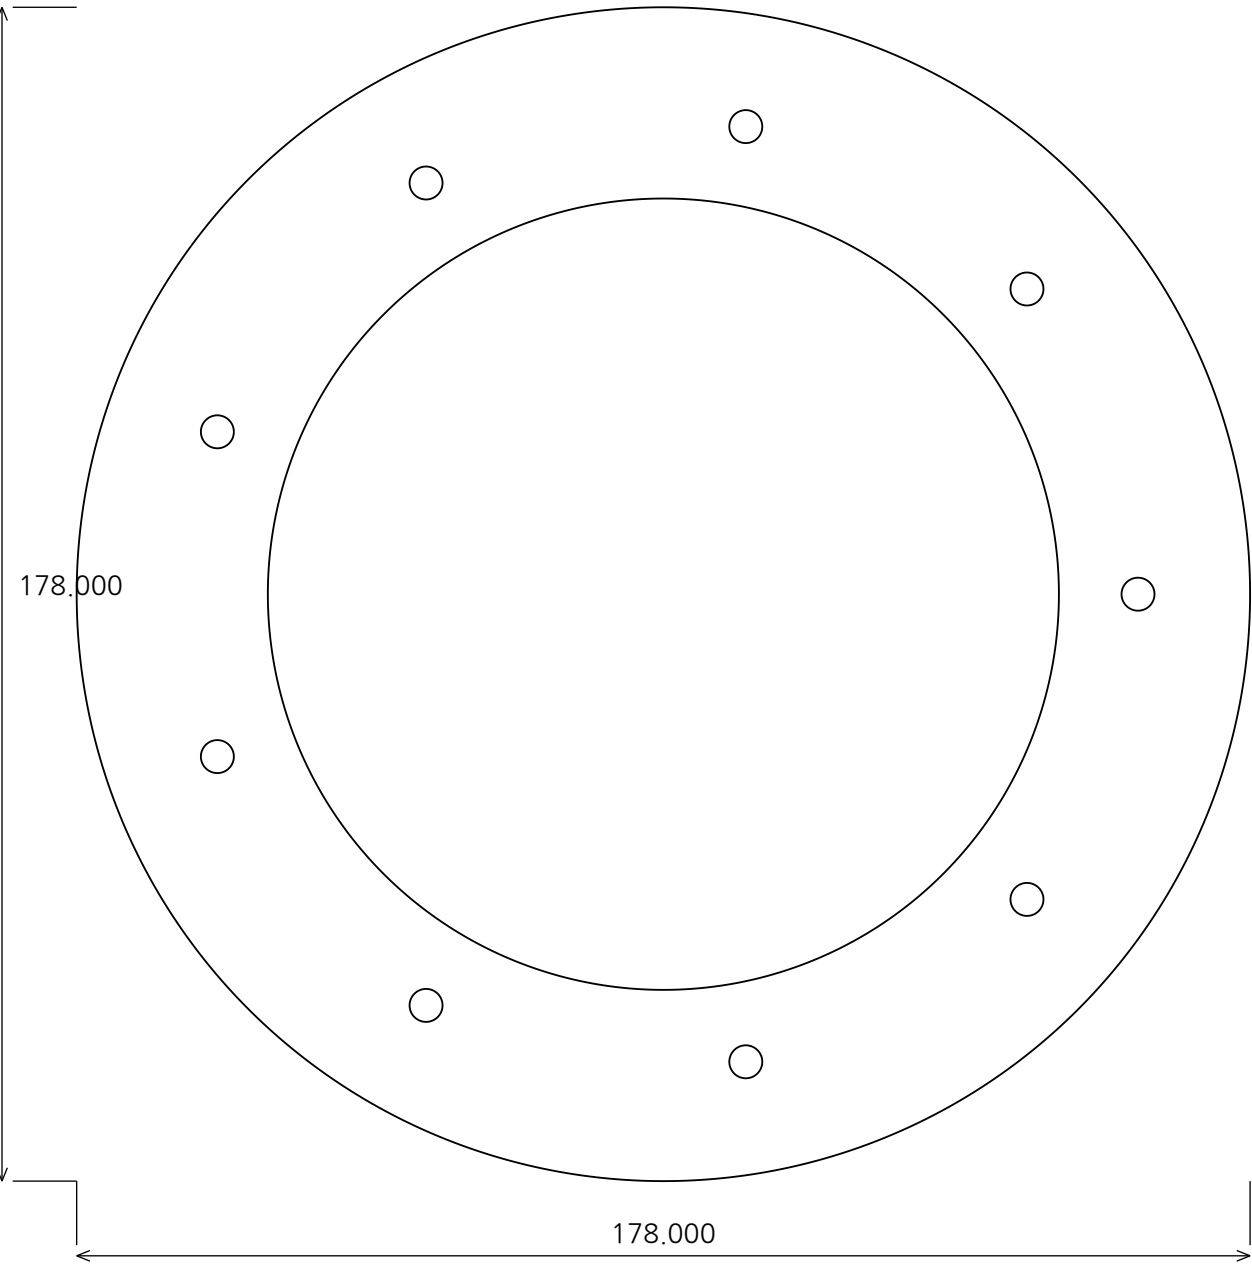

NOMINAL / LOCAL DATUM

X 178.000 Y(thickness) 6.000 Z 178.000

Material: C45

Status: CUSTOM_DFM_HOLD

LOCAL X / Z HOLE CENTRES (mm)


H01	X	0.000	Z	0.000	DIA	120.000
H02	X	72.000	Z	0.000	DIA	5.000
H03	X	55.155	Z	46.281	DIA	5.000
H04	X	12.503	Z	70.906	DIA	5.000
H05	X	-36.000	Z	62.354	DIA	5.000
H06	X	-67.658	Z	24.625	DIA	5.000
H07	X	-67.658	Z	-24.625	DIA	5.000
H08	X	-36.000	Z	-62.354	DIA	5.000
H09	X	12.503	Z	-70.906	DIA	5.000
H10	X	55.155	Z	-46.281	DIA	5.000

9x5 H7 holes onPCD144; 40deg pitch. Select precision shoulder pins, not threaded bolt shanks. Plate stays fixed.

General dimensions are nominal. Explicit fits/ground thickness override default dimensions. No unlisted thread, retention, edge radius, weld, surface treatment or assembly preload is inferred.

PPR C1 | Shaft / screw interface schedule


ENGINEERING REVIEW / RFQ ONLY - NOT RELEASED FOR CUTTING, PURCHASE OR ENERGIZATION

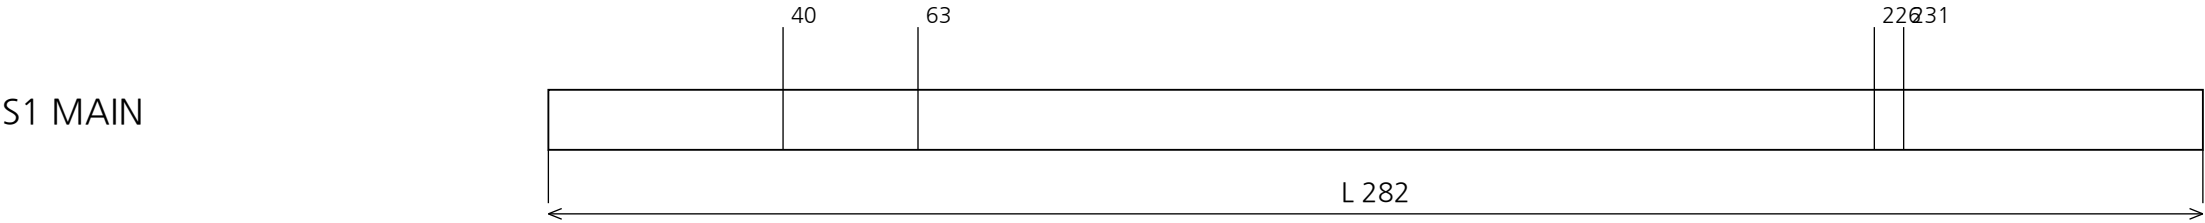


Local Y origin100; all26 cutter keys remain at common zero; axial retention HOLD.



Centre distance60.000; cutter total width161.000; axial clearance0.200 nominal.

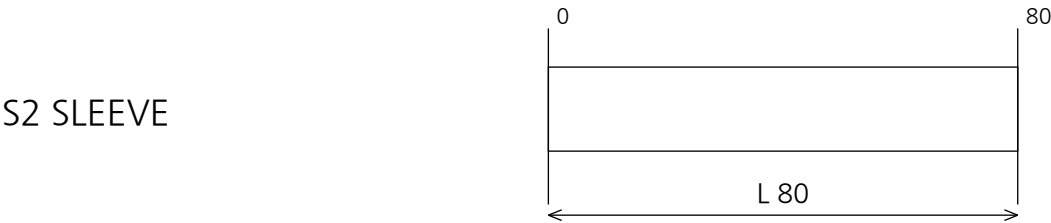

Eccentricity7.000 +/-0.010; roller bearing bore35; geometric minimum wall4.500.

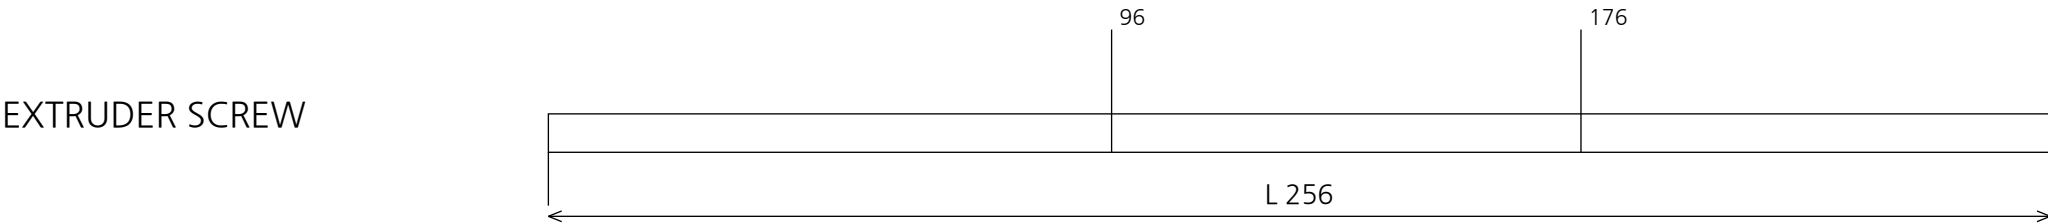

P16, flight2, roots10 /13, radial barrel clearance0.150; machining/finish/pressure seal HOLD.

CUTTER PHASE TABLE - OUTER TEETH ROTATE, KEY DATUM DOES NOT

P00	0.00000 deg	A x1 / B x1	final thickness	6.00 +/-0.02
P01	3.95604 deg	A x1 / B x1	final thickness	6.00 +/-0.02
P02	7.91209 deg	A x1 / B x1	final thickness	6.00 +/-0.02
P03	11.86813 deg	A x1 / B x1	final thickness	6.00 +/-0.02
P04	15.82418 deg	A x1 / B x1	final thickness	6.00 +/-0.02
P05	19.78022 deg	A x1 / B x1	final thickness	6.00 +/-0.02
P06	23.73626 deg	A x1 / B x1	final thickness	6.00 +/-0.02
P07	27.69231 deg	A x1 / B x1	final thickness	6.00 +/-0.02
P08	31.64835 deg	A x1 / B x1	final thickness	6.00 +/-0.02
P09	35.60440 deg	A x1 / B x1	final thickness	6.00 +/-0.02
P10	39.56044 deg	A x1 / B x1	final thickness	6.00 +/-0.02
P11	43.51648 deg	A x1 / B x1	final thickness	6.00 +/-0.02
P12	47.47253 deg	A x1 / B x1	final thickness	6.00 +/-0.02

SCREEN BLANK

Neutral-line length 111.352

Width40.000 / steel thickness2.000

78 holes DIA4.000

13 angular positions x6 axial rows

Inside bend radius62.800

Bend K factor0.5 is an assumption, verify coupon.

S1 bearing bore52 H7 / journal25 k6

S1 cutter bore25 H7 / key8 Js9

S2 sleeve OD35 k6 / eccentricity7 +/-0.01

S2 guide bore46 / 8 holesD5.5 PCD70

Ring pins9xD5 H7 / PCD144 /40deg pitch

Matched axial stacks must be inspected.

Independent +/-0.02 spacers can accumulate

more error than the0.2 nominal blade clearance.