

# MFG-ExtruderFrontSlidingGuide · v0.8 MANUFACTURING DRAWING


TOP X-Y



FRONT X-Z



SIDE Y-Z

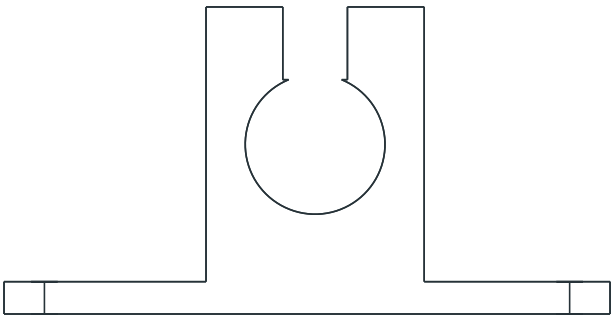

Drawing MFG-ExtruderFrontSlidingGuide | Part ExtruderFrontSlidingGuide — ExtruderFrontSlidingGuide | Qty 1

Rev final-design-fabrication-closure-v0.8 | Units mm | Scale NTS, dimensions govern | Third-angle projection | source commit

5008ee78988e17bcd38904df27b48af28fd8c594

Material: 8 mm S275 steel | Process/finish: laser/waterjet rough + bore/face finish

Overall: X 8.000 × Y 150.000 × Z 76.000 mm | general tolerance ISO 2768-m unless noted

Critical: guide bore  $\varnothing 34.60 +0.10/0$ ; 2 ×  $\varnothing 6.6$  rail holes; datum face flatness 0.10; bore position  $\pm 0.10$ ; cold axial travel  $\geq 1.50$  mm; no axial clamp

GD&T/datums: A=profile mounting plane; B=barrel axis; C=rear axial datum; verify datum marking on supplier inspection report

Inspection: CMM/caliper against STEP and drawing; deburr and visual crack/warp inspection; barrel-axis alignment; sliding travel and cold/hot clearance inspection

Edges: remove burrs; break unspecified sharp edges C0.3–0.5. No unapproved material/tolerance substitution.

Artifact check: PASS only; fabrication HOLD pending full v0.8 gates. Physical NOT\_RUN; machining USER\_APPROVAL\_REQUIRED.