


MFG-CUT-06 • v0.8 MANUFACTURING DRAWING

TOP X-Y



FRONT X-Z

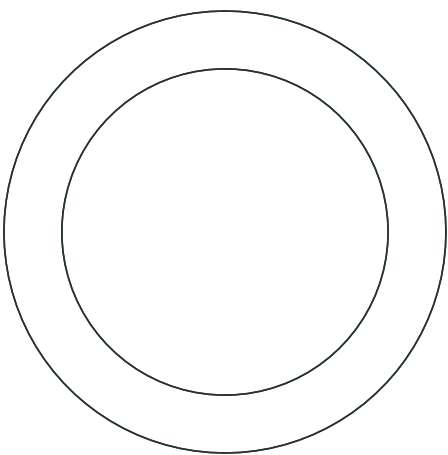

SIDE Y-Z



Drawing MFG-CUT-06 | Part CUT-06 — Phase gear axial spacer | Qty 2

Rev final-design-fabrication-closure-v0.8 | Units mm | Scale NTS, dimensions govern | Third-angle projection | source commit
d09fe9bc0a587c2aadf27557c7d2bed8bf3f9424

Material: S45C normalized steel | Process/finish: simple turning

Overall: X 34.000 × Y 34.000 × Z 4.000 mm | general tolerance ISO 2768-m unless noted

Critical: OD 34.0; bore 25.10 +0.05/0; length 4.00 +/-0.03; faces parallel within 0.03

GD&T/datums: A=shaft bore axis; B=stack face; C=key/dowel angular datum; verify datum marking on supplier inspection report

Inspection: CMM/caliper against STEP and drawing; deburr and visual crack/warp inspection; CMM centre distance; blue-check backlash/contact; verify keyed torque path

Edges: remove burrs; break unspecified sharp edges C0.3–0.5. No unapproved material/tolerance substitution.

Artifact check: PASS only; fabrication HOLD pending full v0.8 gates. Physical NOT_RUN; machining USER_APPROVAL_REQUIRED.