



MFG-DRV-03R • v0.8 MANUFACTURING DRAWING


TOP X-Y

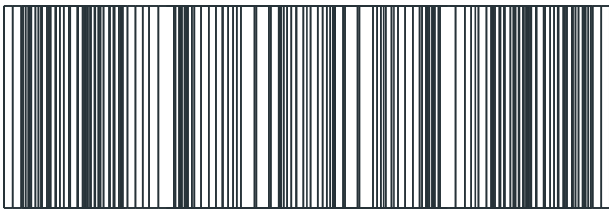

FRONT X-Z

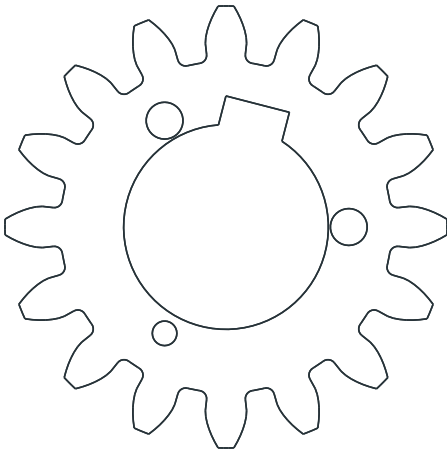

SIDE Y-Z

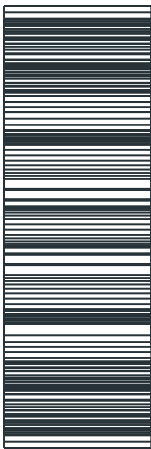

Drawing MFG-DRV-03R | Part DRV-03R — M3 Z16 solid phase gear right | Qty 1
Rev final-design-fabrication-closure-v0.8 | Units mm | Scale NTS, dimensions govern | Third-angle projection | source commit
d09fe9bc0a587c2aadf27557c7d2bed8bf3f9424
Material: 18 mm S45C | Process/finish: wire-EDM profile/bore/keyway + finish
Overall: X 53.996 × Y 18.000 × Z 53.996 mm | general tolerance ISO 2768-m unless noted
Critical: same tooth form and full-rotation pair backlash acceptance as DRV-03; matched 8.005-8.010 keyway clocked 14.464 +/-0.02 deg from tooth
datum so installed tooth phase 11.25 deg matches CUT-05R key datum 25.714 deg
GD&T/datums: A=shaft bore axis; B=stack face; C=key/dowel angular datum; verify datum marking on supplier inspection report
Inspection: CMM/caliper against STEP and drawing; deburr and visual crack/warp inspection; CMM centre distance; blue-check backlash/contact;
verify keyed torque path
Edges: remove burrs; break unspecified sharp edges C0.3–0.5. No unapproved material/tolerance substitution.
Artifact check: PASS only; fabrication HOLD pending full v0.8 gates. Physical NOT_RUN; machining USER_APPROVAL_REQUIRED.