



MFG-EX-CPN-SCR · v0.8 MANUFACTURING DRAWING


TOP X-Y

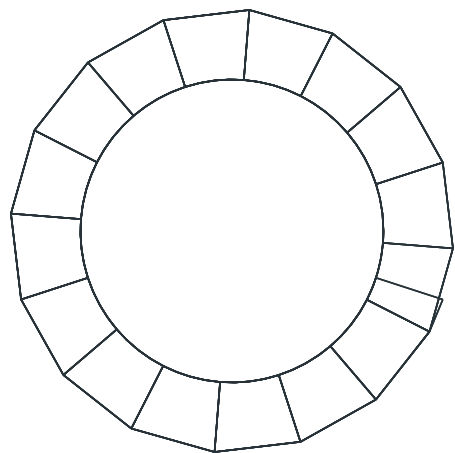

FRONT X-Z

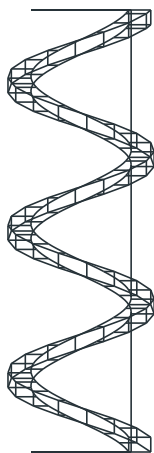

SIDE Y-Z

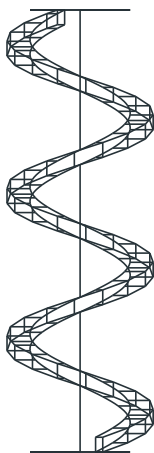

Drawing MFG-EX-CPN-SCR | Part EX-CPN-SCR — Three-pitch screw process coupon | Qty 1
Rev final-design-fabrication-closure-v0.8 | Units mm | Scale NTS, dimensions govern | Third-angle projection | source commit
d09fe9bc0a587c2aadf27557c7d2bed8bf3f9424
Material: same certified SCM440 heat as EX-SCR-01 | Process/finish: same flight mill/polish/nitride route as EX-SCR-01
Overall: X 15.871 × Y 15.871 × Z 48.000 mm | general tolerance ISO 2768-m unless noted
Critical: L48.00; three pitches; OD/root/land/finish/case same as feed zone; coupon RFQ only
GD&T/datums: A=common journal/bore axis; B=drive/feed datum face; C=feed-port angular plane; verify datum marking on supplier inspection report
Inspection: CMM/caliper against STEP and drawing; deburr and visual crack/warp inspection; certified material/heat-treatment report;
three-station bore/OD and TIR report
Edges: remove burrs; break unspecified sharp edges C0.3–0.5. No unapproved material/tolerance substitution.
Artifact check: PASS only; fabrication HOLD pending full v0.8 gates. Physical NOT_RUN; machining USER_APPROVAL_REQUIRED.