


MFG-FD-MET-02 • v0.8 MANUFACTURING DRAWING

TOP X-Y



FRONT X-Z

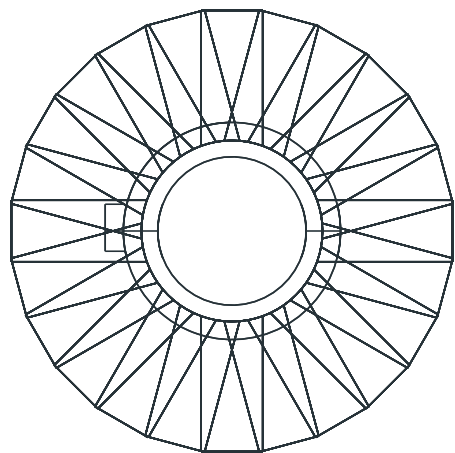

SIDE Y-Z



Drawing MFG-FD-MET-02 | Part FD-MET-02 — Positive-displacement metering auger | Qty 1

Rev final-design-fabrication-closure-v0.8 | Units mm | Scale NTS, dimensions govern | Third-angle projection | source commit d09fe9bc0a587c2aadf27557c7d2bed8bf3f9424

Material: 304 stainless | Process/finish: turn root/bore + mill or weld continuous flight

Overall: X 24.414 × Y 24.414 × Z 105.000 mm | general tolerance ISO 2768-m unless noted

Critical: OD24.60 -0.05/0 x105; root Ø10 with local Ø12 x8 pin boss at Z4–12; bore Ø8.20 +0.10/0; Ø3.00 +0.05/0 cross-hole at Z8; pitch18; deburr/polish Ra≤3.2; Gate-2 sets mass/rev

GD&T/datums: A=material-flow axis; B=mounting face; C=drive/sensor centre plane; verify datum marking on supplier inspection report

Inspection: CMM/caliper against STEP and drawing; deburr and visual crack/warp inspection; dry assembly rotation and cleanout/dead-pocket inspection

Edges: remove burrs; break unspecified sharp edges C0.3–0.5. No unapproved material/tolerance substitution.

Artifact check: PASS only; fabrication HOLD pending full v0.8 gates. Physical NOT_RUN; machining USER_APPROVAL_REQUIRED.