


MFG-FM-GA-01 · v0.8 MANUFACTURING DRAWING

TOP X-Y



FRONT X-Z

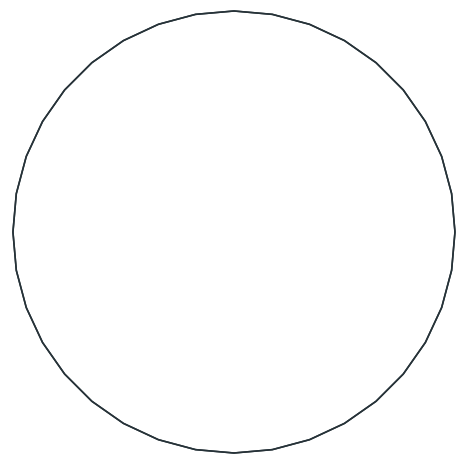

SIDE Y-Z



Drawing MFG-FM-GA-01 | Part FM-GA-01 — Guide roller fixed axle | Qty 1

Rev final-design-fabrication-closure-v0.8 | Units mm | Scale NTS, dimensions govern | Third-angle projection | source commit
d09fe9bc0a587c2aadf27557c7d2bed8bf3f9424

Material: Ø5 h6 stainless shaft | Process/finish: cut/face + E-clip grooves or collars

Overall: X 5.000 × Y 5.000 × Z 30.000 mm | general tolerance ISO 2768-m unless noted

Critical: Ø5 h6=4.992-5.000 x30; SKF625-2Z bore4.992-5.000; two E-clips/collars outside PPR-C08; bearing inner-ring clamp must not preload outer rings; no printed axle

GD&T/datums: A=common journal axis; B=drive-end shoulder/face; C=keyway or retaining feature plane; verify datum marking on supplier inspection report

Inspection: CMM/caliper against STEP and drawing; deburr and visual crack/warp inspection; micrometer bearing seats; dial-indicator TIR/runout between centres

Edges: remove burrs; break unspecified sharp edges C0.3–0.5. No unapproved material/tolerance substitution.

Artifact check: PASS only; fabrication HOLD pending full v0.8 gates. Physical NOT_RUN; machining USER_APPROVAL_REQUIRED.