



# MFG-SP-RL-01 · v0.8 MANUFACTURING DRAWING


TOP X-Y

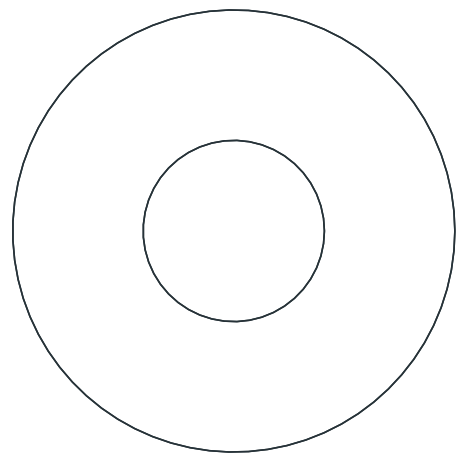

FRONT X-Z

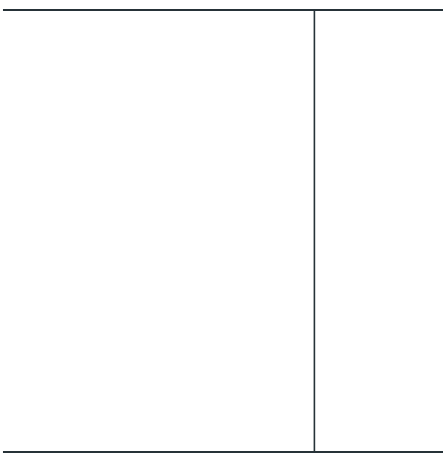

SIDE Y-Z

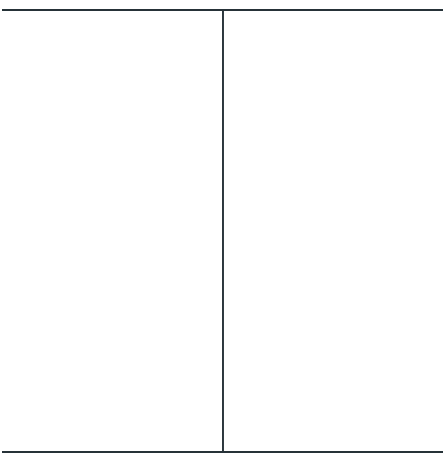

Drawing MFG-SP-RL-01 | Part SP-RL-01 — Dancer end roller | Qty 1

Rev final-design-fabrication-closure-v0.8 | Units mm | Scale NTS, dimensions govern | Third-angle projection | source commit d09fe9bc0a587c2aadf27557c7d2bed8bf3f9424

Material: POM-C | Process/finish: turn + bore

Overall: X 20.000 × Y 20.000 × Z 20.000 mm | general tolerance ISO 2768-m unless noted

Critical: OD20 x20; bore Ø8.20 +0.05/0; diametral axle clearance0.20-0.259; free rotation under 0.2-1.0 N filament tension

GD&T/datums: A=frame mounting plane; B=primary edge; C=mounting-hole centreline; verify datum marking on supplier inspection report

Inspection: CMM/caliper against STEP and drawing; deburr and visual crack/warp inspection; fit-up, PE bond where metal, reach/access and interlock actuation inspection

Edges: remove burrs; break unspecified sharp edges C0.3–0.5. No unapproved material/tolerance substitution.

Artifact check: PASS only; fabrication HOLD pending full v0.8 gates. Physical NOT\_RUN; machining USER\_APPROVAL\_REQUIRED.