

MFG-SP-TR-01 · v0.8 MANUFACTURING DRAWING


TOP X-Y



FRONT X-Z



SIDE Y-Z

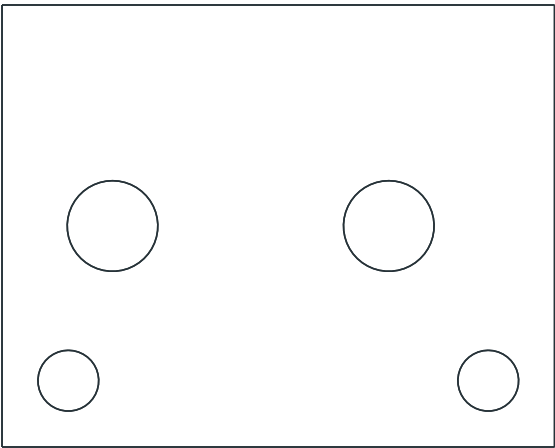

Drawing MFG-SP-TR-01 | Part SP-TR-01 — Traverse rod end plate | Qty 2

Rev final-design-fabrication-closure-v0.8 | Units mm | Scale NTS, dimensions govern | Third-angle projection | source commit
d09fe9bc0a587c2aadf27557c7d2bed8bf3f9424

Material: 5 mm 6061-T6 | Process/finish: waterjet + ream

Overall: X 5.000 × Y 50.000 × Z 40.000 mm | general tolerance ISO 2768-m unless noted

Critical: 5 x50 x40; two finished Ø8.20–8.30 at 25 mm spacing; 2xØ5.5 mount; use two Ø8 h6=7.991–8.000 x160 ground steel rods; match-ream pair
and accept rod parallelism <=0.10/160

GD&T/datums: A=frame mounting plane; B=primary edge; C=mounting-hole centreline; verify datum marking on supplier inspection report

Inspection: CMM/caliper against STEP and drawing; deburr and visual crack/warp inspection; fit-up, PE bond where metal, reach/access and
interlock actuation inspection

Edges: remove burrs; break unspecified sharp edges C0.3–0.5. No unapproved material/tolerance substitution.

Artifact check: PASS only; fabrication HOLD pending full v0.8 gates. Physical NOT_RUN; machining USER_APPROVAL_REQUIRED.