


# MFG-DRV-A60 • v0.8 MANUFACTURING DRAWING

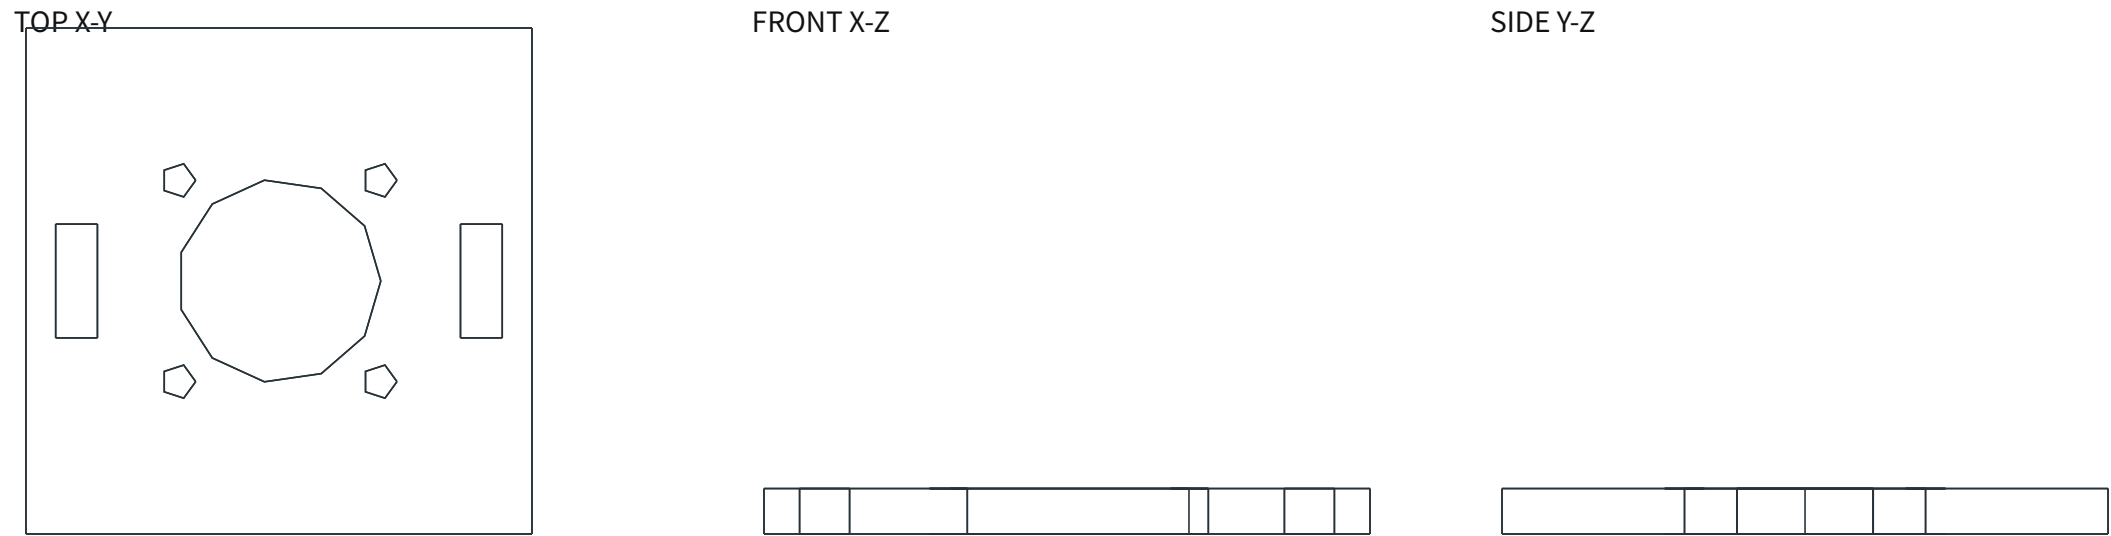

Drawing MFG-DRV-A60 | Part DRV-A60 — GMP60-60127 selected adapter plate | Qty 1

Rev final-design-fabrication-closure-v0.8 | Units mm | Scale NTS, dimensions govern | Third-angle projection | source commit  
df59fd138780f538a5fa62dad6e2770b49bf4d94

Material: 6 mm SS400 steel | Process/finish: laser + drill/ream

Overall: X 80.000 × Y 80.000 × Z 6.000 mm | general tolerance ISO 2768-m unless noted

Critical: 80 x80 x6; centre Ø32.2; 4xØ5.5 PCD45; two 6.6x18 universal slots; match official motor drawing before order

GD&T/datums: A=frame mounting plane; B=primary edge; C=mounting-hole centreline; verify datum marking on supplier inspection report

Inspection: CMM/caliper against STEP and drawing; deburr and visual crack/warp inspection; fit-up, PE bond where metal, reach/access and interlock actuation inspection

Edges: remove burrs; break unspecified sharp edges C0.3–0.5. No unapproved material/tolerance substitution.

Release: PASS — physical validation NOT\_RUN; procurement and machining USER\_APPROVAL\_REQUIRED.