


MFG-SP-BP-01 · v0.8 MANUFACTURING DRAWING

TOP X-Y



FRONT X-Z

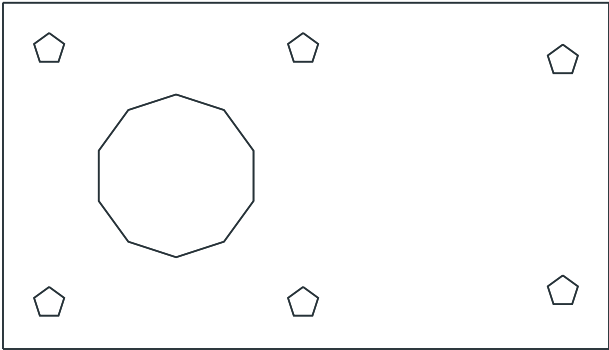

SIDE Y-Z



Drawing MFG-SP-BP-01 | Part SP-BP-01 — Spool 6001 bearing plate | Qty 2

Rev final-design-fabrication-closure-v0.8 | Units mm | Scale NTS, dimensions govern | Third-angle projection | source commit df59fd138780f538a5fa62dad6e2770b49bf4d94

Material: 5 mm 6061-T6 | Process/finish: waterjet + bearing-seat finish

Overall: X 105.000 × Y 5.000 × Z 60.000 mm | general tolerance ISO 2768-m unless noted

Critical: 105 x5 x60; bearing centre X30, Ø28.2; 4xØ5.5 bearing block + 2xØ5.5 profile tab; matched axis position ±0.05; bearing outer ring retained by metal washer/clip

GD&T/datums: A=frame mounting face; B=primary bearing axis; C=secondary bearing/fastener axis; verify datum marking on supplier inspection report

Inspection: CMM/caliper against STEP and drawing; deburr and visual crack/warp inspection; bore gauge; matched-pair centre distance and axis parallelism

Edges: remove burrs; break unspecified sharp edges C0.3–0.5. No unapproved material/tolerance substitution.

Release: PASS — physical validation NOT_RUN; procurement and machining USER_APPROVAL_REQUIRED.