


MFG-EX-DIE-01 · v0.8 MANUFACTURING DRAWING

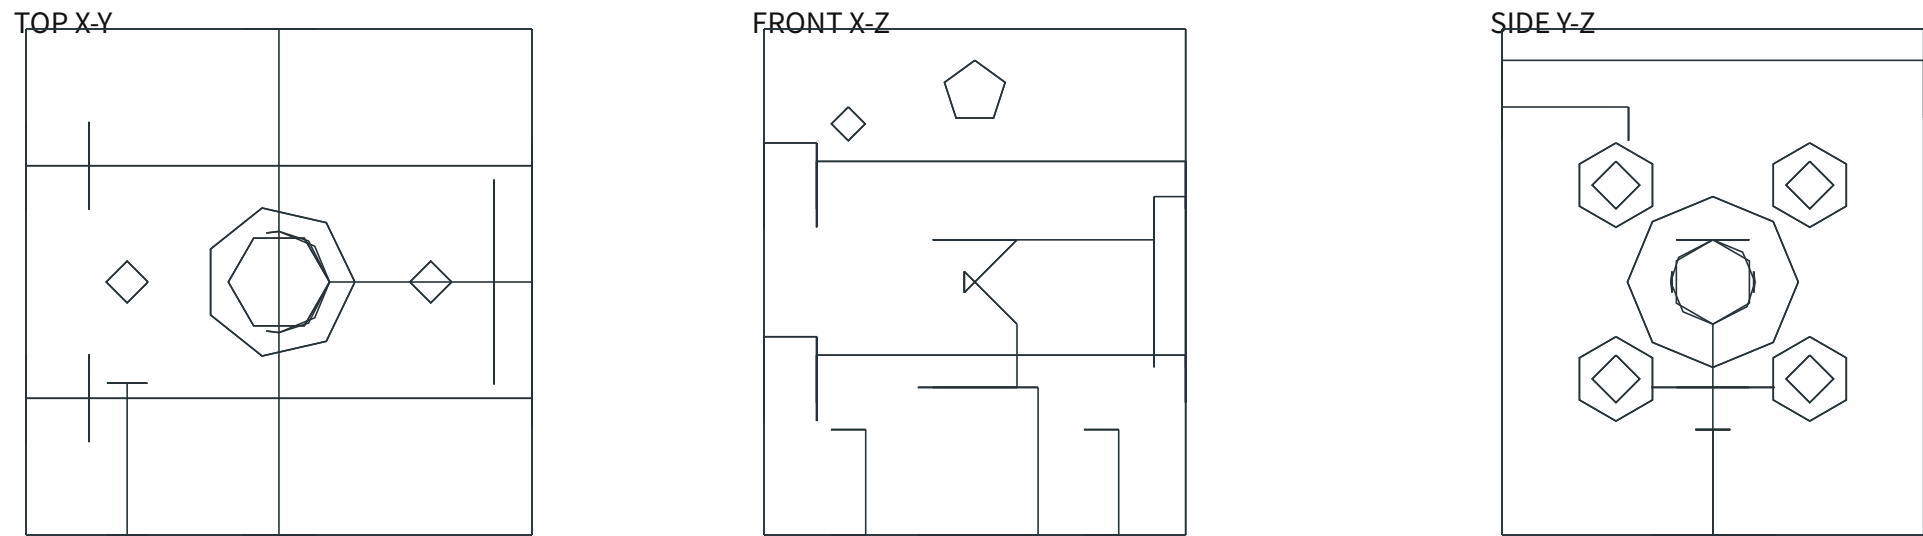

Drawing MFG-EX-DIE-01 | Part EX-DIE-01 — Connected 90 degree down-die body | Qty 1

Rev final-design-fabrication-closure-v0.8 | Units mm | Scale NTS, dimensions govern | Third-angle projection | source commit df59fd138780f538a5fa62dad6e2770b49bf4d94

Material: SCM440 QT + gas nitride | Process/finish: 6-face mill; gun drill/ream intersecting Ø8 channels; counterbore, drill/tap; stress relieve; gas nitride; lap sealing face

Overall: X 40.000 × Y 40.000 × Z 48.000 mm | general tolerance ISO 2768-m unless noted

Critical: 40 x40 x48; barrel datum face X40; Ø8 melt turn; Ø16.20 +0.05/0 x3 breaker seat; Ø12.00 +0.03/0 x14 insert seat; 4x Ø4.5 + Ø8 head recess PCD26; heater Ø6.05 H7 reamed; sensor Ø3.20 blind12; face flatness 0.03; channel intersection fully deburred

GD&T/datums: A=barrel interface face; B=melt-channel axis; C=fastener-pattern centre plane; verify datum marking on supplier inspection report

Inspection: CMM/caliper against STEP and drawing; deburr and visual crack/warp inspection; pin-gauge channels/orifice; face flatness; shielded hydro/hot-polymer containment test

Edges: remove burrs; break unspecified sharp edges C0.3–0.5. No unapproved material/tolerance substitution.

Release: PASS — physical validation NOT_RUN; procurement and machining USER_APPROVAL_REQUIRED.