


# MFG-SP-TR-01 • v0.8 MANUFACTURING DRAWING

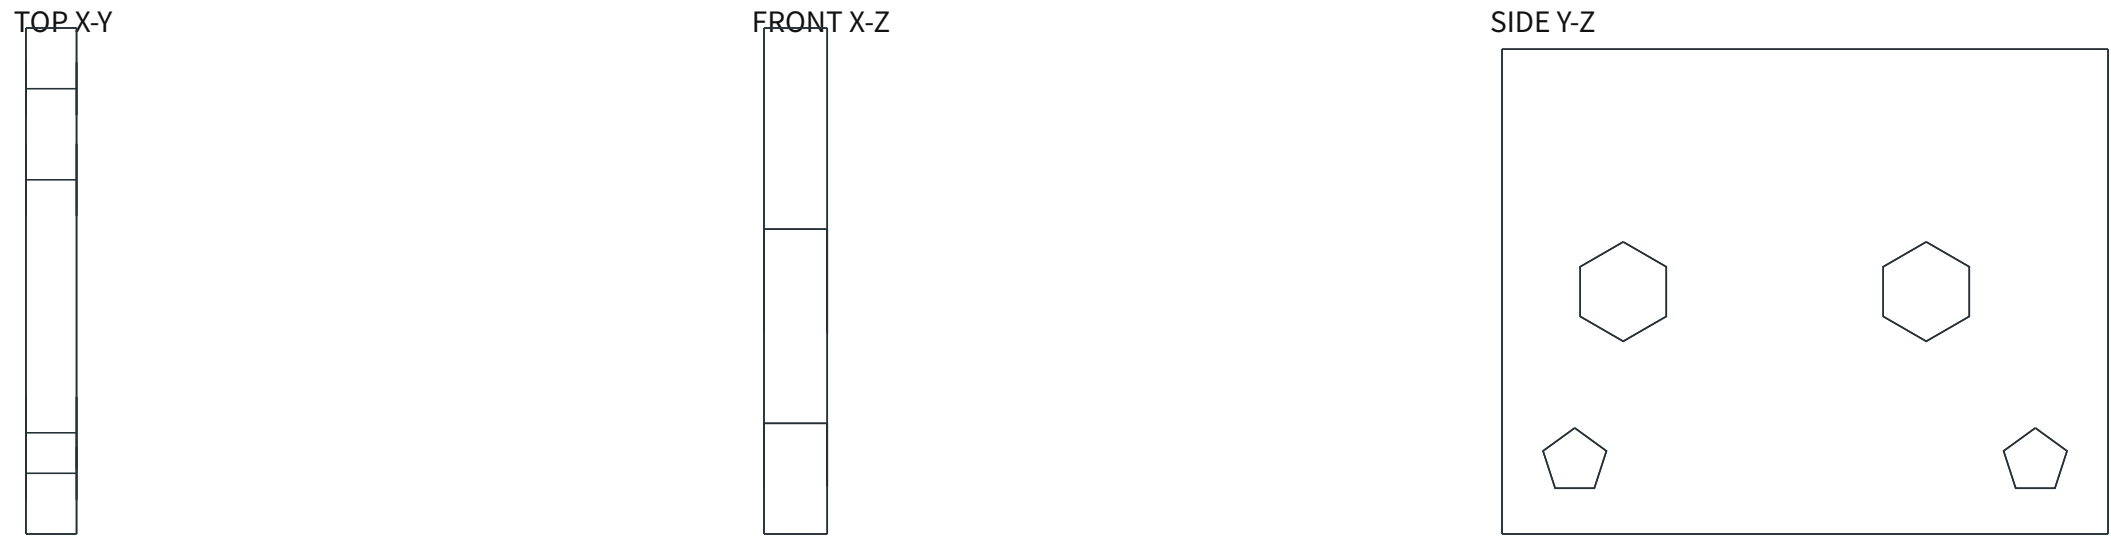

Drawing MFG-SP-TR-01 | Part SP-TR-01 — Traverse rod end plate | Qty 2

Rev final-design-fabrication-closure-v0.8 | Units mm | Scale NTS, dimensions govern | Third-angle projection | source commit df59fd138780f538a5fa62dad6e2770b49bf4d94

Material: 5 mm 6061-T6 | Process/finish: waterjet + ream

Overall: X 5.000 × Y 50.000 × Z 40.000 mm | general tolerance ISO 2768-m unless noted

Critical: 5 x50 x40; two Ø8.2 at 25 mm spacing; 2xØ5.5 mount; matched pair and rod parallelism <=0.10/160

GD&T/datums: A=frame mounting plane; B=primary edge; C=mounting-hole centreline; verify datum marking on supplier inspection report

Inspection: CMM/caliper against STEP and drawing; deburr and visual crack/warp inspection; fit-up, PE bond where metal, reach/access and interlock actuation inspection

Edges: remove burrs; break unspecified sharp edges C0.3–0.5. No unapproved material/tolerance substitution.

Release: PASS — physical validation NOT\_RUN; procurement and machining USER\_APPROVAL\_REQUIRED.