


MFG-CUT-05 • v0.8 MANUFACTURING DRAWING

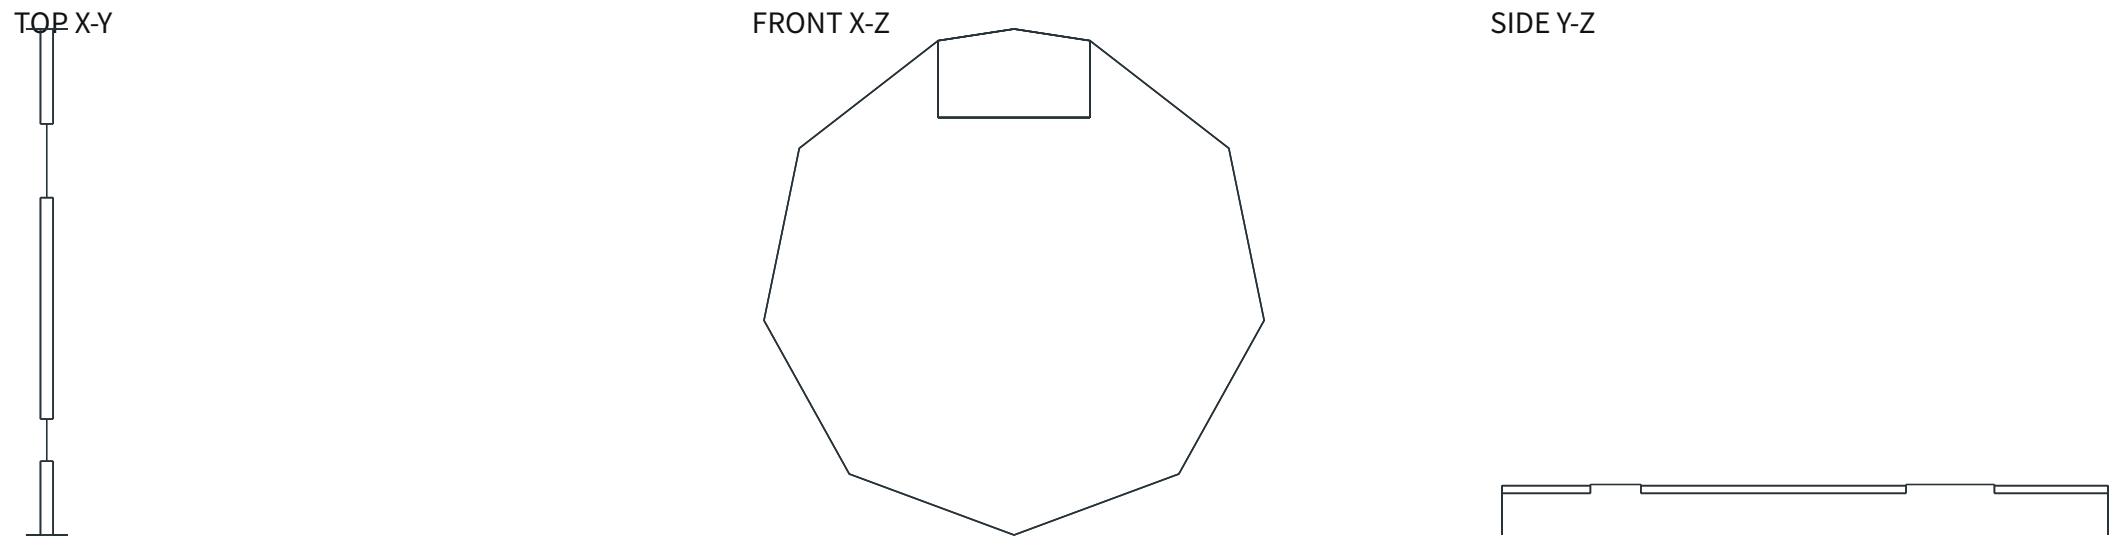

Drawing MFG-CUT-05 | Part CUT-05 — 20 mm keyed cutter shaft | Qty 2

Rev final-design-fabrication-closure-v0.8 | Units mm | Scale NTS, dimensions govern | Third-angle projection | source commit df59fd138780f538a5fa62dad6e2770b49bf4d94

Material: S45C normalized steel HB 170-229 | Process/finish: turn + keyway; black oxide with bearing seats masked

Overall: X 20.000 × Y 240.000 × Z 20.000 mm | general tolerance ISO 2768-m unless noted

Critical: diameter 20 h6 at two 6004 journals per shaft; overall 240.0 +/-0.10; TIR <=0.05; 6 mm keyways at y=0-35, 55-160 and 195-240 from datum end; keyway depth 3.5; install driven shaft at Y258 and slave shaft at Y278 to preserve 20 mm front sprocket clearance; use standard metal clamp collars for axial retention

GD&T/datums: A=common journal axis; B=drive-end shoulder/face; C=keyway or retaining feature plane; verify datum marking on supplier inspection report

Inspection: CMM/caliper against STEP and drawing; deburr and visual crack/warp inspection; micrometer bearing seats; dial-indicator TIR/runout between centres

Edges: remove burrs; break unspecified sharp edges C0.3–0.5. No unapproved material/tolerance substitution.

Release: PASS — physical validation NOT_RUN; procurement and machining USER_APPROVAL_REQUIRED.