


# MFG-CUT-05R • v0.8 MANUFACTURING DRAWING

TOP X-Y



FRONT X-Z

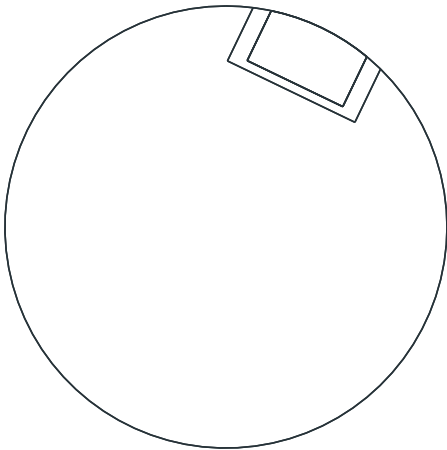

SIDE Y-Z



Drawing MFG-CUT-05R | Part CUT-05R — 25 mm keyed cutter shaft right | Qty 1

Rev final-design-fabrication-closure-v0.8 | Units mm | Scale NTS, dimensions govern | Third-angle projection | source commit 93ec6a9c0c2afa3ad72288a967f07b7c8d03c99e

Material: S45C QT steel | Process/finish: turn + indexed keyway; black oxide with bearing seats masked

Overall: X 25.000 × Y 240.000 × Z 25.000 mm | general tolerance ISO 2768-m unless noted

Critical: continuous  $\varnothing 25 \text{ h6}$  =24.987-25.000 across 61905 journals, cutter land and gear/hub land; overall240.0 +/-0.10; TIR<=0.05; all keyway centreplanes clocked25.714 +/-0.02 deg; 6.005-6.010 keyways at y=0-35 and85-165 with selected key5.995-6.000; 8.005-8.010 keyway at212-240 with selected key7.995-8.000; install driven shaft at Y258

GD&T/datums: A=common journal axis; B=drive-end shoulder/face; C=keyway or retaining feature plane; verify datum marking on supplier inspection report

Inspection: CMM/caliper against STEP and drawing; deburr and visual crack/warp inspection; micrometer bearing seats; dial-indicator TIR/runout between centres

Edges: remove burrs; break unspecified sharp edges C0.3–0.5. No unapproved material/tolerance substitution.

Artifact check: PASS only; fabrication HOLD pending full v0.8 gates. Physical NOT\_RUN; machining USER\_APPROVAL\_REQUIRED.