


MFG-SP-AW-08 · v0.8 MANUFACTURING DRAWING

TOP X-Y



FRONT X-Z

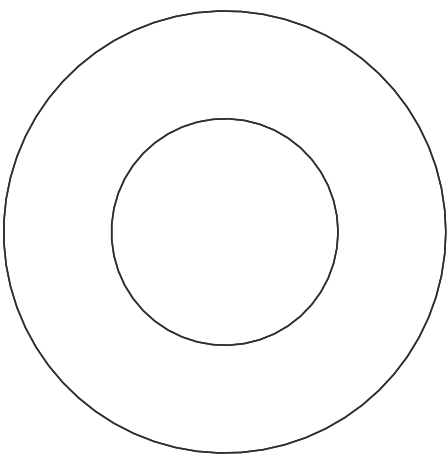

SIDE Y-Z



Drawing MFG-SP-AW-08 | Part SP-AW-08 — Dancer thrust shim washer | Qty 5

Rev final-design-fabrication-closure-v0.8 | Units mm | Scale NTS, dimensions govern | Third-angle projection | source commit 93ec6a9c0c2afa3ad72288a967f07b7c8d03c99e

Material: 304 stainless | Process/finish: precision shim cut + deburr

Overall: X 16.000 × Y 16.000 × Z 0.500 mm | general tolerance ISO 2768-m unless noted

Critical: OD16 +/-0.10; ID8.20 +0.10/0; thickness0.50 +/-0.03; burr free; select/shim for assembled endplay0.10-0.30; 2 pivot and 3 roller stack

GD&T/datums: A=frame mounting plane; B=primary edge; C=mounting-hole centreline; verify datum marking on supplier inspection report

Inspection: CMM/caliper against STEP and drawing; deburr and visual crack/warp inspection; fit-up, PE bond where metal, reach/access and interlock actuation inspection

Edges: remove burrs; break unspecified sharp edges C0.3–0.5. No unapproved material/tolerance substitution.

Artifact check: PASS only; fabrication HOLD pending full v0.8 gates. Physical NOT_RUN; machining USER_APPROVAL_REQUIRED.