


MFG-CUT-09 · v0.8 MANUFACTURING DRAWING

TOP X-Y



FRONT X-Z

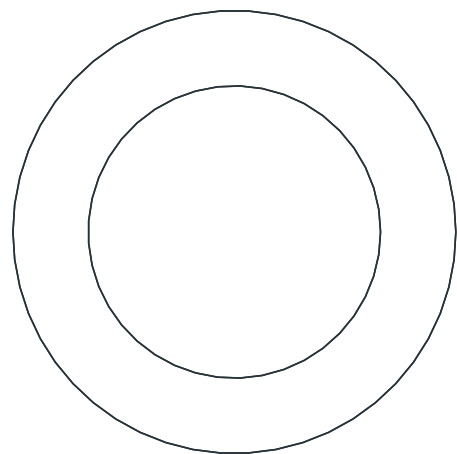

SIDE Y-Z



Drawing MFG-CUT-09 | Part CUT-09 — Shredder chamber distance sleeve | Qty 4

Rev final-design-fabrication-closure-v0.8 | Units mm | Scale NTS, dimensions govern | Third-angle projection | source commit 93ec6a9c0c2afa3ad72288a967f07b7c8d03c99e

Material: S275JR steel | Process/finish: turn, drill/ream and match-face as a set

Overall: X 10.000 × Y 10.000 × Z 128.000 mm | general tolerance ISO 2768-m unless noted

Critical: OD10.00 +/-0.05; ID6.60 +0.10/0; length128.00 +/-0.03; four-piece matched length spread <=0.03; face parallelism <=0.03; deburr C0.2 max

GD&T/datums: A=frame mounting face; B=primary bearing axis; C=secondary bearing/fastener axis; verify datum marking on supplier inspection report

Inspection: CMM/caliper against STEP and drawing; deburr and visual crack/warp inspection; bore gauge; matched-pair centre distance and axis parallelism

Edges: remove burrs; break unspecified sharp edges C0.3–0.5. No unapproved material/tolerance substitution.

Artifact check: PASS only; fabrication HOLD pending full v0.8 gates. Physical NOT_RUN; machining USER_APPROVAL_REQUIRED.