

MFG-EX-THR-01 · v0.8 MANUFACTURING DRAWING


TOP X-Y



FRONT X-Z



SIDE Y-Z

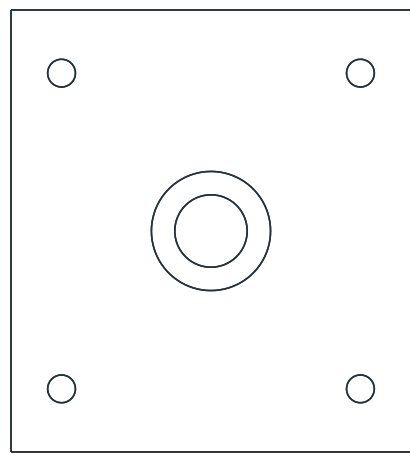

Drawing MFG-EX-THR-01 | Part EX-THR-01 — Extruder thrust plate | Qty 1

Rev final-design-fabrication-closure-v0.8 | Units mm | Scale NTS, dimensions govern | Third-angle projection | source commit 93ec6a9c0c2afa3ad72288a967f07b7c8d03c99e

Material: 12 mm S45C normalized steel | Process/finish: laser rough + bore/seat finish

Overall: X 12.000 × Y 95.000 × Z 105.000 mm | general tolerance ISO 2768-m unless noted

Critical: 12 x95 x105; passage Ø17.2; 51102 pocket Ø28.30 +0.05/0 x9.10 +0.05/0 from marked front face; 4xØ6.6; pocket shoulder square0.05 to bore; NSK general-purpose housing radial clearance >0.25; metal-to-profile load path

GD&T/datums: A=frame mounting face; B=primary bearing axis; C=secondary bearing/fastener axis; verify datum marking on supplier inspection report

Inspection: CMM/caliper against STEP and drawing; deburr and visual crack/warp inspection; bore gauge; matched-pair centre distance and axis parallelism

Edges: remove burrs; break unspecified sharp edges C0.3–0.5. No unapproved material/tolerance substitution.

Artifact check: PASS only; fabrication HOLD pending full v0.8 gates. Physical NOT_RUN; machining USER_APPROVAL_REQUIRED.