


MFG-CUT-02 • v0.8 MANUFACTURING DRAWING

TOP X-Y



FRONT X-Z

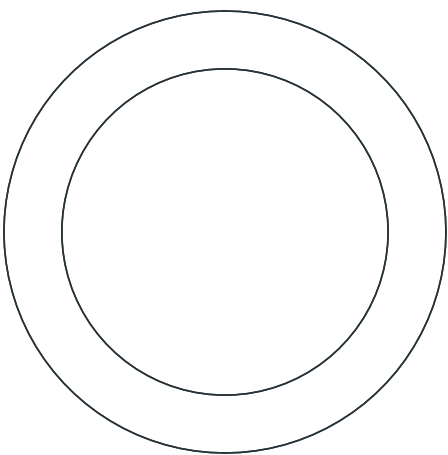

SIDE Y-Z



Drawing MFG-CUT-02 | Part CUT-02 — Cutter spacer | Qty 10

Rev final-design-fabrication-closure-v0.8 | Units mm | Scale NTS, dimensions govern | Third-angle projection | source commit 93ec6a9c0c2afa3ad72288a967f07b7c8d03c99e

Material: S45C normalized steel | Process/finish: turn, then match-grind/lap as one numbered two-shaft stack

Overall: X 34.000 × Y 34.000 × Z 7.000 mm | general tolerance ISO 2768-m unless noted

Critical: OD34.0; bore25.10 +0.05/0; nominal length7.00; faces parallel within0.01; engrave shaft/position; with CUT-01 and 0.05/0.10/0.25 metal shims, every one of 11 opposing axial gaps shall measure0.25-0.50 over one full hand rotation; supply only as the accepted matched set

GD&T/datums: A=shaft bore axis; B=ground stack face; C=keyway centre plane; verify datum marking on supplier inspection report

Inspection: CMM/caliper against STEP and drawing; deburr and visual crack/warp inspection; inspect flatness/parallelism and stack gap with metal shims

Edges: remove burrs; break unspecified sharp edges C0.3–0.5. No unapproved material/tolerance substitution.

Artifact check: PASS only; fabrication HOLD pending full v0.8 gates. Physical NOT_RUN; machining USER_APPROVAL_REQUIRED.