



MFG-IN-HOP-01 • v0.8 MANUFACTURING DRAWING


TOP X-Y

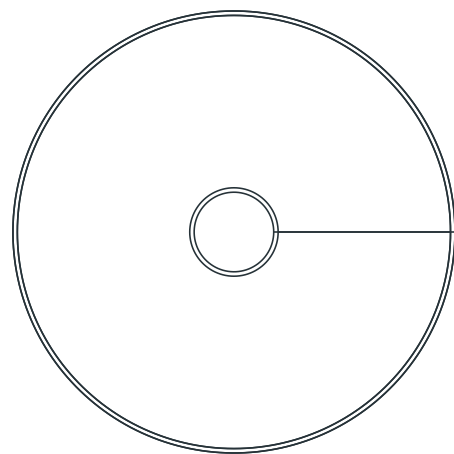

FRONT X-Z

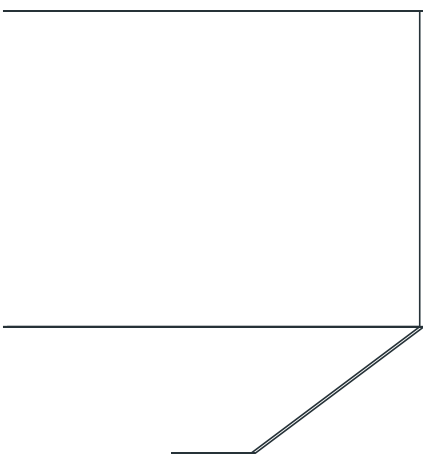

SIDE Y-Z

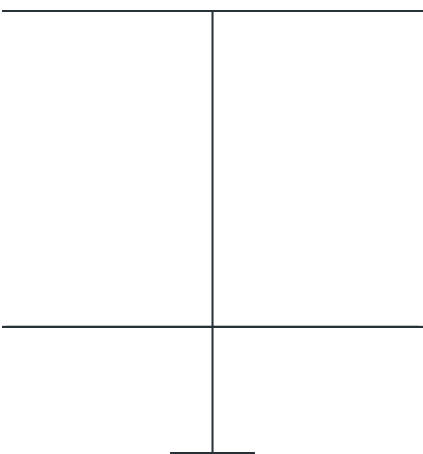

Drawing MFG-IN-HOP-01 | Part IN-HOP-01 — Refillable input hopper | Qty 1

Rev final-design-fabrication-closure-v0.8 | Units mm | Scale NTS, dimensions govern | Third-angle projection | source commit 93ec6a9c0c2afa3ad72288a967f07b7c8d03c99e

Material: 2 mm 5052-H32 aluminum | Process/finish: roll cone/cylinder + TIG weld + deburr

Overall: X 200.000 × Y 200.000 × Z 210.000 mm | general tolerance ISO 2768-m unless noted

Critical: OD200 x straight150 + cone60; outlet Ø40; wall 2.0; lid rail datum flatness 0.5; leak-free dry-flake seams

GD&T/datums: A=material-flow axis; B=mounting face; C=drive/sensor centre plane; verify datum marking on supplier inspection report

Inspection: CMM/caliper against STEP and drawing; deburr and visual crack/warp inspection; dry assembly rotation and cleanout/dead-pocket inspection

Edges: remove burrs; break unspecified sharp edges C0.3–0.5. No unapproved material/tolerance substitution.

Artifact check: PASS only; fabrication HOLD pending full v0.8 gates. Physical NOT_RUN; machining USER_APPROVAL_REQUIRED.