



MFG-FM-GR-01 · v0.8 MANUFACTURING DRAWING


TOP X-Y

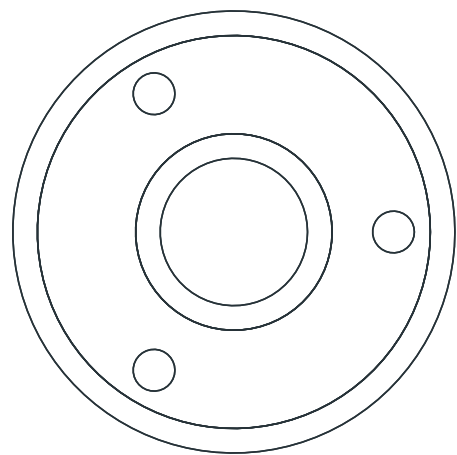

FRONT X-Z

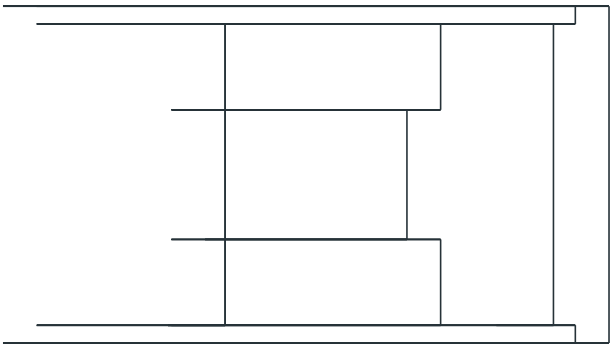

SIDE Y-Z

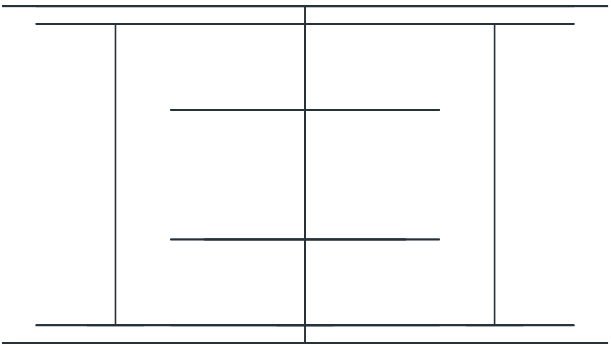

Drawing MFG-FM-GR-01 | Part FM-GR-01 — Solid-strand guide roller | Qty 1

Rev final-design-fabrication-closure-v0.8 | Units mm | Scale NTS, dimensions govern | Third-angle projection | source commit 93ec6a9c0c2afa3ad72288a967f07b7c8d03c99e

Material: POM-C | Process/finish: turn + bearing-seat bore

Overall: X 36.000 × Y 36.000 × Z 20.000 mm | general tolerance ISO 2768-m unless noted

Critical: OD36 x20; 2x Ø32 x1.05 cap recesses; 2x Ø16 H7 x5.10 bearing pockets from cap inner faces; Ø12 through relief; 3xØ3.4 PCD26 through; seat shoulders square0.05; polished Ra<=1.6

GD&T/datums: A=frame mounting plane; B=primary edge; C=mounting-hole centreline; verify datum marking on supplier inspection report

Inspection: CMM/caliper against STEP and drawing; deburr and visual crack/warp inspection; fit-up, PE bond where metal, reach/access and interlock actuation inspection

Edges: remove burrs; break unspecified sharp edges C0.3–0.5. No unapproved material/tolerance substitution.

Artifact check: PASS only; fabrication HOLD pending full v0.8 gates. Physical NOT_RUN; machining USER_APPROVAL_REQUIRED.